

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Tracewell HPC-4K* at our website: ***Click HERE***

COMTEL ELECTRONICS

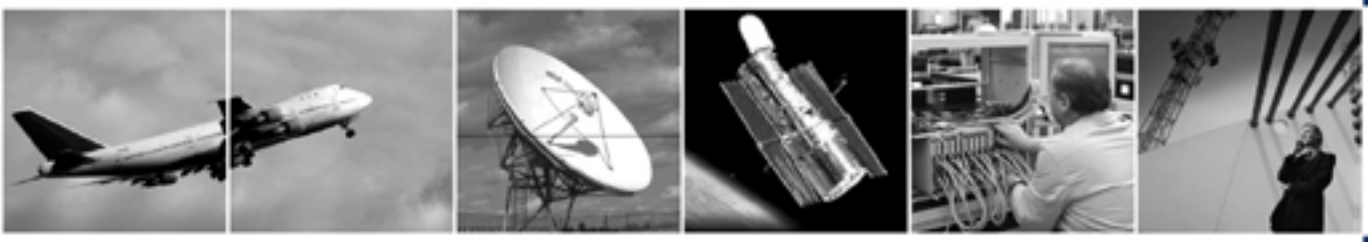

HPC VXI System



VXI bus

MEMBER VITA Open Standards, Open Markets

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Company Profile



Comtel Electronics GmbH has acquired a leadership position in the business of electrical interconnection components and systems, both as a manufacturer of standard and custom products and as a supplier of design service and custom prototypes.

The key reason for Comtel's success in the market has been the close collaboration with our customers.
These are leading international high-technology companies active in the telecommunications, data processing, military and aerospace markets in the design and manufacturing of innovative products.

Our custom Backplane engineering expertise has a proven track record. We provide optimized designs that meet all electrical requirements and are cheaper and easier to produce.
We specialize in re-designing existing Backplanes to reduce layer-counts and therefore the cost. Right first time, conformance to industry norms, Design For Manufacturing (DFM) and Design For Testing (DFT) are all areas of custom Backplane engineering in which we excel.
The latest CAD and simulation tools along side full measurement and characterization facilities form the basis of this technological lead.


Comtel designs and manufactures standard-architecture Backplanes, custom-specific Backplanes, sub-racks and integrated enclosures. Our standard-architecture product range includes VME, VME64x, VXI, VXS CompactPCI, PXI, AdvancedTCA® and microTCA™.

Comtel, as an IS0 9000:2000 certified manufacturer, uses fully automated fabrication and assembly processes and sophisticated Design To Production (DTP) techniques guaranteeing consistently high quality product while benefiting from reduced manufacturing costs.
Backplane testing using various techniques to gain the best coverage including in-circuit-test, functional, burn-in and high pin count capabilities.

Our objective is to continue development of our resources to stay at the forefront of Backplane and System technology. We provide consequently innovative Backplane and System solutions, which meet the ever-increasing technical and commercial demands of the global market.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Data Sheet

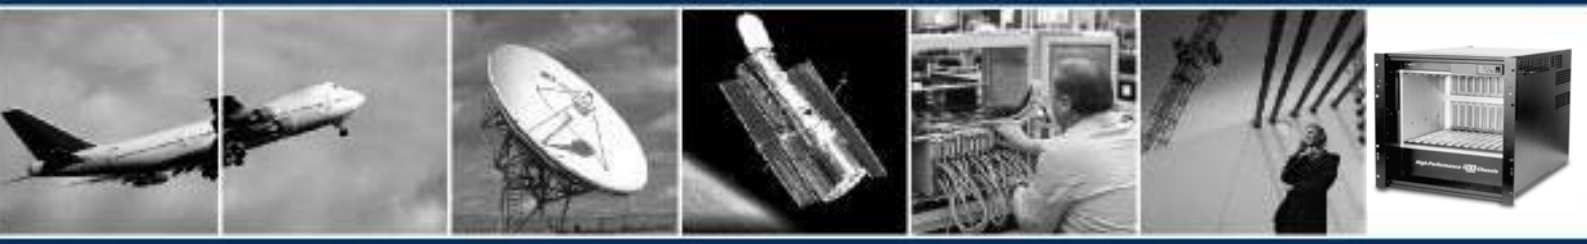

HPC VXI System

High-Performance 13 Slot C Size VXI System

Revision *1.000*

Date *March 25th, 2004*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Introduction



System Front view



Features

- **Low-profile only 10U**
- **2KW or 4KW plugging power system**
- **13 slot high-current VXI Backplane**
- **Plugging fan module with (2) 340 cfm fans**
- **300 cfm of airflow at 0.125" of H2O restriction**
- **Intelligent monitoring with remote output**
- **VXI plug & play compliant for 1 & 2-tier receivers**
- **Temperature monitor and cable tray options**
- **TÜV Product Service certified to EN60950**
- **High-performance digital test ready**

Overview

The Comtel HPC VXI is the industry's highest performance 13-slot, C size VXI chassis. Featuring increased power and cooling, system monitoring, and a rugged modular design, HPC VXI is ideal for the latest generation of high-performance VXI instrumentation.

Capable of delivering over 3000W through the backplane, the Comtel HPC VXI is available with single or dual power supplies that plug directly into the backplane, eliminating high-current DC wiring while providing exceptional dynamic load response. To efficiently manage this amount of power, the 13-slot backplane uses a unique power distribution scheme and special high current DIN connectors. The highflow fan module is also pluggable and supplies 300 cfm of airflow at 0.125" of H2O board restriction in a fully loaded chassis.


Comtel HPC VXI also features comprehensive system monitoring. This intelligent system provides a warning to the operator when power and cooling readings go out of tolerance. The power monitor continuously verifies all seven VXI DC voltages, and has the unique ability to notify the user of a past voltage fault even if it returns to normal. The cooling monitor verifies fan function and is also available with a temperature monitor option. In the event a cooling fault is detected, the monitor shuts down the system to prevent costly damage to the installed VXI boards. A front panel display provides local status for power and cooling as well as other major system functions. In addition, a rear connector outputs both power and cooling monitor information for remote site operation.

This VXI plug & play compatible chassis occupies just 10U of rack space and is designed to accommodate a single tier receiver assembly. Using the optional extender kit, double-tier receiver assemblies can also be used. Other options include bottom mounted cable tray and rack slides.


Mechanical




Main Assembly

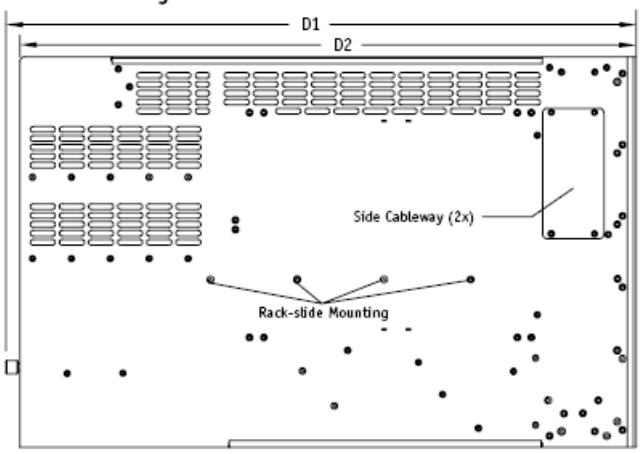


Left-side View

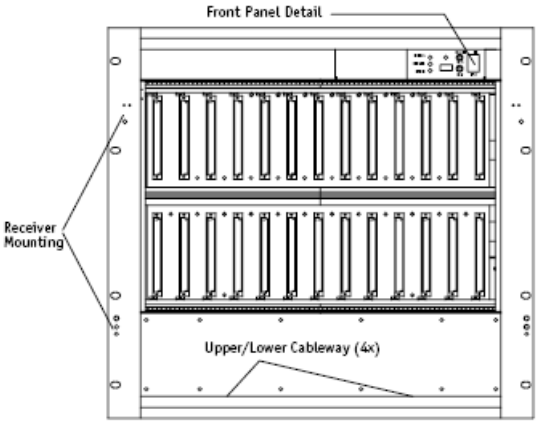

Front View

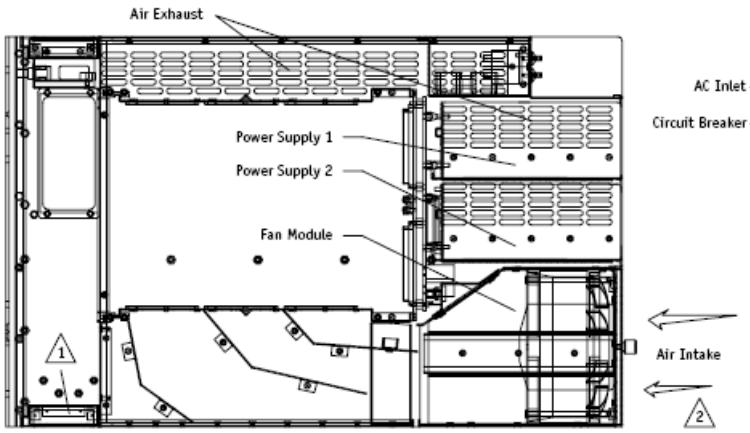


Right-side View (internal)

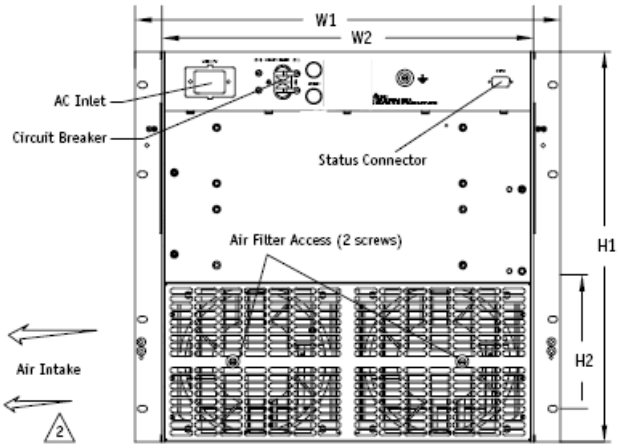


Rear View


Sub-Assemblies and Options



Cabletray (2U) Kit



13U Adapter Kit

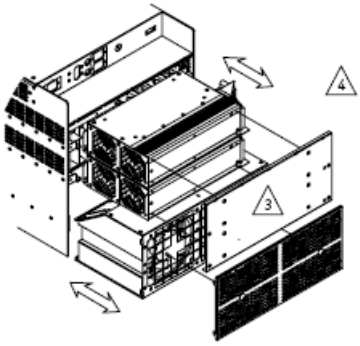


Rear Accessible Fan and Power Modules

Status Connector Pinout:

PIN	FUNCTION
1	Chassis Ground
2	Low Voltage NC Relay
3	Low Voltage NC Relay
4	Low Voltage NO Relay
5	Low Voltage NO Relay
6	Airflow Shutdown NC Relay
7	Airflow Shutdown NC Relay
8	Airflow Shutdown NO Relay
9	Airflow Shutdown NO Relay

Front Panel Detail:

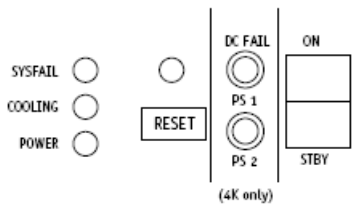

Dimensions:

D1: 28.15" (715 mm)	W1: 19.00" (483 mm)	H1: 17.47" (444 mm)
D2: 27.52" (699 mm)	W2: 16.61" (422 mm)	H2: 6.00" (153 mm)
D3: 12.09" (307 mm)	W3: 15.56" (395 mm)	H3: 3.05" (78 mm)
D4: 23.18" (589 mm)		

Notes:

1. Lower cross member moves down for 13U adapter kit
2. Do not obstruct intake or exhaust vents
3. Power supply cover removes with (12) 6-32 screws
4. Disconnect AC power prior to service

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specification



Physical

Construction:
Sheet aluminum, 5052-H32 alloy; sides (0.125"), top/bottom covers, HPC-4K power supply cover (0.050"), fan housing (0.062") optional 2U cabletray (0.080")
Sheet steel, ASTM A366; upper/lower cardcages, upper/lower front cableways/covers, HPC-2K power supply cover (0.060")
Aluminum extrusion**,** 6101-T6 alloy; cardcage front and mid profiles, rack flanges
Card guide**,** snap-in, 0.062" pcb thickness, white nylon, UL 94V-2 flame rated material

Card Cage: Front loading, 6U x 340mm 'C' size, 13 slots maximum, IEEE 1101.1

Dimensions: 28.15"D (715 mm), 19.0" W (483 mm), 17.47" H (10U; 444 mm)

Weight: 73 lbs. (33.2 kg; HPC-2K), 85 lbs. (38.6 kg; HPC-4K)

Finish: Textured paint, Carbide Black per Sherwin Williams F63B12; all exterior surfaces; All other aluminium is brushed gold chromate per MIL-STD 5541, steel is black paint over primer

Cableways: 6 front cableways with covers; (2) upper, (2) lower and 1 per side

Rack-Slides: Designed to accept General Devices #CTHRS-124 rack slides

Cable Tray: Optional 2U cabletray attaches to bottom of unit; capable of supporting up to 200 lbs. during bench-top operation; includes mounting hardware; **3U extender kits**: two optional 3U extender kits available for mounting single or double-tier Virginia Panel Series 90 receiver frames; kit includes extended 14U front flanges, 3U side supports and mounting hardware; can be used with the optional 2U cabletray

Backplane

General: 13 slot, VXI 'C' size monolithic, 96 pin high current DIN connectors

Bus structure: VXI 32 bit

Assembly: SMT/press-fit assembly

Layer count: 8 layers

Control: Active automatic bus-grant and IACK jumpering, active termination

PCB construction: FR4 epoxy-glass laminate, multilayer, all-stripline, SMOBC, silkscreen on two sides, 1oz. copper signal and power planes minimum, UL94V-0, 0.125" (3.18mm) pcb thickness

Impedance: 50 Ohms nominal on all signal lines, non-loaded pcb

Termination: Active onboard, electrically inboard; Thevinin equivalent to 194 Ohms at 2.94V

Decoupling: High frequency decoupling at each slot (0.1F SMD ceramic); Bulk distributed low frequency (100F SMD Tantalum)

DC distribution: High current power midplane distributes power from plugging power supplies to backplane

Compliance: VXI-1 Rev. 1.4

Power

Option codes PS1: HPC-2K with single 2KW power supply, AC input with PFC

Option codes PS2: HPC-4K with two 2KW power supplies, AC input with PFC

Total output: ***HPC-2K***- 2,000W maximum all outputs
HPC-4K- 3,415W maximum all outputs

Input: 90 – 264VAC, universal input

Frequency: 47 – 63 Hz

Efficiency: 75% typical

Power factor: 0.99 with PFC

Input current: 15A maximum (12A recommended; HPC-2K)
20A maximum (16A recommended, HPC-4K)

Inrush current: ***HPC-2K***- 90V/20A, 190V/29A, 208V/32A, 50V/38A
HPC-4K- 90V/40A, 190V/58A, 208V/64A, 250V/76A

Hold-up time: 20 ms minimum after removal of power at full load

ACFAIL: Logic low signal asserted to backplane after removal of AC power

DC outputs: ***HPC-2K:*** +5V/80A, -5.2V/60A, -2.2V/60A, +/-12V/18A (ea.), +/-24V/10A (ea.)
HPC-4K: *SUPPLY 1* (upper): +/-12V/36.0A (ea.), -2.2V/120A, +5V/120A; *SUPPLY 2* (lower): -5.2V/120A, +/-24V/30A (ea.)

Output adjustment: All outputs are adjusted at factory

Ripple/Noise: Less than 1% peak-to-peak or 50mV, whichever is greater; bandwidth limited to 20MHz

Load requirement: 10% minimum load required on + and – 24VDC

Remote sense: All outputs, 500mV maximum compensation

Inhibit: Global DC inhibit (wired to front panel switch)

Cooling

Airflow: Rear intake, top/side exhaust, ducted plenum, pressurized

Fan: (2) 340 cfm, high-pressure tube-axial, 24VDC

Air filter: Front accessible, washable media, 30 PPI, tool accessible

Accessibility: Rear removable plugging module; tool accessible (philips driver)



Control and Input

Switches: Front panel: AC on/off (rocker); reset (pushbutton, momentary)

Reset control: 200ms debounced reset to backplane; asserted by front panel reset switch or VME module; also provides monitor reset

SYSFAIL: Signal driven only by backplane VME modules; front panel LED is only a status indicator

Indicators: Front panel SYSRESET, SYSFAIL DC Fault (red), power and cooling (tri-color) LED indicators

Power input: Rear panel AC inlet (IEC320) with fuse drawer, line cord provided with NEMA L6-20R plug, cord retainer bail

Circuit protection: Rear panel 2-pole magnetic switched circuit breaker; 15A (HPC-2K), 20A (HPC-4K)

Monitoring

Option codes M1: HPC chassis with multi-point, exhaust air temperature monitor

Interface: Front panel LED indicators and rear panel 9-pin status connector

Functions:
Power: 7 independent voltage monitors for +5, -5.2, -2.2, +/-12, and +/-24VDC; power fault is generated when any voltage falls below 90% of nominal; power fault is a latched signal to record intermittent conditions; power DC Fault monitor (HPC-4K only); a power fault drives both a front panel LED and rear panel relay closure
Cooling: verifies RPM and voltage for each fan; cooling fault is generated if fan speed falls below 50% of nominal or 24V not present; a cooling fault drives front panel LED, rear panel relay closure and a system shutdown using global DC inhibit
Optional multi-point, exhaust air temperature (M1): 13 sensors distributed across top of cardcage monitor exhaust air temperature; cooling fault generated for air temperature >60oC
Monitor reset: all monitor faults are latching and can be reset by depressing front panel reset button or by cycling AC power; 5 second delay occurs after any reset prior to further fault detection

Outputs: ***Power LED:*** Green = no fault exists; Red = fault currently exists; Yellow = intermittent fault occurrence
Cooling LED: Green = no fault exists; Red = system shutdown due to cooling fault; Yellow = system shutdown due to non-cooling fault (i.e. loss of fan power)
DC Fault LED: *(A and B):* power supply global DC OKAY monitor (red indicates fault; HPC-4K only)
Rear panel 9-pin remote status connector (AMP p/n 747321-4): Power and cooling faults drive relay closure
(see status connector pinout)

Environmental

Temperature: 0 – 50oC operating; -20 – 70oC non-operating

Shock/ Vibration: Basic transportation per ASTM 0775
Humidity: 5 – 95% non-condensing at 40oC operating, 0 – 95% nonoperating

Acoustic: <68 dBa (1 meter)

Warranty

1 year limited warranty

Ordering Information

The Comtel HPC VXI includes chassis, backplane, power supply, cooling and monitoring per the following standard configurations:

Part Number: Description:

- **590-1006-F00-01** HPC-2K chassis with 2KW power system (PS1)
- **590-1006-F00-02** HPC-2K chassis with 2KW power system (PS1), multi-point temperature monitor (M1)
- **590-1003-F01-01** HPC-4K chassis with 4KW power system (PS2)
- **590-1003-F01-02** HPC-4K chassis with 4KW power system (PS2), multi-point temperature monitor (M1)

Accessories

- **106-1006-099-01** Non-shielded single-slot filler panel, 6U X 8T; installs in vacant slots
- **590-1105-C00-00** 13U adapter kit for single-tier Virginia Panel Series 90 receiver
- **590-1102-C00-00** 13U adapter kit for double-tier Virginia Panel Series 90 receiver
- **590-1101-C00-00** Cabletray (2U) kit

Notes:

- The HPC product line is specially designed for use with Teradyne M9xx high-performance VXI digital test modules. These modules require a VXI backplane voltage setting of -2.2Vdc for proper operation. All HPC chassis part numbers above are shipped with this -2.2V output setting. As an order option, Comtel can provide HPC chassis pre-configured with the VXI specified -2.0Vdc output for applications that do not use Teradyne M9xx modules and specifically require the VXI specified output. Please contact the factory for more details.
- The HPC VXI utilizes a unique plugging power design to achieve the power performance referenced above. These module power supplies, although similar in appearance, are not interchangeable between versions. Mechanical measures have been taken to prevent accidental installation across versions.
- Emissions information is available for the power supplies only. As an option, Comtel can evaluate agency compliance for the customer's specific integrated Product. Consult factory for more details.

Agency Compliance

Safety: TÜV Product Service certified to EN60950; #B 98 11 32557 003

Emissions: See note above

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

COMTEL ELECTRONICS





Headquarters Germany Comtel Electronics GmbH, Technopark I, Bretonischer Ring 3, 85630 Grasbrunn, Tel: +49 89 437789 0, Fax: +49 89 437789 77, sales@comtel-online.de **Sales & Marketing Switzerland** Comtel Industries AG, Espace de l'Europe 18, 2000 Neuchâtel, Tel: + 41 32 724 63 00, Fax: + 41 32 724 06 87, sales@comtel-online.ch **United Kingdom** Comtel UK Ltd, 4 Highland Drive, Fleet, Hampshire, GU51 2TH, Tel: +44 1252 657115, Fax: +44 870 7621936, p.bishop@comtel-online.com **Israel** Comtel Israel Ltd, 20 Hataas st., Kefar-Saba 44425, Tel: +972 9 76 77 240 Fax: +972 9 76 77 243, sales@comtel.co.il **USA** Tracewell System, 567 Enterprise Drive, Westerville, Ohio 43081, Tel. +1 614 846 6175, Fax: +1 614 846 4450, mlong@tracewell.com - Carlo Gavazzi Computing Solutions, 10 Mupac Drive, Brockton, MA 02301, Tel: +1 508 588 6110, Fax: +1 508 588 0498, stevec@mupac.com **Italy** Eurolink Systems, Via Piedicavallo 51-2B, 00166 Roma-I, Tel: +39 06 619140 1, Fax: +39 06 619140 200 sales@eurolinksystems.com **China** MTCS Systems Engineering Co., Ltd. Chang Chun Qiao Road, Haidian District, Beijing 100089, Tel: +86 10 5881 6565, Fax: +86 10 5881 6566, sales@mtcs.com.cn **South Africa** Eagle Technology, 31 - 35 Hout Street, Cape Town 8000, Tel: +27 21 423 4943, Fax: +27 21 424 4637, alan@eagle.co.za **Slovenia** IR ELECTRONIC, Ziherlova ulica 2, SI-1000 Ljubljana, Tel: + 386 1 420 13 84, Fax: + 386 1 283 56 05, mstrajnar@arrowslovenia.com **Russia** Comtel Ru, Saint-Petersburg, Tel: +7 812 9120247, Fax: +7 812 3664794, s.tereschenko@comtel-online.com

Visit our website: www.comtel-online.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP