



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



Model VME-SG 2

VME Plug-In Card Synchronized Generator

KEY FEATURES

- Synchronize to external IRIG or use as standalone generator
- BCD time, microseconds through years
- IRIG-B and 1 PPS outputs
- Time compare output
- External event input

The VME-SG 2 is a 6U, VME-compatible circuit card that supplies precise time to a VME-based computer. Time and status information is available to the VME computer bus in five packed, 16-bit, BCD words. On-board DIP switches select the memory address space where the board resides.

Two independent time-freeze registers provide time on request from the VME bus, or in response to an externally generated pulse. The rate generator can be configured to output a pulse and produce interrupts at selected intervals. Four independently programmable interrupts are available and each has software-selectable priority. The dual time compare feature can generate output pulses and interrupts with microsecond resolution. In the stand-alone mode, generator time is preset and started and stopped under software control.

The IRIG-B code generator provides the capability to generate and output both 1 kHz amplitude modulated IRIG-B and IRIG-B using RS-422 levels. This feature enables the VME-SG 2 to supply timing to remote displays, tape recorders, and other code equipment in locations where IRIG-B is not otherwise available.

The front panel display option provides time, date, position, and operational status. The display consists of four lines of high-intensity LED alphanumeric characters and a push-button select switch. This option requires a 2-wide card.

If a long cable run is required between a VME master and slave, the RS-422 IRIG-B synchronized generator mode provides excellent time transfer accuracy.



VME-SG 2 Specifications

SYNCHRONIZED GENERATOR MODE

- Analog Input Code: IRIG-B
 - Ratio: 2:1 to 5:1
 - Amplitude: 0.5 to 10 Vpp
 - Impedance: 10k ohms to GND
 - Timing Accuracy: 1 microsecond to input code
 - Connector: BNC and P2
- DC Shift Input Codes:
 - Levels: TTL or RS-422
 - Timing Accuracy: 1 microsecond to input code
 - Connector: BNC and P2
- Error Bypass: 3 frames

STAND-ALONE GENERATOR MODE

Generator time may be started, stopped, and preset to within 1 millisecond.

GENERAL SPECIFICATIONS

- IRIG-B Serial-Code Output (Analog):
 - Amplitude: Adjustable 0 V to 10 Vpp
 - Impedance: 10k ohms to ground
 - Ratio: Adjustable 2:1 to 5:1
 - Connector: Front panel BNC, P2
- IRIG-B Serial Code Outputs:
 - Levels: TTL or RS-422
 - Connector: Both signals on P2 connector
- Oscillator:
 - Accuracy: Disciplines to input code to 1x10⁻⁸
 - Stability: 1 PPM, 0°C to +50°C
- 1 PPS Pulse Rate:
 - Level: 0 V, 5 V @ ±6 mA
 - Timing: Positive going on time
 - Duty Cycle: 20%
- Leap Year: Calculated automatically using year information
- Programmable Pulse Rate Output:
 - Rates: Configured to produce interrupt and freeze time at selected rates (1 PPS, 10 PPS, 100 PPS, 1 kPPS, 10 kPPS)
 - Timing: Positive going
 - Level: 0 V, 5 V @ ±6 mA
 - Connector: P2
- External Event Input:
 - Edge: Selectable rising or falling
 - Input Voltage: 0 V low, 2.5 to 5 Vdc high
 - Input Impedance: 4.7k ohms to 5 Vdc
 - Connector: BNC or P2
 - Resolution: Days through microseconds
- External Generator Start Input:
 - Timing: Selectable positive or negative edge
 - Level: 0 V, 5 Vdc
 - Impedance: 4.7k ohms
 - Connector: P2

- Dual Time Compare Output:
 - Outputs a pulse at the programmed compare time #1
 - Outputs a pulse at the programmed compare time #2
 - Resolution: Hundreds of days through microseconds
 - Pulse Width: Two milliseconds
 - Compare Mask: Days through milliseconds
 - Outputs: On P2 connector
 - Level: Positive going at the respective compare time


CONTROLS

The VME-SG 2 is configured as an A16/D16 slave board responding to the Address Modifier codes hex 29 (short nonprivileged) and hex 2D (short supervisory). The VME-SG 2 can be memory mapped on any 256-byte boundary of the VME bus short address space using the 8-position DIP switch located on the board.

- Data Format: Time of year and status are supplied to the VME bus in five packed, 16-bit, BCD words as follows:
 - Word 1 - Umsec Hmsec Tmsec Upsec
 - Word 2 - Tsec Usec Hmsec Tmsec
 - Word 3 - Thours Uhours Tmin Umin
 - Word 4 - Status Hdays Tdays Udays
 - Word 5 - THyear Hyear Tyear Uyear
- Access Time: Falling edge of /DSA to falling edge of /DTAK is 400 ns
- Interrupts: Each of the four independent interrupts can be configured to any of the seven priority levels. Available interrupt sources are:
 - INT0 - External event
 - INT1 - Programmed rate generator
 - INT2 - Programmed compare time #1
 - INT3 - Programmed compare time #2
- Indicator LEDs: Phase lock and error status 1 PPS and power.

MECHANICAL/ENVIRONMENTAL

- Power: 5 V @ 1A (1.2 A with optional display)
 - 12 V @ 50 mA
 - 12 V @ 50 mA
- Size: Standard VME single-wide board (6U)
- Operating Temperature: 0°C to +50°C
- Storage Temperature: -17°C to +85°C
- Humidity: To 95%, noncondensing
- Certification: CE

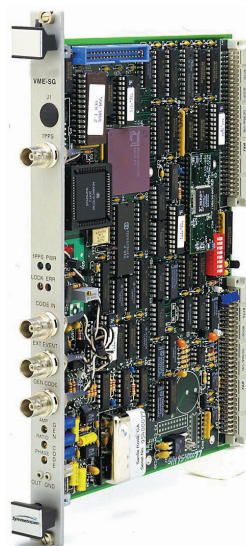

SYMMETRICOM, INC.
2300 Orchard Parkway
San Jose, California
95131-1017
tel: 408.433.0910
fax: 408.428.7896
info@symmetricom.com
www.symmetricom.com

©2003 Symmetricom. Symmetricom and the Symmetricom logo are registered trademarks of Symmetricom, Inc. All specifications subject to change without notice.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com