

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

MEDIMOD® AL-070UM

AC INPUT / MEDICAL APPROVED 70 WATT POWER PLATFORM

5.00 x 3.00 x 1.00" | 127.0 x 76.2 x 25.4mm



DESCRIPTION

UNIPOWER's MEDIMOD® AL-070UM SERIES is a 70 Watt Medical Power Supply platform with both standard and configurable models featuring output voltage(s) that can be quickly configured to order while maintaining all international safety approvals.

These power supplies are available in single or triple output configurations with outputs ranging from 1.5 to 48 VDC. The AL-070UM feature an industry-standard footprint; universal AC input; international safety approvals; Class B emissions; and -20 ~ +70°C operation (see derating).

MEDIMOD® UPGRADES include a multitude of output voltage configurations, extended temperature operating range, attached wire harnesses and much, much more. All these modifications are available without any impact on safety approvals to reduce both development cost and time to market.

FEATURES

- Universal AC Input Range
- Industry-Standard 3" x 5" Footprint
- 1 or 3 Outputs configurable from 1.5~48VDC
- Medical Safety Approvals
- >500k Hours MTBF, Demonstrated
- Optional -40°C Guaranteed Start-Up
- Double Sided PC Board

Contact UNIPOWER to discuss your application and define the right part number for your specific application:

Tel: +1-954-905-1070
Email: the.power.solution@unipowerco.com

For the DC input version see DCMOD AL-070D datasheet

For the ITE Approved version see EASYMOD AL-070U datasheet

FIVE YEAR WARRANTY

INTERNATIONAL STANDARDS

UL/cUL 60601-1 3rd Ed.
EN60601-1 3rd Ed.
CB Report, IEC60601-1
CE Mark (LVD)

"IF WHAT YOU SEE IS WHAT YOU DON'T WANT, IT CAN EASILY BE CHANGED." The MEDIMOD® family of switching power supplies has been designed with two precepts; (1) the laws of physics are immutable, and (2) the satisfaction of customer requirements and needs is paramount.

A host of modifications, only some of which are listed below, can and will be performed on products for customer programs requiring as few as 250 units per year. These "mods" are available at nominal premium (if any), normally without non-recurring engineering costs (although a one time documentation fee may be incurred), and usually with all safety agency approvals in place. This minimizes both product development cost and new product time to market. Effectively, MEDIMODs® allow small program requirements the luxury of costly custom power supply designs.

TYPICAL MODIFICATIONS

- Unique Output Combinations from 1.5 to >48 volts
- Low Output Ripple and Noise
- Extended Temperature Operating Range
- -40°C Start-Up
- Zero Load Operation

FLEXIBLE OUTPUT CONFIGURATION GUIDELINES

with 90-264 VAC Input and -20-50°C Operation

Single Output Capabilities

OUTPUT CURRENT	1.5~3.3V	5V	12V	15V	24V	48V
MINIMUM	0A	0A	0A	0A	0A	0A
CONVECTION (3)	10A	10A	4.2A	3.3A	2.1A	1.1A
10 CFM AIR (4)	14A	14A	5.9A	4.6A	3.0A	1.4A
PEAK (5)	15A	15A	6.5A	5.0A	3.5A	1.5A

Multiple Output Capabilities

OUTPUT	DC OUTPUT	MIN	CON (3)	AIR (4)	PEAK (4, 5)
V1	1.5 ~ 48V (7)	0.80A (2, 12)	8.0A	14.0A	15.0A
V2	1.5 ~ 48V (8)	0.40A (2, 12)	4.0A	7.0A	8.0A
V3	1.5 ~ 48V (8)	0.20A (2, 12)	2.0A	2.5A	3.0A

(1) Full power out on V3 with minimal V1 and V2 loading—Option.
(2) 10% minimum load for stated regulation on multiple O/P units.
(3) Convection cooling.
(4) 15 CFM forced air cooling conditions.
(5) 30 seconds maximum duration.
(6) Most output combinations from 1.5 to 48+ Volts possible; up to maximum rated Current / Power...Consult UNIPOWER.
(7) Specify 0.1V increments.
(8) Specific output voltage is current dependent.
(9) Regulation may degrade under some output Consult UNIPOWER.
(10) Consult UNIPOWER for Model #.
(11) For outputs >48 Volts, consult UNIPOWER.
(12) 10% minimum of marked rating.

Contact UNIPOWER to discuss your application and define the right part number for your specific application:

Call: +1-954-905-1070 • Email: the.power.solution@unipowerco.com

For the DC input version see DCMOD AL-070D datasheet | For the ITE Approved version see EASYMOD AL-070U datasheet.

SPECIFICATIONS

Typical at Nominal Line, Full Load and 25°C Unless Otherwise Noted.

INPUT

Input Voltage Range Options	90-264 VAC
Frequency	47-63Hz
Inrush Current	30A Max (cold start)
Input Current @ 115VAC	1.5A max
Leakage Current	<100µA @ 264VAC
Fusing, dual fuse	Dual 2A / 250VAC

OUTPUT

Output Power	50W Convection / 70W with 15 cfm Airflow
Hold-up Time	16mSec
Efficiency	70% Typical
Adjustment Range (V1 Only)	±5%
Ripple / Noise, max	1% pk-pk max
Line Regulation	Max ±0.2%
Load Regulation @ 60% ±40% Full Load	
V1	±3% max
V2-V3	±5% max
Cross Regulation @ 60% ± 40% Full Load	
V1: Change in V2 - V3	±0.5%
V2 - V3: Change in V1 @75 ±25% F/L	±5% max
Overvoltage Protection (V1 Only)	>125% (Latch Off)
Power Limit	>120% (Auto-Recovery)
Overshoot (all outputs)	10% max
Response Time	500 µSec (25-75% step load)
Switching Frequency	60KHz (typical)

ENVIRONMENTAL

Operating Temp. Range	-20°C to +50°C (Full Load) Consult factory for -40°C Guaranteed Start-Up and Industrial Temperature Range options
Output Current Derating	2.5%/°C, 50°C to 70°C
Storage Temp. Range	-40°C to + 85°C
Humidity	5% to 95%, Non-Condensing
MTBF, Demonstrated	>500,000 Hours
Cooling	15 cfm Airflow for Full Power
Immunity	EN61000-4-2; -3; -4; -5; -6; -8; -11
Altitude	10,000 feet

PHYSICAL SPECIFICATIONS

Case Dimensions	5.00 x 3.00 x 1.00" / 127 x 76.2 X 25.4mm
Weight	0.56 lbs. (0.25 kg.)
Vibration from 10 - 55Hz	1.0G Peak

(3 orthogonal axes @ 1 octave/min, 5 minute dwell @ 4 major resonances)

SAFETY STANDARDS

UL/cUL 60601-1 3rd Ed., EN60601-1 3rd Ed., CB REPORT (IEC 60601-1), CE MARK (LVD)

EMI STANDARDS

FCC Class A & VDE Class A, CISPR 22; EN 55022 Class A (Class B optional, consult factory)

OUTLINE DRAWING

CONNECTOR 1

(MOLEX#09-65-2058 OR EQUIVALENT; MATING CONNECTOR= MOLEX#09-50-3051)

PIN1	GROUND
PIN2	Key
PIN3	NEUTRAL
PIN4	Key
PIN5	LINE

CONNECTOR 2 (single output)


(MOLEX#09-65-2068 OR EQUIVALENT; MATING CONNETOR= MOLEX#09-50-3061)

PIN1	V1
PIN2	V1
PIN3	V1
PIN4	RET
PIN5	RET
PIN6	RET

CONNECTOR 2 (multi-output)

(MOLEX#09-65-2068 OR EQUIVALENT; MATING CONNETOR= MOLEX#09-50-3061)

PIN1	V2
PIN2	V1
PIN3	V1
PIN4	RET
PIN5	RET
PIN6	V3

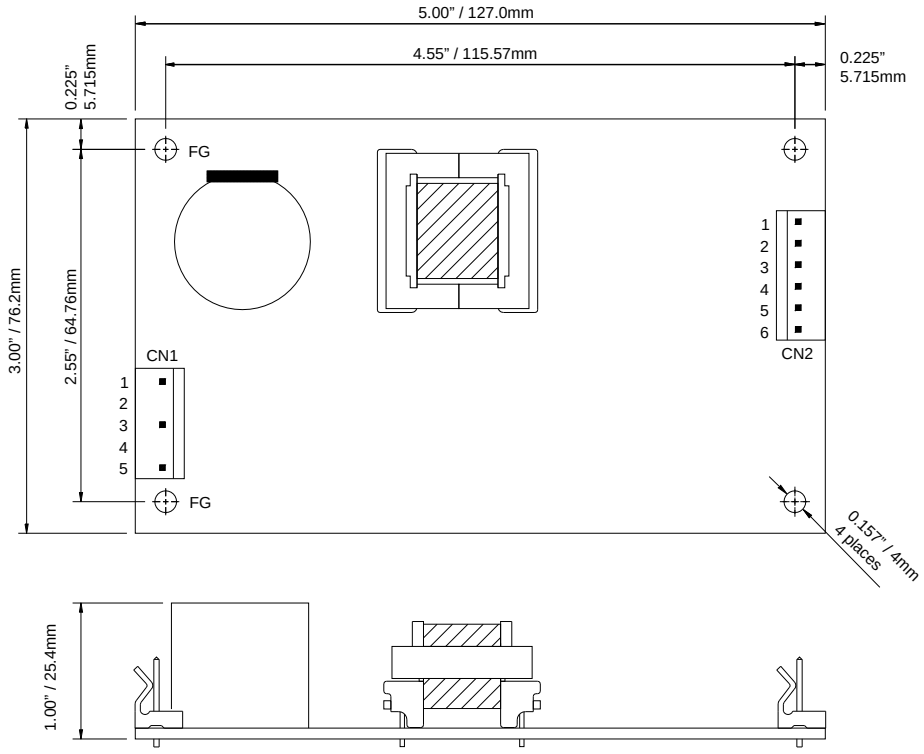

© 2019 UNIPOWER LLC
This document is believed to be correct at time of publication and UNIPOWER LLC accepts no responsibility for consequences from printing errors or inaccuracies. All specifications subject to change without notice.

North America & CALA: +1 954-346-2442 • EMEA: +1 561-990-3830 • sales@unipowerco.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP