

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

DNR-6-1G

HalfRACK™ Ethernet I/O

- Allows the installation of up to 6 I/O boards
- Over 80 different I/O boards available
- Front-loading I/O boards for rapid reconfiguration or repair
- Two independent Gigabit (1000/100/10Base-T) Ethernet Interfaces
- Two, independent IP addresses on separate connectors
- Inter RACK Sync Interface
- Compact : 5.25" x 6.2" x 10.5" (3U) provides 6 I/O slots
- Up to 150 A/D, 288 DIO, 192 D/A, 144 ARINC-429 channels per rack
- Rugged: 3 g Vibration, 100 g Shock, -40 to +70 °C
- Real-time: 1000 I/O scans in < 1 millisecond
- Complete Windows, Linux and RT OS support
- LabVIEW™, MATLAB®, Simulink support and more

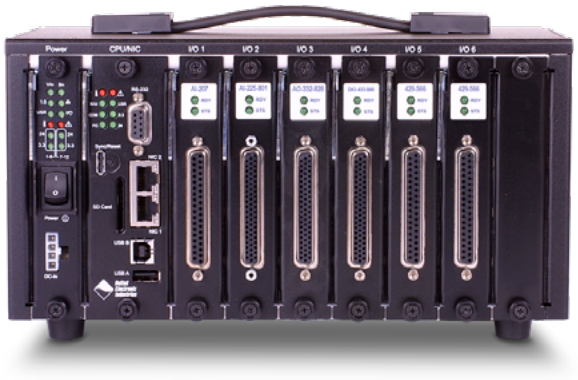


DNR-6-1G includes rack/chassis, Dual channel NIC, CPU, Power Supply, and software. Optional slot covers for empty slots are also available.

General Description:

The DNR-6-1G is a compact (3U), rugged Ethernet I/O rack. Though the backplane electronics are identical to our popular PowerDNA "Cube" series, the RACKtangle DNR series provides two Gigabit Ethernet (100/10 Base-T compatible) interfaces and slots for up to 6 I/O boards. Front-loading slots allow the I/O boards to be quickly and easily installed and removed. These capabilities dramatically increase performance and simplify system reconfiguration when necessary. The backplane within the rack contains no active electronic components, ensuring the rack itself has an almost unlimited MTBF. It also means that all active components are on easily replaceable I/O modules, offering an extremely short MTTR in critical applications.

Controller Block Diagram:

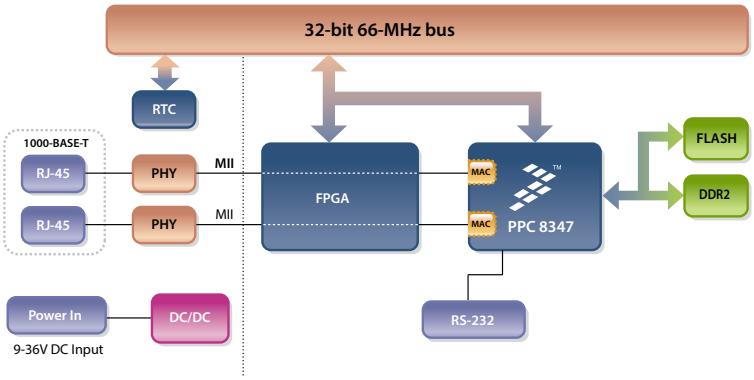

DNR series I/O boards are electronically identical to the DNA boards developed for use in UEI's I/O Cubes. The DNR-6-1G is supported by a rapidly growing complement of I/O boards. The DNR RACKtangle chassis is ideally suited for a wide variety of industrial, aerospace, automotive and laboratory data acquisition and control applications.

The DNR-6-1G provides the 8347 PowerPC CPU, two Ethernet Network Interfaces, indicator lights, timing/trigger interface, configuration ports, backplane buffer and power supply. The bulk of the rack is dedicated to the 6 I/O slots. These slots are populated with I/O modules selected to match your application. With over 30 different I/O boards available, we're sure to have just what your application requires. We currently offer: Analog input boards to measure voltage, current, strain gages, thermocouples and more, Analog output boards with outputs to ±40V or ±50 mA, Digital I/O interfaces for logic and "real-world" signal levels, counters and timers, quadrature encoder inputs, and Communications interfaces for ARINC-429, RS-232/422/485 and the CAN bus.

A variety of Ethernet based communications "modes" provide the interface between the host PC and the DNR rack. Largely transparent to the user and fully compliant with standard Ethernet operation, these communications modes have been optimized for certain application types. The first is simple, single point, programmed I/O. This mode is simple and is suitable for most systems where high speed or precise sample timing are not required. The second mode is the ACB (Advanced Circular Buffer). In ACB mode, data is written to and from buffers on the I/O boards rather than directly to the Ethernet port. ACB mode is preferred for high speed acquisition/control or where precise timing is required, as the buffers are large enough to ensure data is not lost due to Ethernet timing latencies. The third mode, is DMAP. In DMAP mode, cubes use our patented DAQBIOS Ethernet protocol to ensure deterministic real-time performance and achieve sub-millisecond response times across more than 1000 I/O (analog and/or digital) points. Finally, there are two high speed messaging modes that allow real-time performance when transferring data to and from any of the communications I/O boards (e.g. the ARINC-429 or CAN-bus interface).

Software is included, providing a comprehensive, yet easy-to-use API that supports all popular operating systems, including Windows, Linux, and most real-time operating systems—such as QNX, Intime, VXworks, and more. Additionally, the UEIDAQ Framework—an even higher level Windows driver—supplies complete support for those creating applications in many popular Windows programming languages, as well as data acquisition software packages such as LabVIEW and MATLAB/Simulink.

General Description (continued):

The DNR-6 rack offers a wide variety of mounting options. The standard rack is provided with rubber feet which make the DNR-6 ideal for desk or table top applications. A bracket kit allows the cubes to be mounted to a wall or other flat surface or in any standard 19" rack (3U height).

Technical Specifications:

Standard Interfaces	
To Host Computer	Two independent 1000Base-T Gigabit Ethernet ports (100/10Base-T compatible)
Distance from host	100 meters, max
Config/General	RS-232, 9-pin "D"
Sync	Custom cable to sync multiple racks
I/O Slots Available	
DNR-6-1G	6 slots
Data transfer and communications rates	
Ethernet data transfer rate	20 megabytes per second
Analog data transfer rate	up to 6 megasample per sec (16-bit samples)
DMAP I/O mode	update 1000 I/O channels (analog and/or digital) in less than 1 millisecond, guaranteed
Processor	
CPU	Freescale 8347, 400 MHz, 32-bit
Memory	128 MB (not including on-board Flash)
Status LEDs	Power supplies within spec, One second system heart-beat, Attention, Read/Write, Power, Communications Active
Environmental	
Temp (operating)	Tested to -40 °C to 70 °C
Temp (storage)	-40 °C to 85 °C
Humidity	0 to 95%, non-condensing
Vibration	
(IEC 60068-2-64)	3 g, 10-500 Hz, sinusoidal
(IEC 60068-2-6)	3 g, 10-500 Hz, broad band random
Shock	
(IEC 60068-2-27)	100 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations
MTBF	130,000 hours
Physical Dimensions	
DNR-6 series	5.25" x 6.2" x 10.5" (3U in a 19" rack)
Power Requirements	
Voltage	9 - 36 VDC (AC adaptor included)
Fuse	Internal 10 A
Power Dissipation	13 W at 24 VDC (not including I/O boards)
Power Monitoring	
I/O board power	All internal power supplies monitored to ±1% accuracy. All PS voltages may be read by host. LED annunciators indicate out of range
Input current	Monitored by host, LED indicates overcurrent
Input voltage	Monitored by host, LED indicates out of range

DNR Series Advantages:

Easy to Configure and Deploy

- Over 80 different I/O boards available
- Over 5 quadrillion possible configurations
- Gigabit Ethernet based (100/10Base-T compatible)
- Bracket kit for mounting to wall or in 19" racks
- Industrial quality rubber feet for solid table-top mounting
- Passive backplane ensures high MTBF and Low MTTR
- Standard "Off-the-shelf" products and delivery

True Real-time Performance

- 1 msec updates guaranteed with 1000 I/O
- Up to 6 million samples per second
- Use QNX, RTX, RT Linux, RTAI Linux, LabVIEW RT

Flexible Connectivity

- 1000Base-T with Cat-5 cable

Compact Size:

- 5.25" x 6.2" x 10.5"
- 150 analog inputs per rack
- 192 analog outputs per rack
- 288 digital I/O bits per rack
- 48 counter/quadrature channels per rack
- 144 ARINC-429 channels per rack
- 24 RS-232/422/485 ports per rack

Low Power:

- Less than 13 watts per typical rack (not including I/O)
- AC, 9-36 VDC or battery powered.

Stand alone and Data Logger Modes

- Upgradeable to UEISIM 600R
- Upgradeable to UEIPAC 600R
- Upgradeable to UEIModbus 600R

Rugged and Industrial:

- Solid Aluminum construction
- 130,000 hour MTBF
- Operation tested from -40°C to +70°C
- Vibration tested to 3 g, (operating)
- Shock tested to 100 g (operating)
- All I/O isolated from rack and host PC.

Outstanding Software Support

- Windows, Linux, RTX VXworks and QNX operating systems
- VB, VB .NET, C, C#, C++, J#
- MATLAB, LabVIEW, OPC, ActiveX support

DNR Layout:

Protected On/Off Switch

The On/off switch is mounted within two metal shields which ensure

Power Supply Module

Power-In, 9-36V DC either from the DNA-PSU-24-100 (included with the rack), a user-supplied source, or daisychained from another DNR rack. All power supplies are monitored. Power supply status is supplied

CPU and NIC Module


The DNR series controller and NIC interface are provided in the center slot. This configuration maximizes system noise immunity by reducing the maximum distance an I/O board may be from the CPU. In addition to providing the CPU, this module provides the two Network/Ethernet

Dual Retention Thumb Screws

Dual retention thumb screws ensure the DNR modules remain in their intended positions. A simple module ejector tab allows users to easily

Passive Backplane

The backplane of the DNR rack contains no active components. This means the DNR chassis itself offers an almost unlimited MTBF. All active components in a DNR system (except cooling fans) are on easily replaced boards.

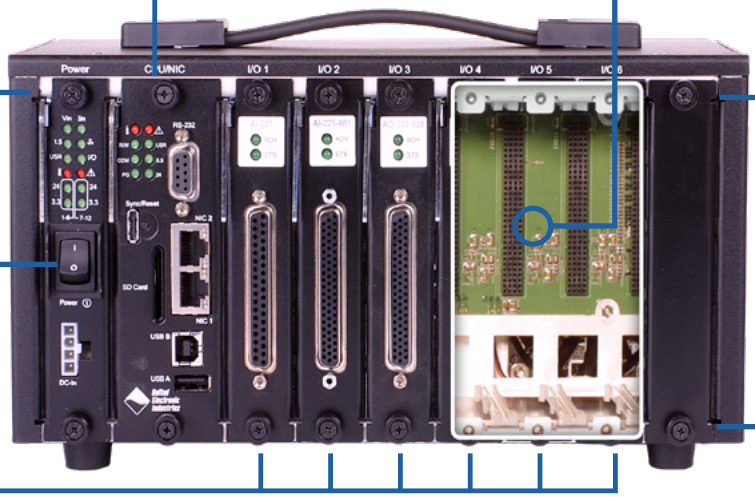


I/O Slots

The DNR rack provides 6 I/O slots. All combinations of DNR-series I/O boards are allowed offering over literally trillions of possible configurations. DNR series I/O boards are fully plug-and-play. There is no hardware configuration required. It is recommend that empty slots be covered with blank panels (part number DNR-IO-FILLER available separately) to maintain air flow, reduce EMI, and protect the system from dust accumulation. Your signals may be connected directly to the I/O boards via your custom cabling or take advantage of our wide variety of easy-to-use, external screw terminal panels.

Power Supply Annunciator LEDs

Spec	ON / OFF
Vin:	OK / Error
1.5V	OK / Error
User controlled, default is off	
Temp:	Over / OK
24 V*:	OK / Error
3.3 V*	OK / Error
*24 V & 3.3 V for slots 1-3	

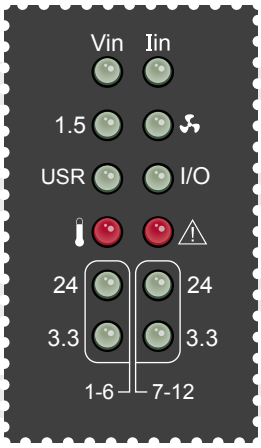


Spec:	ON / OFF
Input I:	OK / Overcurrent
Fans:	On / Off
One flash per second heartbeat	
System:	Error / OK
24 V**:	OK / Error
3.3 V**	OK / Error
**24 V & 3.3 V for slots 4-6	

CPU/NIC Pinouts:

Power In[1] (molex)

1	+VIN
2	GND
3	GND
4	+VIN

Serial (RS-232)



TXD	2	7
RXD	3	8
	4	9
GND	5	

Synchronization

1	+5 V
2	+5 V
3	Gnd
4	Sync Out 2
5	Gnd
6	Sync In 2
7	Gnd
8	Sync Out 1
9	Gnd
10	Sync In 1

[1]Mating connector available from Digikey, Molex PN 39-01-4040

[3]Internal pull-up, start/stop trigger should connect SYNC_IN with SYNC_GND

United Electronic Industries, Inc.
Tel: **(508) 921-4600**
http://www.ueidaq.com
Fax: **(508) 668-2350**

CPU and NIC Interface

Status LEDs

These LED indicators display the status of a variety of internally monitored parameters including: Internal temperature, system self-test status, bus activity, as well as providing indication that required CPU/NIC power supply voltages are within specifications. A user controllable USR LED can be controlled by the application program and by

Sync Connector

High-speed Cube-to-Cube synchronization connector. This connector allows triggers or clocks to be shared among racks. Two racks may be connected together directly or larger systems may take advantage of the DNA-SYNC



Serial Port

The serial port is used primarily for system setup and configuration. The rack may be configured from any serial terminal running at 57,600 baud/8 data bits/no parity/1 stop bit. From a terminal program you can, for instance, change the IP address from the default, if necessary. You also download updated firmware through the serial port. The serial port is usable for RS-232 communications. For users without a


Reset Button

Recessed to prevent accidental activation, this button resets the CPU layer for activities such as downloading and installing new firmware for the DNR rack. It may also be used to start/stop logging when the rack is configured as a UEILogger 600R.

Network Connectors

Each NIC interface includes two independent Gigabit Ethernet ports. The 1000/100/10Base-T interface allows the rack to be installed up to 100 Meters from your host PC. A 100-Base FX fiber optic interface is available as an option and allows the rack to be mounted up to 2 km from the host using multi-

Software Support

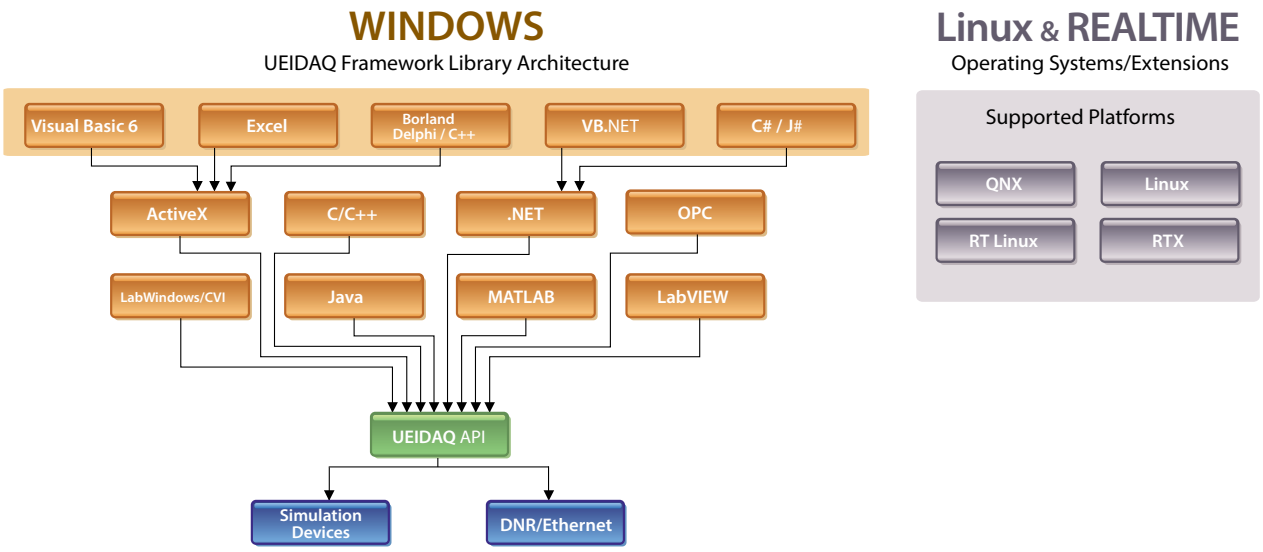

Ordering Guide:

Part Number	Description
DNR Racks (includes UEIDAQ Framework software, universal AC power supply, serial and Ethernet cables)	
DNR-6-1G	6 slot, 3U, 1000Base-T based DNR series Gigabit Ethernet-based DAQ and Control rack
DNR-6 19IN BRKT	HalfRACK mounting bracket
DNR-IO-FILLER	Optional (but recommended) I/O slot fillers to cover unused slots
Extended Warranty	Option to purchase UEI's extended 3-5 year warranty is available

Specifications subject to change without notice

United Electronic Industries, Inc.
Tel: **(508) 921-4600**
http://www.ueidaq.com
Fax: **(508) 668-2350**

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP