

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*


DNx-DIO-432-800

32-Channel current sinking (600mA) digital output board with current monitoring + low leakage current

- 32 digital outputs
- 600 mA (current sink) outputs
- Wide 3.3 to 36 VDC output range
- 1 kHz maximum update rate
- Low leakage outputs suitable for controlling LED indicators viewed by night vision devices

Guardian Series Diagnostics

- Monitors output current
- Programmable current limit
- PWM "soft-start" outputs

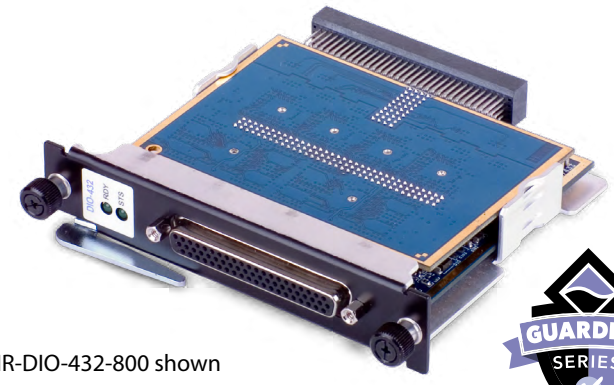

DNR-DIO-432-800 shown

BENEFITS OF UEI'S GUARDIAN SERIES

✓	CIRCUIT BREAKER
✓	CURRENT MONITORING

UEI's Guardian series boards include a sophisticated, reliable on-board monitoring system, allowing quick and easy system testing, sensor diagnostics monitoring and fault detection for rapid resolution in field or lab.

Learn more about UEI's Guardian series

The DNx-DIO-432-800 is a 32 channel, digital output layer designed for use in a wide variety of applications. Each channel is configured as a current sink (see diagram on the following page) and switches voltages between 3.3 and 36 VDC. Each channel is rated for continuous operation at 600 mA with an output voltage of less than 550 mV.

The DNx-DIO-432-800 is part of UEI's Guardian series. It not only controls the digital outputs, it provides a unique output monitoring capability. An on-board 24-bit A/D converter monitors each channel's output current. This allows the application to detect and flag short and open circuits as well as other "suspicious" behavior. The monitoring capability is also powerful diagnostic tool allowing a repair technician to quickly and accurately identify blown or miswired channels.

One of the important features of the DNx-DIO-432-800 is the board's extremely low leakage current in the OFF state. With less than 1 microamp of leakage current, the board is an ideal alternative to applications which had previously relied upon electromechanical contacts.

The Guardian advantage includes programmable overcurrent protection. The user may select the current and duration of overload (as short as 10 mS) required before the channel is shut down. Each board provides 350 Vrms isolation between the I/O, the cube and other installed I/O layers. The DNx-DIO-432-800 offers update rates up to 1 kHz and simplifies software writes by transferring all data in a single, 32-bit word.

Each channel offers a pulse-width-modulated (PWM) "soft-start/stop" capability. This allows power to be applied/removed gradually, greatly increasing the reliability of devices like incandescent bulbs where thermal shock reduces life expectancy. The PWM may also be configured to provide a steady state output at less than 100% allowing the unit to function as a programmable "dimmer".

Software is included, providing a comprehensive, yet easy-to-use API that supports all popular operating systems, including Windows, Linux, and mostreal-time operating systems—such as QNX, Intime, VXworks, and more. Additionally, the UEIDAQ Framework—an even higher level Windows driver—supplies complete support for those creating applications in many popular Windows programming languages, as well as data acquisition software packages such as LabVIEW and MATLAB/Simulink.


Technical Specifications:

Number of channels	32 digital outputs
Output configuration	Current sink
Output port configuration	Single 32-bit word
Output Drive	600 mA per channel continuous; 3.5 A peak (100 mS max)
Output ON voltage	< 550 mV @ 600 mA (including standard 3' cable)
Output ON impedance	< 0.9 Ohm (including standard 3' cable)
Output OFF impedance	> 30 MΩ
Output OFF leakage	< 1 µA
Overvoltage protection	±40 VDC (reverse current must be limited to 500 mA to prevent damage)
Overcurrent protection Current Limit Overload response time	 50 mA - 2 A 10-5000 ms (user programmable)
Output Monitoring Configuration Current Accuracy	 Multiplexed ±1 mA, max (sampled at 10 Hz)
Soft-Start/Stop duration	256 µS to 5 seconds
Steady State PWM output	0 to 100% in 0.4% increments
Output Throughput Rate	1 kHz max
Power up / reboot state	Off
Power dissipation	<2.5 W, not including power dissipated in the output FETs
Isolation	350 Vrms
Operating Temp. Range	Tested -40 to +85 °C
Operating Humidity	95%, non-condensing
Vibration *IEC 60068-2-6* *IEC 60068-2-64*	5 g, 10-500 Hz, sinusoidal 5 g (rms), 10-500 Hz, broad-band random
Shock *IEC 60068-2-27*	100 g, 3 ms half sine, 18 shocks @ 6 orientations 30 g, 11 ms half sine, 18 shocks @ 6 orientations
Altitude	120,000 ft
MTBF	260,000 hours

Connection Schemes:


Screw Terminal Panel	Matching Cable	Description
DNA-STP-62	DNA-CBL-62	Connects all I/O signals to easy to use screw terminals

Block Diagram:

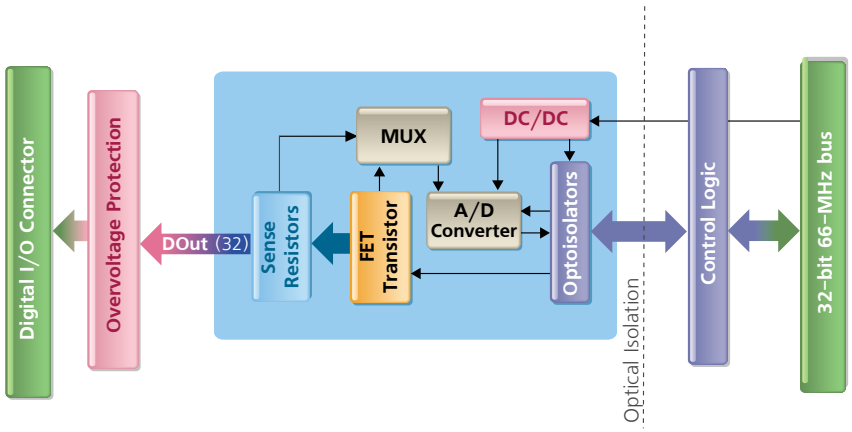


Single Channel Diagram:

Simplified Output Channel Diagram

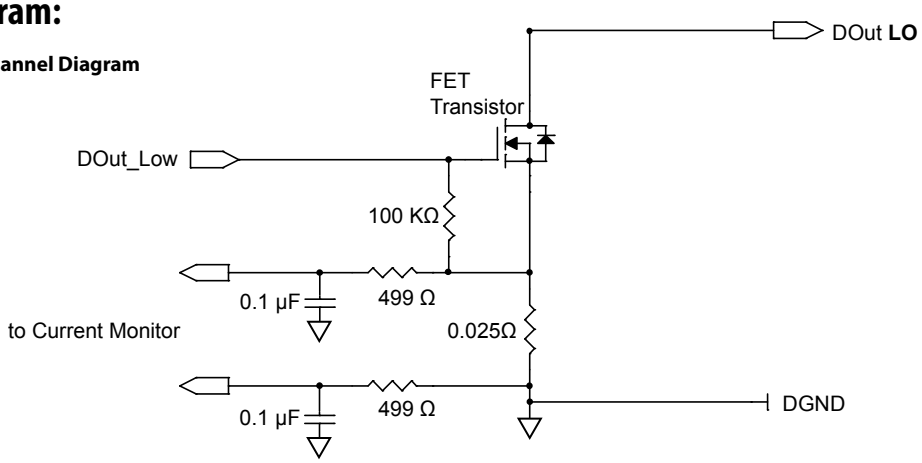

Pinout Diagram:

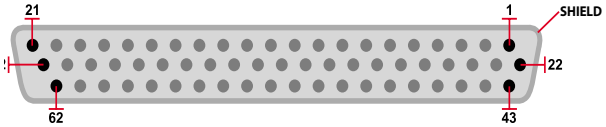

Note: For rated performance all ground pins should be connected to the external ground.

Pin	Signal	Pin	Signal	Pin	Signal
1	Gnd	22	Gnd	43	Gnd
2	Gnd	23	Gnd	44	Gnd
3	DO 1	24	DO 0	45	DO 2
4	DO 4	25	DO 3	46	DO 5
5	Gnd	26	Gnd	47	Gnd
6	DO 7	27	DO 6	48	DO 8
7	DO 10	28	DO 9	49	DO 11
8	Gnd	29	Gnd	50	Gnd
9	DO 13	30	DO 12	51	DO 14
10	DO 16	31	DO 15	52	DO 17
11	Gnd	32	Gnd	53	Gnd
12	DO 19	33	DO 18	54	DO 20
13	DO 22	34	DO 21	55	DO 23
14	Gnd	35	Gnd	56	Gnd
15	DO 25	36	DO 24	57	Rsvd
16	DO 27	37	DO 26	58	Rsvd
17	Gnd	38	Gnd	59	Rsvd
18	DO 29	39	DO 28	60	Rsvd
19	DO 31	40	DO 30	61	Rsvd
20	Gnd	41	Gnd	62	Gnd
21	Gnd	42	Gnd		

Ordering Guide:

Part #	Description
DNX-DIO-432-800	32-Channel current sinking (600mA) digital output board with current monitoring + low leakage current
DNA-STP-62	62-channel screw terminal panel
DNA-CBL-62	2.5ft, 62-way round shielded cable
DNA-STP-3762	Universal Screw Terminal Panel for DNx-Series I/O
Extended Warranty	Option to purchase UEI's extended warranty (up to 10 years) is available

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP