ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *United Electronic Industries PD2-DIO-64TS* at our website: *Click HERE*

PD2-DIO

PowerDAQ 2 PCI Digital I/O Boards

- 64 or 128 lines (5V/TTL) of I/O in 16-bit ports
- Generate interrupts on any line
- Four separate high-speed IRQ lines (100 ns)
- Custom logic chip replaces obsolete 8255 and equivalents
- Ideal for solid-state relays
- User-defined power-up state in 16-bit groups (High, Low, Tri-stated)
- Two Enhanced Synchronous Serial Interfaces (ESSIs) for high-speed devices such as codecs
- Onboard 16-bit FIFO: 2k samples
- Three 24-bit counter/timers
- Port-scan list
- High-speed pattern generation and digital streaming
- High-speed event counts streaming (2 Mwords/s)
- Start/stop external trigger line

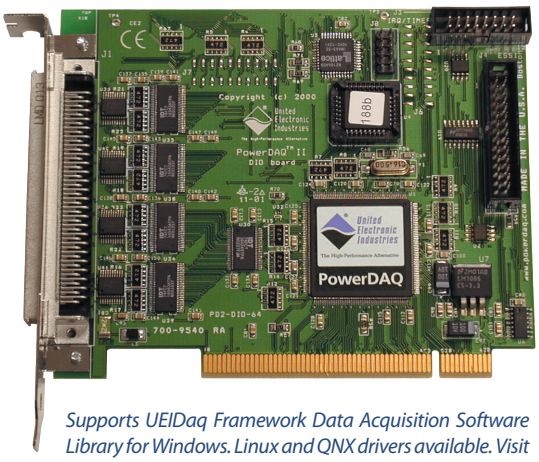

Supports UEIDaq Framework Data Acquisition Software Library for Windows. Linux and QNX drivers available. Visit our website for more details.

General Description


For applications that involve a high number of digital I/O lines, UEI offers four models in the PD2-DIO family with either 64 or 128 I/O lines. Instead of following the industry trend of implementing discrete I/O with cumbersome and limiting 8255-type devices, we work with 16-bit line drivers under control of a DSP and custom logic.

As a result, you no longer need to create external circuitry to guarantee power-on startup states; our software allows you to configure startup states in groups of 16-bit ports. You no longer need to design separate interrupt circuitry; our hardware comes with four high-speed interrupts waiting for you to use. The digital I/O lines are protected against electrostatic discharge and automatically detect shorts on power up.

Besides digital I/O, the board features three 24-bit counter/timers as well as two high-speed ESSI (Enhanced Synchronous Serial Interface) ports. The onboard DSP and optimized PCI-bus interface also allow the card to optionally stream digital data to or from disk at rates as high as 2 Mbytes/s and count events up to 16.5 MHz

Distribution panels make all the board's I/O capabilities available for field connection. Further, an optional accessory (PD2-DIO-CONN64-4) distributes 64 of the digital I/O points into four sets of 16 lines through industry-standard 50-pin IDC connectors. They, in turn, attach directly to relay panels available from UEI and many other sources.

Block Diagram:

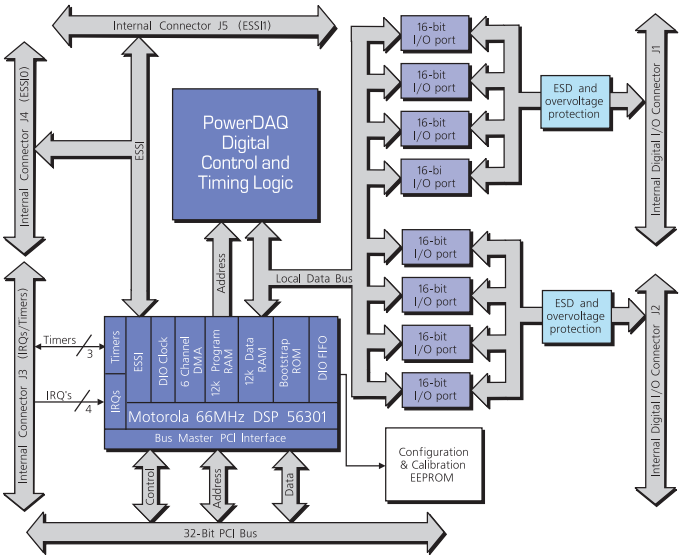

Technical Specifications:

DC Electrical Characteristics Over Operating Range		
Input High Level	Guaranteed logic High level	2.0V min
Input Low Level	Guaranteed logic Low level	0.8V max
Input High Current	V_I = 5V	±1 µA max
Input Low Current	V_I = Gnd	±1 µA max
3-State Output Current	V_O = 2.7V	±1 µA max
3-State Output Current	V_O = 0.5V	±1 µA max
Short-Circuit Current	V_O = Gnd (momentary)	-80 mA min -140 mA typ -250 mA max
Input Hysteresis		100 mV typ

Output Drive Characteristics		
Output Drive Current	V_O = 2.5 V	-32 mA per pin -180 mA per port
Output High Voltage	I_{OH} = -3 mA	3.5V typ, 4.8V max
Output High Voltage	I_{OH} = -15 mA	3.5V typ, 4.7V max
Output High Voltage	I_{OH} = -32 mA	2.4V min, 3.0V typ
Output High Voltage	I_{OL} = 64 mA	0.2V typ, 0.55V max
I/O Power Off Leakage	$V_{I/O} \leq$ 4.5V	±1 µA max


Counter /Timer	
Prescaler	1 (21-bit)
Number of Channels	3
Resolution	24 bits
Maximum Frequency	16.5M S/s for external clock and 33M S/s for internal DSP clock
Minimum Frequency	0.0000002 S/s for internal clock, no low limit for external clock
Minimum Pulse Width	20 ns
Output High Level	2.0V min @ -4 mA
Output Low Level	0.5V max @ 4 mA
Input High range	from 11V to level of input supply voltage
Protection	7 kV ESD, ±30V overshoot/undershoot
Input Low Voltage	0.0-0.8V
Input High Voltage	2.0-5.0V

ESSI Characteristics


The Motorola 56301 DSP contains two fast Enhanced Synchronous Serial Interfaces. The PowerDAQ DIO board allows access to both. Each ESSI port contains three transmitters and one receiver and has a maximum operational speed of 15M bits/sec.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Pinout Diagrams:

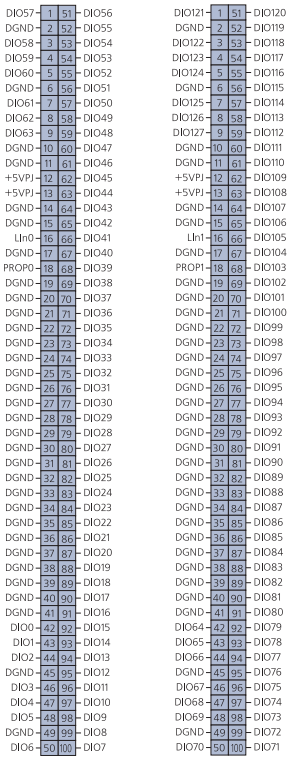


PowerDAQ PD2-DIO
Digital I/O Connectors (J1, J2)



PowerDAQ PD2-DIO
Counter/Timers/IRQ Lines Male Connector (J3)



PowerDAQ PD2-DIO
ESSI Male Connector (J4)



PowerDAQ PD2-DIO
ESSI Male Connector (J5)

Ordering Information:

Part Number	Description
PD2-DIO-64	64 digital I/O channels, 3 counter/timers, 2 ESSI ports, 4 high-speed IRQ lines (100 ns)
PD2-DIO-128	128 digital I/O channels, 3 counter/timers, 2 ESSI ports, 4 high-speed IRQ lines (100 ns)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP