ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Vishay VSKT162/12PBF* at our website: ***Click HERE***

Thyristor/Diode and Thyristor/Thyristor, 135 A to 160 A (New INT-A-PAK Power Modules)



New INT-A-PAK

FEATURES

- High voltage
- Electrically isolated by DBC ceramic (Al_2O_3)
- 3500 V_{RMS} isolating voltage
- Industrial standard package
- High surge capability
- Glass passivated chips
- Modules uses high voltage power thyristor/diodes in three basic configurations
- Simple mounting
- UL approved file E78996
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for multiple level

Pb-free
RoHS COMPLIANT

APPLICATIONS

- DC motor control and drives
- Battery charges
- Welders
- Power converters
- Lighting control
- Heat and temperature control

PRODUCT SUMMARY	
$I_{T(AV)}$	135 A to 160 A

MAJOR RATINGS AND CHARACTERISTICS					
SYMBOL	CHARACTERISTICS	VSK.136..	VSK.142..	VSK.162..	UNITS
$I_{T(AV)}$	85 °C	135	140	160	A
$I_{T(RMS)}$		300	310	355	A
I_{TSM}	50 Hz	3200	4500	4870	A
	60 Hz	3360	4712	5100	A
I^2t	50 Hz	51.5	102	119	kA^2s
	60 Hz	47	92.5	108	kA^2s
$I^2\sqrt{t}$		515.5	1013	1190	$kA^2\sqrt{s}$
V_{RRM}	Range	400 to 1600			V
T_J	Range	- 40 to 125			°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V_{RRM}/V_{DRM}, MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM}/V_{DSM}, MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM}/I_{DRM} AT 125 °C mA
VSK.136 VSK.142 VSK.162	04	400	500	50
	08	800	900	
	12	1200	1300	
	14	1400	1500	
	16	1600	1700	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FORWARD CONDUCTION

PARAMETER	SYMBOL	TEST CONDITIONS			VSK.136	VSK.142	VSK.162	UNITS
Maximum average on-state current at case temperature	$I_{T(AV)}$	180° conduction, half sine wave			135	140	160	A
					85	85	85	°C
Maximum RMS on-state current	$I_{T(RMS)}$	As AC switch			300	310	355	A
Maximum peak, one-cycle on-state, non-repetitive surge current	I_{TSM}	t = 10 ms	No voltage reapplied	Sine half wave, initial T_J = T_J maximum	3200	4500	4870	
		t = 8.3 ms			3360	4712	5100	
		t = 10 ms	100 % V_{RRM} reapplied		2700	3785	4100	
		t = 8.3 ms			2800	3963	4300	
Maximum I^2t for fusing	I^2t	t = 10 ms	No voltage reapplied		51.5	102	119	kA^2s
		t = 8.3 ms			47	92.5	108	
		t = 10 ms	100 % V_{RRM} reapplied		36.5	71.6	84	
		t = 8.3 ms			33.3	65.4	76.7	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 ms to 10 ms, no voltage reapplied			515.5	1013	1190	$kA^2\sqrt{s}$
Low level value of threshold voltage	$V_{T(TO)1}$	(16.7 % x π x $I_{T(AV)}$ < I < π x $I_{T(AV)}$), T_J maximum			0.86	0.83	0.8	V
High level value of threshold voltage	$V_{T(TO)2}$	(I > π x $I_{T(AV)}$), T_J maximum			1.05	1	0.98	
Low level value on-state slope resistance	r_{t1}	(16.7 % x π x $I_{T(AV)}$ < I < π x $I_{T(AV)}$), T_J maximum			2.02	1.78	1.67	mΩ
High level value on-state slope resistance	r_{t2}	(I > π x $I_{T(AV)}$), T_J maximum			1.65	1.43	1.38	
Maximum on-state voltage drop	V_{TM}	I_{TM} = π x $I_{T(AV)}$, T_J = 25 °C, 180° conduction			1.57	1.55	1.54	V
Maximum forward voltage drop	V_{FM}	I_{TM} = π x $I_{T(AV)}$, T_J = 25 °C, 180° conduction			1.57	1.55	1.54	V
Maximum holding current	I_H	Anode supply = 6 V initial I_T = 30 A, T_J = 25 °C			200			mA
Maximum latching current	I_L	Anode supply = 6 V resistive load = 1 Ω Gate pulse: 10 V, 100 µs, T_J = 25 °C			400			

SWITCHING

PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS
Typical delay time	t_{gd}	T_J = 25 °C	Gate current = 1 A, dI_g/dt = 1 A/µs V_d = 0.67 % V_{DRM}	1	µs
Typical rise time	t_{gr}			2	
Typical turn-off time	t_q	I_{TM} = 300 A, - dI/dt = 15 A/µs; T_J = T_J maximum V_R = 50 V; dV/dt = 20 V/µs; gate 0 V, 100 Ω		50 to 200	

BLOCKING

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse and off-state leakage current	I_{RRM}, I_{DRM}	T_J = 125 °C	50	mA
RMS insulation voltage	V_{INS}	50 Hz, circuit to base, all terminals shorted, t = 1 s	3500	V
Critical rate of rise of off-state voltage	dV/dt	T_J = T_J maximum, exponential to 67 % rated V_{DRM}	1000	V/µs

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TRIGGERING					
PARAMETER	**SYMBOL**	**TEST CONDITIONS**		**VALUES**	**UNITS**
Maximum peak gate power	P_{GM}	$t_p \le 5$ ms, $T_J = T_J$ maximum		12	W
Maximum average gate power	$P_{G(AV)}$	f = 50 Hz, $T_J = T_J$ maximum		3	
Maximum peak gate current	I_{GM}	$t_p \le 5$ ms, $T_J = T_J$ maximum		3	A
Maximum peak negative gate voltage	$-V_{GT}$			10	V
Maximum required DC gate voltage to trigger	V_{GT}	T_J = - 40 °C	Anode supply = 6 V, resistive load; R_a = 1 Ω	4	
		T_J = 25 °C		2.5	
		$T_J = T_J$ maximum		1.7	
Maximum required DC gate current to trigger	I_{GT}	T_J = - 40 °C		270	mA
		T_J = 25 °C		150	
		$T_J = T_J$ maximum		80	
Maximum gate voltage that will not trigger	V_{GD}	$T_J = T_J$ maximum, rated V_{DRM} applied		0.3	V
Maximum gate current that will not trigger	I_{GD}			10	mA
Maximum rate of rise of turned-on current	dI/dt	$T_J = T_J$ maximum, I_{TM} = 400 A rated V_{DRM} applied		300	A/µs

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	**SYMBOL**	**TEST CONDITIONS**	**VALUES**		**UNITS**
Maximum junction operating temperature range	T_J		- 40 to 125		°C
Maximum storage temperature range	T_{Stg}		- 40 to 150		
Maximum thermal resistance, junction to case per junction	R_{thJC}	DC operation	0.18	0.16	K/W
Maximum thermal resistance, case to heatsink per module	R_{thCS}	Mounting surface, smooth, flat and greased	0.05		
Mounting torque ± 10 % — IAP to heatsink		A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.	4 to 6		Nm
Mounting torque ± 10 % — busbar to IAP					
Approximate weight			200		g
			7.1		oz.
Case style			New INT-A-PAK		

ΔR CONDUCTION PER JUNCTION											
DEVICES	**SINUSOIDAL CONDUCTION AT T_J MAXIMUM**					**RECTANGULAR CONDUCTION AT T_J MAXIMUM**					**UNITS**
	180°	**120°**	**90°**	**60°**	**30°**	**180°**	**120°**	**90°**	**60°**	**30°**	
VSK.136	0.007	0.01	0.013	0.0155	0.017	0.009	0.012	0.014	0.015	0.017	K/W
VSK.142	0.0019	0.0019	0.0020	0.0020	0.0021	0.0018	0.0022	0.0023	0.0023	0.0020	
VSK.162	0.0030	0.0031	0.0032	0.0033	0.0034	0.0029	0.0036	0.0039	0.0041	0.0040	

Note

- Table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

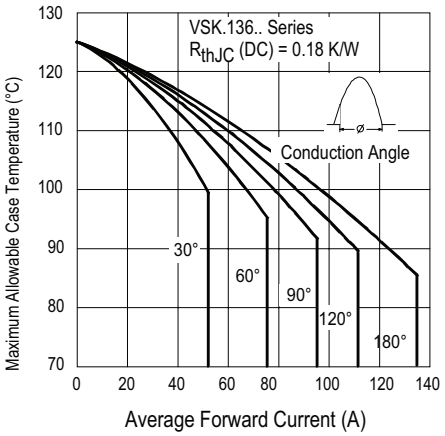


Fig. 1 - Current Ratings Characteristics

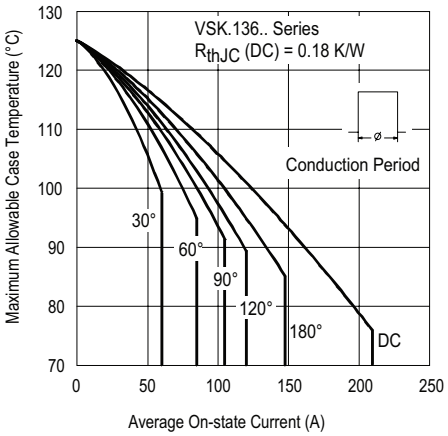


Fig. 2 - Current Ratings Characteristics

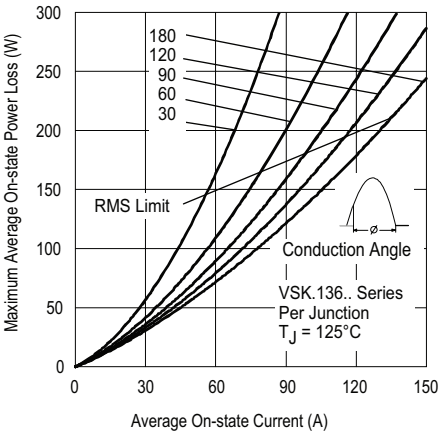


Fig. 3 - On-State Power Loss Characteristics

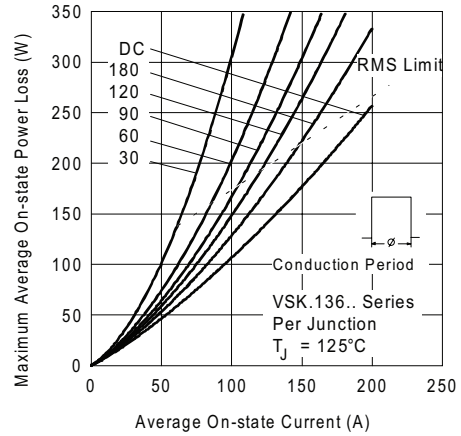


Fig. 4 - On-State Power Loss Characteristics

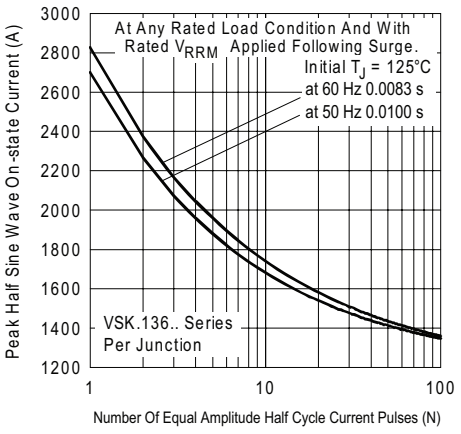


Fig. 5 - Maximum Non-Repetitive Surge Current

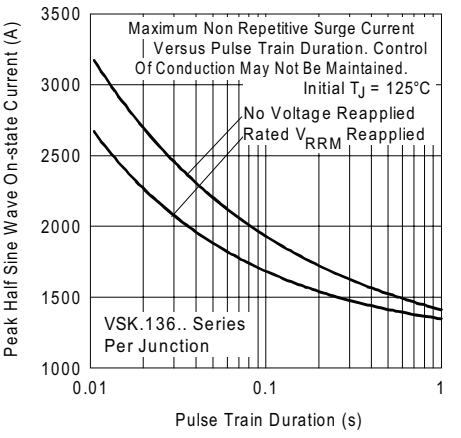


Fig. 6 - Maximum Non-Repetitive Surge Current

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

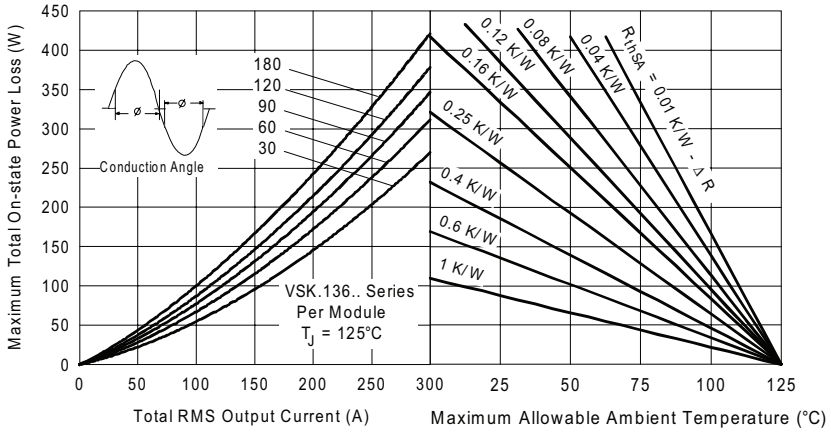


Fig. 7 - On-State Power Loss Characteristics

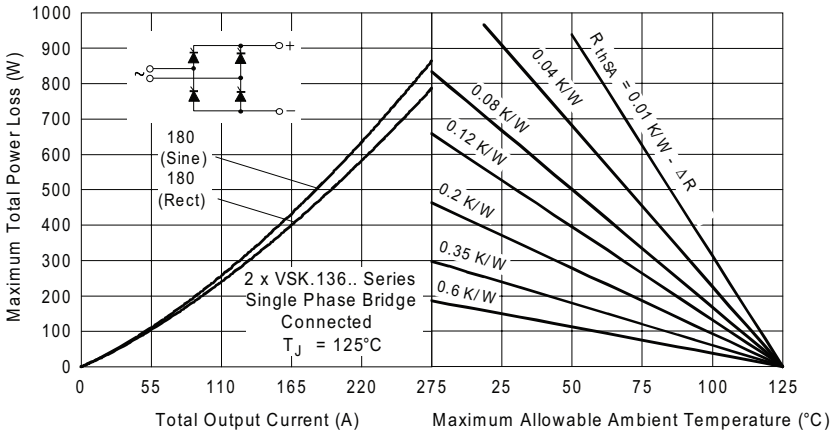


Fig. 8 - On-State Power Loss Characteristics

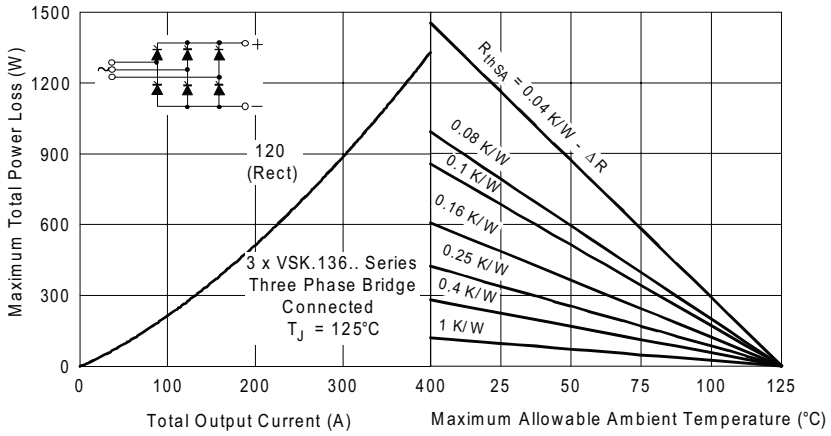


Fig. 9 - On-State Power Loss Characteristics

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

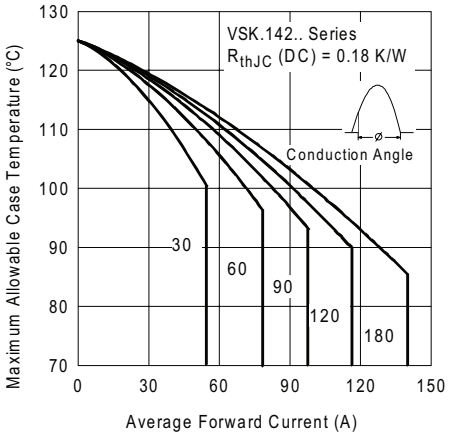


Fig. 10 - Current Ratings Characteristics

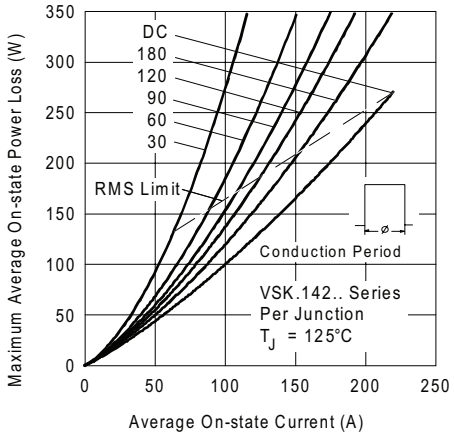


Fig. 13 - On-State Power Loss Characteristics

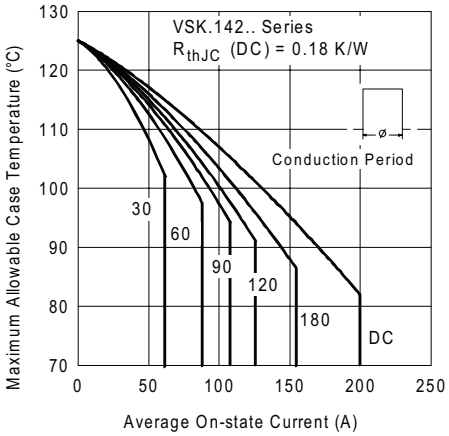


Fig. 11 - Current Ratings Characteristics

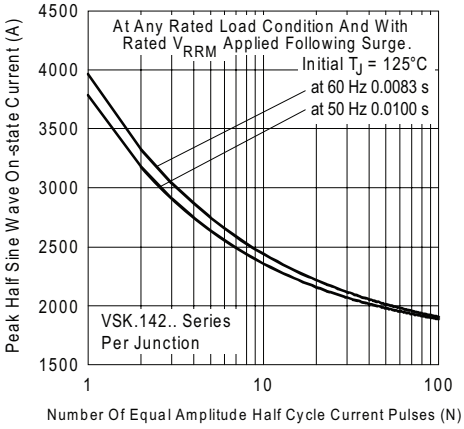


Fig. 14 - Maximum Non-Repetitive Surge Current

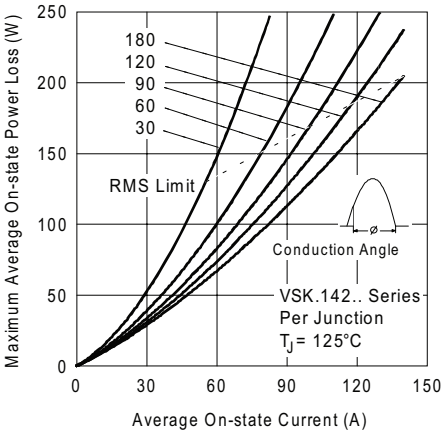


Fig. 12 - On-State Power Loss Characteristics

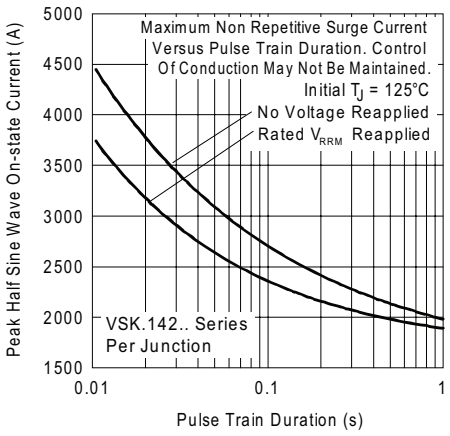


Fig. 15 - Maximum Non-Repetitive Surge Current

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

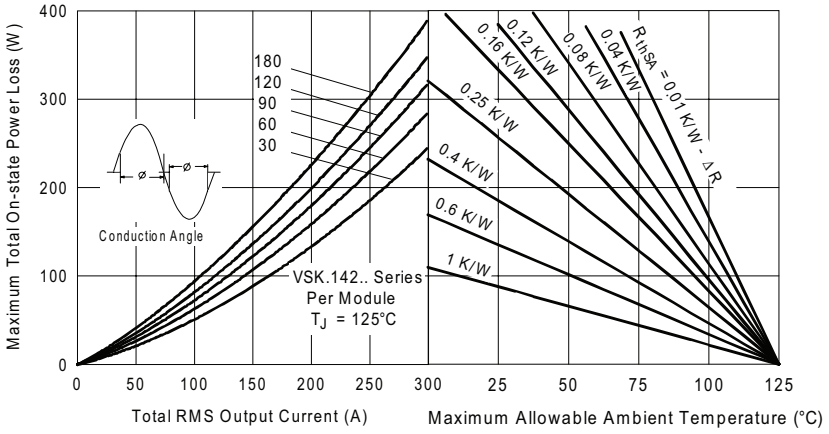


Fig. 16 - On-State Power Loss Characteristics

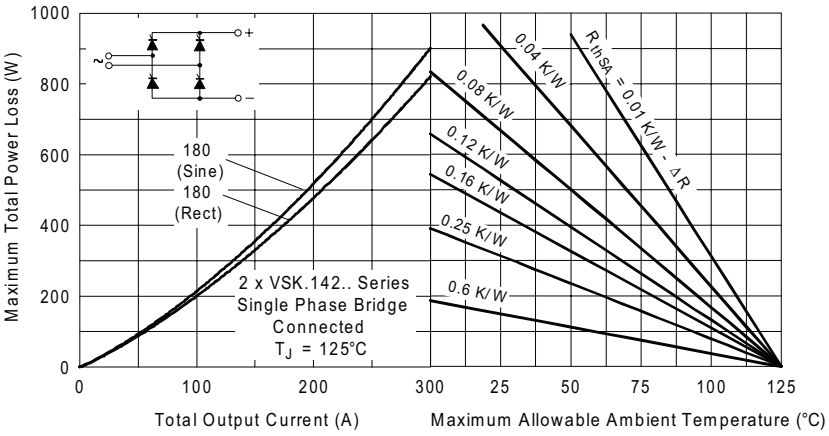


Fig. 17 - On-State Power Loss Characteristics

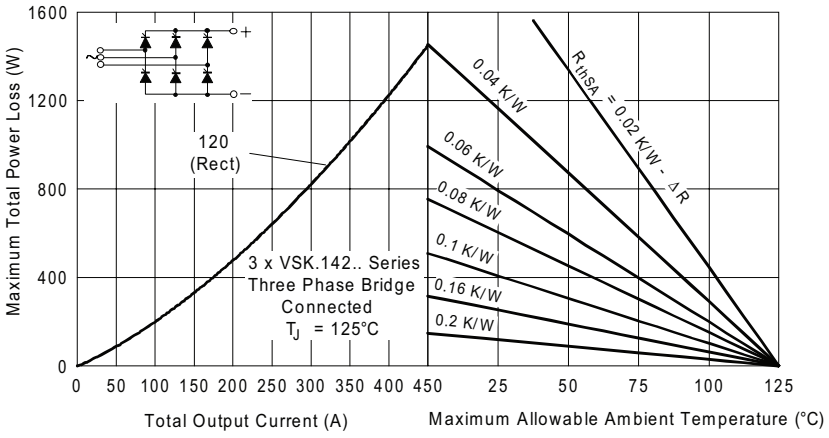


Fig. 18 - On-State Power Loss Characteristics

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

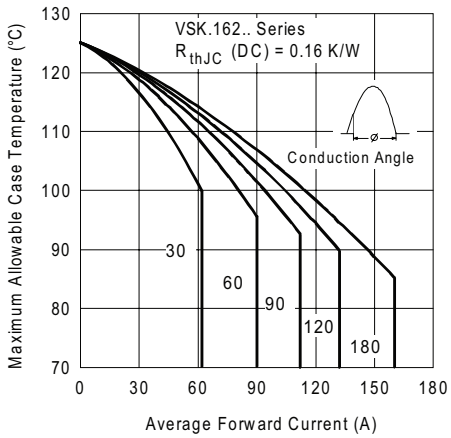


Fig. 19 - Current Ratings Characteristics

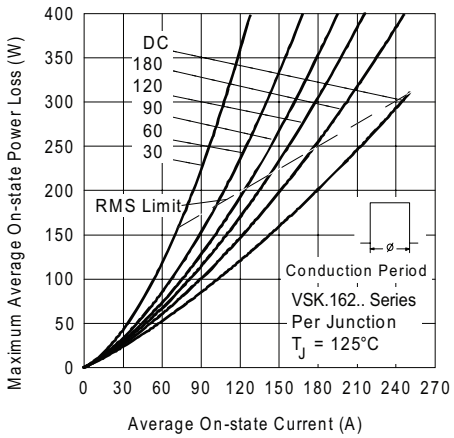


Fig. 22 - On-State Power Loss Characteristics

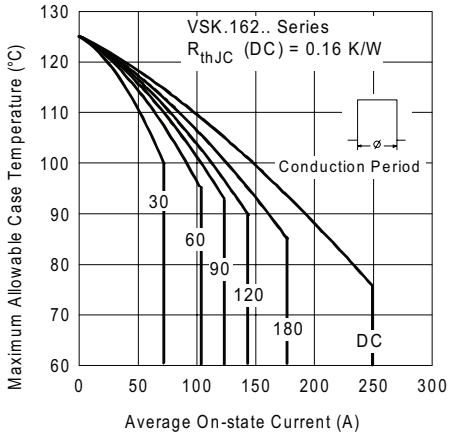


Fig. 20 - Current Ratings Characteristics

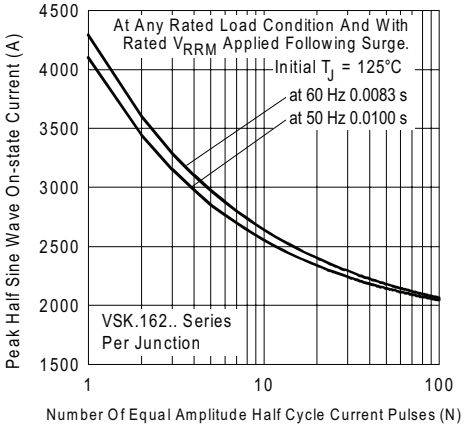


Fig. 23 - Maximum Non-Repetitive Surge Current

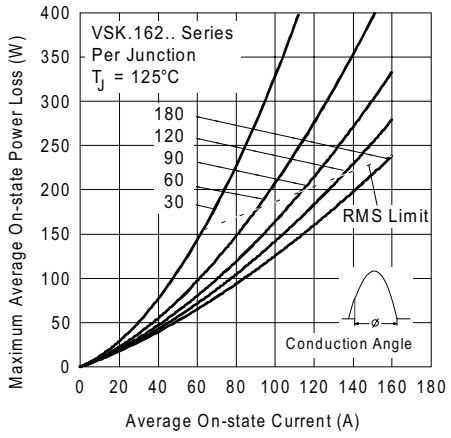


Fig. 21 - On-State Power Loss Characteristics

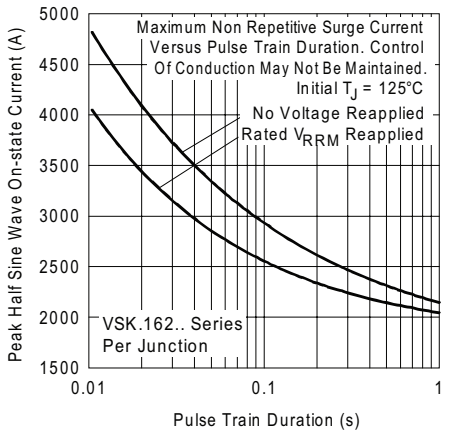


Fig. 24 - Maximum Non-Repetitive Surge Current

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

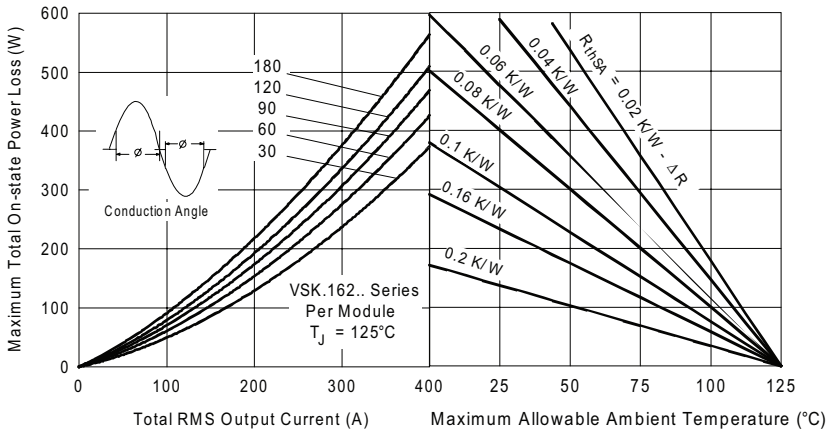


Fig. 25 - On-State Power Loss Characteristics

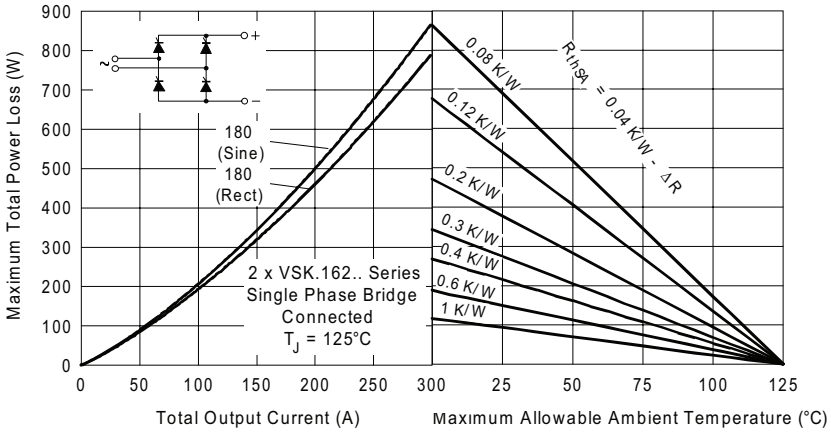


Fig. 26 - On-State Power Loss Characteristics

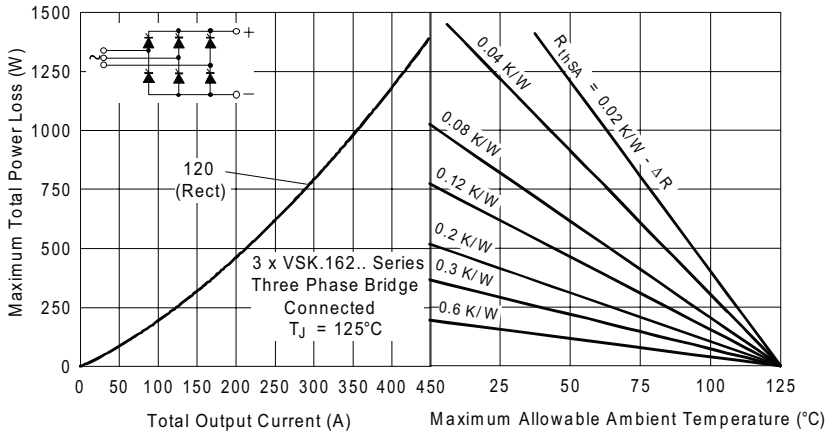


Fig. 27 - On-State Power Loss Characteristics

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

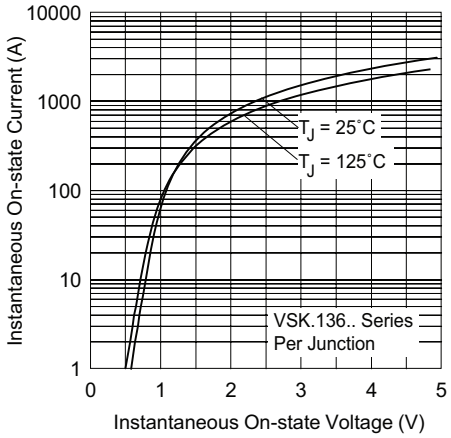


Fig. 28 - On-State Voltage Drop Characteristics

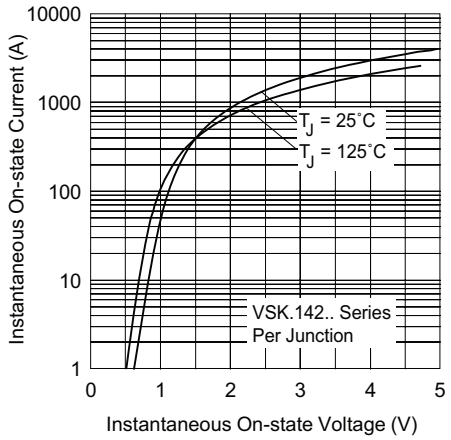


Fig. 29 - On-State Voltage Drop Characteristics

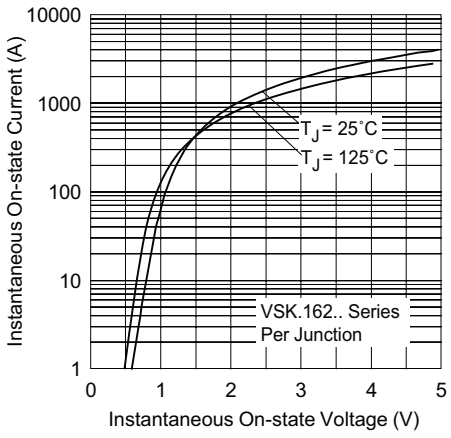


Fig. 30 - On-State Voltage Drop Characteristics

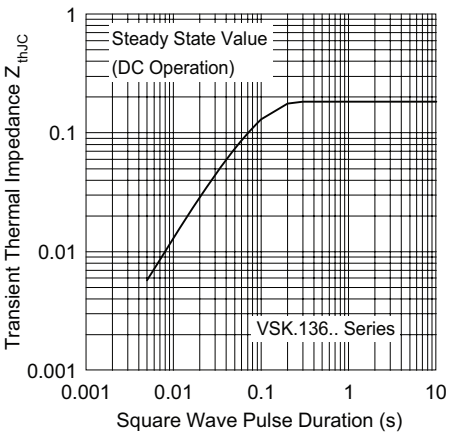


Fig. 31 - Thermal Impedance Z_{thJC} Characteristics

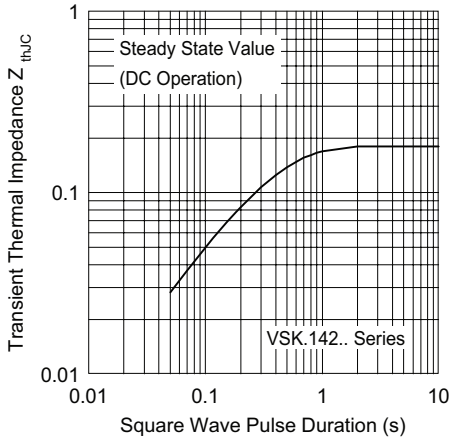


Fig. 32 - Thermal Impedance Z_{thJC} Characteristics

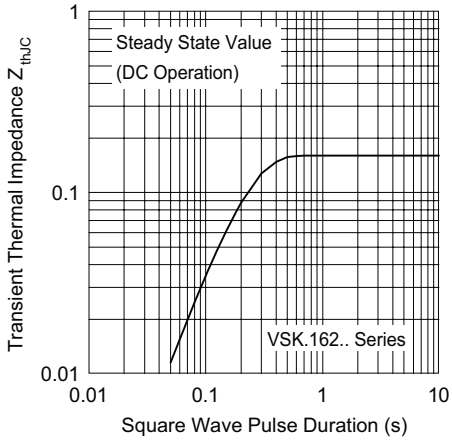


Fig. 33 - Thermal Impedance Z_{thJC} Characteristics

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

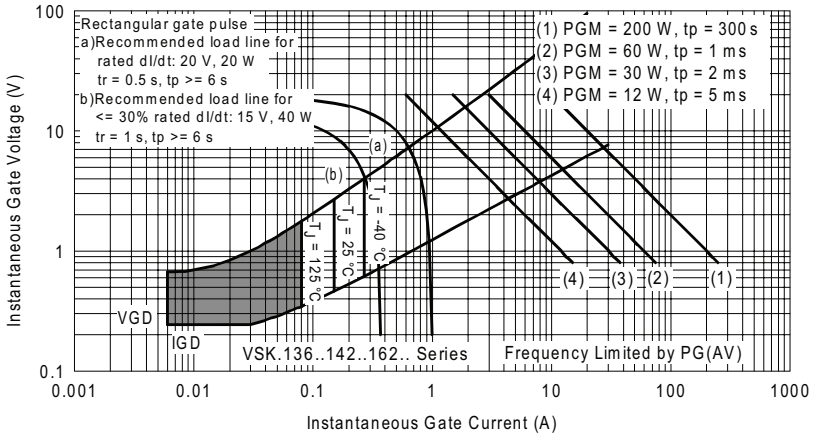


Fig. 34 - Gate Characteristics

ORDERING INFORMATION TABLE

Device code


VSK	T	162	/	16	PbF
1	2	3		4	5

1 - Module type
2 - Circuit configuration
3 - Current rating: $I_{T(AV)}$
4 - Voltage code x 100 = V_{RRM}
5 - PbF = Lead (Pb)-free

Note

- To order the optional hardware go to www.vishay.com/doc?95172

CIRCUIT CONFIGURATION

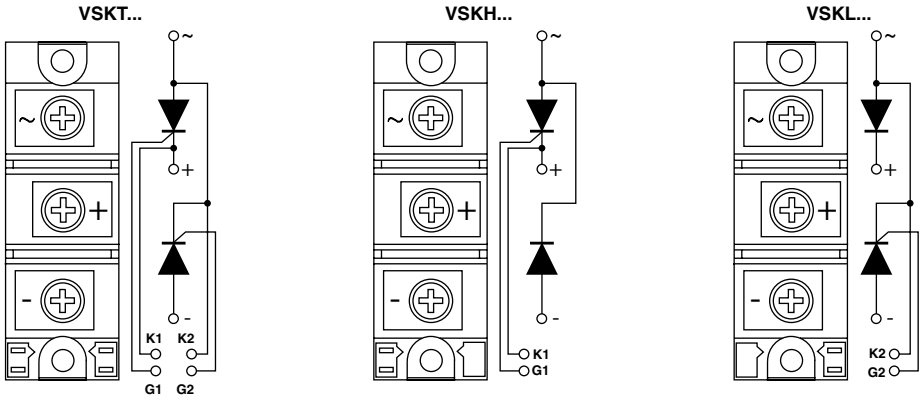


LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95067

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

INT-A-PAK IGBT/Thyristor

DIMENSIONS in millimeters (inches)

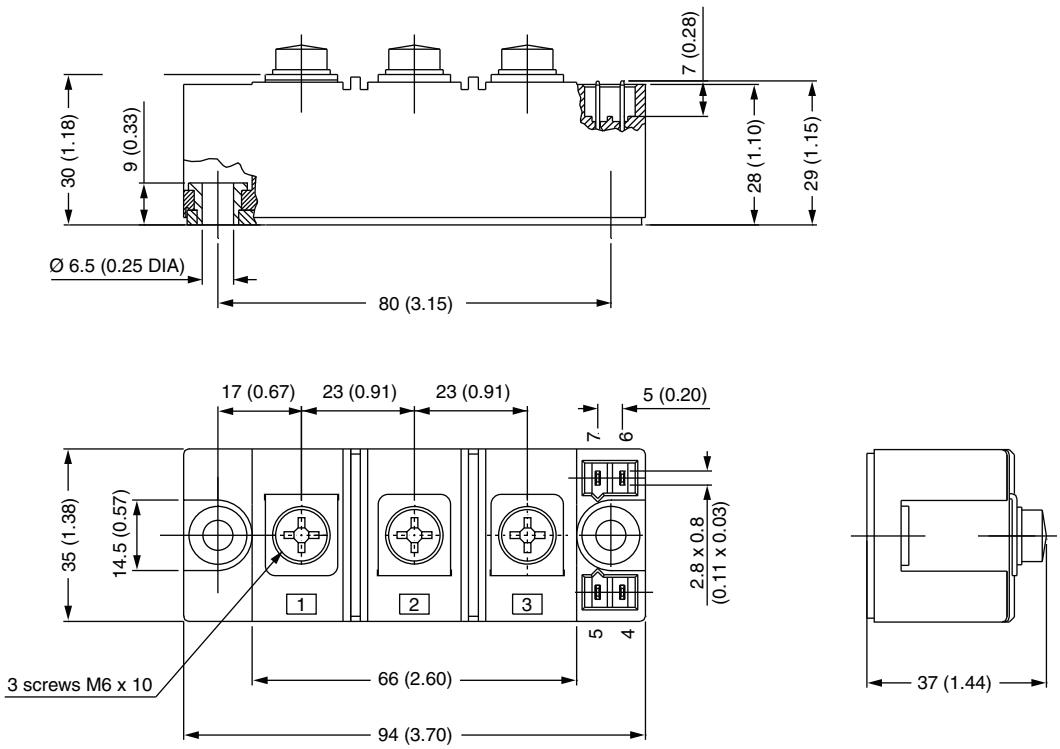

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP