

- Transitions two serial ports, USB port, PMC I/O, IDE, and floppy signals from CompactPCI® J3 and J5 connectors to standard I/O connectors
- Provides two DB-9 male serial port connectors
- Provides enhanced IDE 40-pin connector
- Provides 34-pin floppy disk drive connector
- Provides one standard USB connector
- Provides two standard 68-pin connectors for PMC I/O
- IEEE P1101.11 compliant
- CompactPCI Rev. 2.1 compliant
- 6U height, 80 mm minimum depth

INTRODUCTION — The VMIACC-0577 is designed to be used in conjunction with the VMICPCI-7755, -7756, and -7699 single-board computers (SBCs). The VMIACC-0577 mounts in the rear transition area of the backplane and provides access to the serial, USB, enhanced IDE, floppy, and PMC I/O by way of the J3 and J5 connectors.

The CompactPCI J3 and J5 connectors carry all associated signals from the 6U front mount SBCs through the backplane to the VMIACC-0577 J3 and J5 connectors (see Figure 1).

HEADERS AND CONNECTORS — The two serial ports use standard DB-9 male connectors. The USB port is a standard USB connector. The IDE and floppy are standard 40- and 34-pin header connectors, respectively. IDE and floppy cabling should be limited to a maximum of 18 inches. The PMC I/O signals are supported on two 68-pin mass termination connectors (Robinson Nugent P50E-068-PI-SRI-TG or Kel 8830E-068-170L) available on the rear panel.

PHYSICAL/ENVIRONMENTAL

Physical Dimensions: 6U single Eurocard format, single slot

Height: 9.2 in. (233.4 mm)

Depth: 3.15 in. (80 mm)


Thickness: 0.8 in. (20.3 mm)

Power Requirements: Power for the VMIACC-0577 is +5 V, supplied through the J3 connector on the CompactPCI backplane

Temperature Range: 0 to 70 C° operating, forced air cooling required

Relative Humidity Range: 10 to 90 percent, noncondensing

MTBF: 1,920,318 hours (Bellcore)

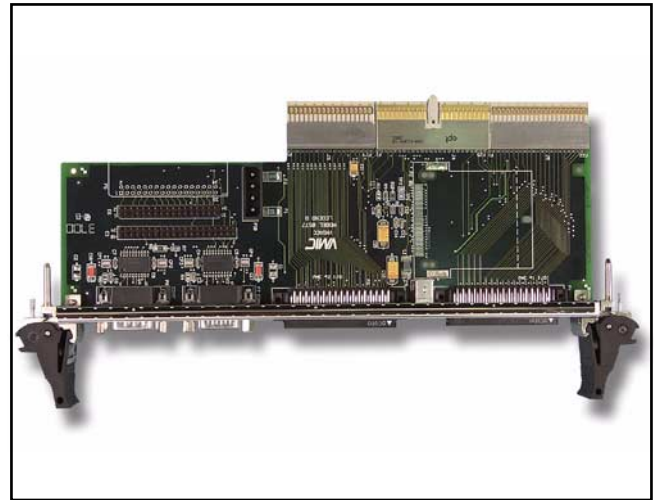

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. CompactPCI and PICMG are registered trademarks of PCI Industrial Computer Manufacturers' Group. Other registered trademarks are the property of their respective owners.



Ordering Options							
May 1, 2002 800-800577-000 B	A	B	C	-	D	E	F
VMIACC-0577	-	0	0	0	-		
ABC = 000 (Options reserved for future use)							
<p>For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 E-mail: info@vmic.com Web Address: www.vmic.com Copyright © February 2000 by VMIC Specifications subject to change without notice.</p>							

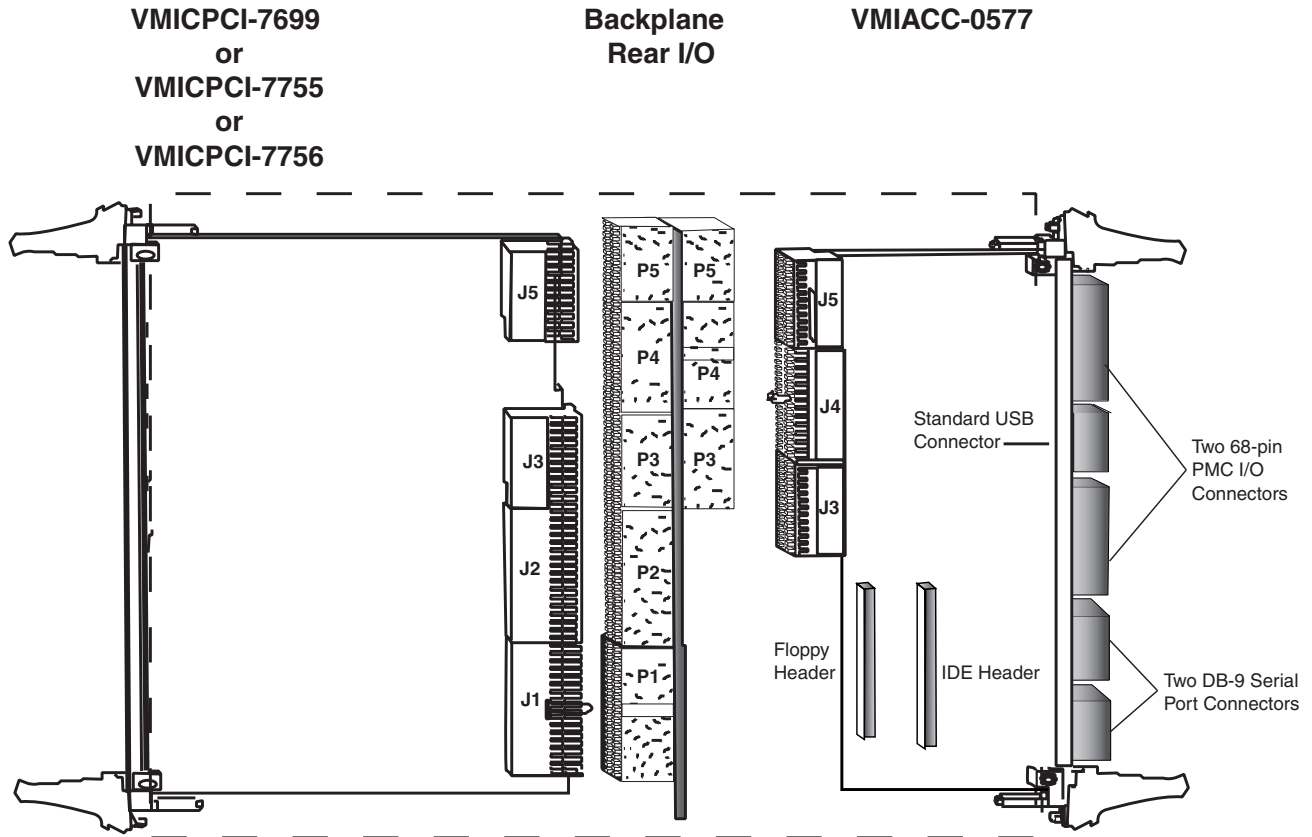


Figure 1. VMIACC-0577 and Rear I/O with VMICPCI-7699, -7755, or -7756