ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIVME-2528-110* at our website: ***Click HERE***

VMIVME-2528
128-bit TTL Digital Input/Output Board

- 128 bits of TTL compatible I/O
- Individual port direction control jumpers
- 24 mA output current sink capability
- 8- or 16-bit transfers
- Double Eurocard form factor
- Nonprivileged or supervisory short I/O transfers
- Alternating grounds on I/O pins
- Real time loopback
- Positive or negative true data I/O option

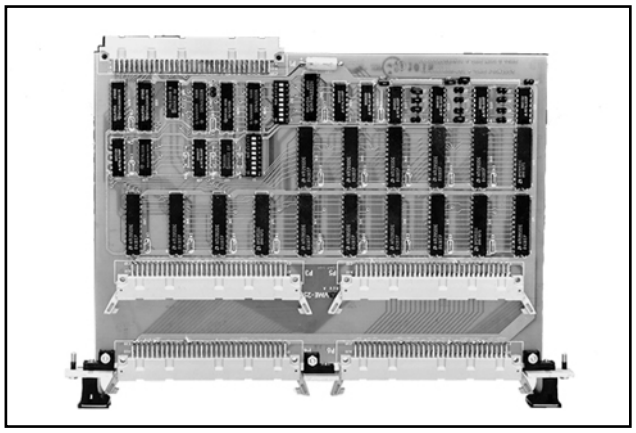

FUNCTIONAL CHARACTERISTICS

Compatibility: VMEbus specification compatible double height form factor

I/O Connector Type: 64-pin DIN 41612

I/O Organization: Sixteen I/O ports, eight bits wide. Addressable to any address within short supervisory or short nonprivileged I/O map. Individual port direction control jumpers are provided.

Addressing Scheme: Sixteen ports individually addressable on 8- or 16-bit boundaries. Twelve DIP switches provide unlimited short data I/O address map selection.

Data Transfer Bus: A16: D16

Powerup Initialization: All outputs are initialized in the tristate mode by master clear. Any write transfer to the final port automatically releases tristate mode.

I/O Circuit: TTL compatible
Sink - 24 mA
Source - 6.5 mA

Data Polarity: High-true or low-true

Installation: Any slot except A1

PHYSICAL/ENVIRONMENTAL

Temperature Range: 0 to 55 °C, operating
-20 to 85 °C, storage

Relative Humidity Range: 20 to 80 percent, noncondensing

Cooling: Convection

Power Requirements: +5 V at 3 A maximum

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Other registered trademarks are the property of their respective owners.

Ordering Options								
October 28, 1994 800-002528-000 B	A	B	C	–	D	E	F	
VMIVME-2528	–			0	–			

AB = Input Option/Output Options
11 = Positive True
00 = Negative True
C = 0 (Option reserved for future use)

Connector Data	
Compatible Cable Connector	Panduit No. 120-964-435E
Strain Relief	Panduit No. 100-000-032
PC Board Connector	Panduit No. 120-964-033A

For Ordering Information, Call:
1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859
E-mail: info@vmic.com Web Address: www.vmic.com
Copyright © January 1986 by VMIC
Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

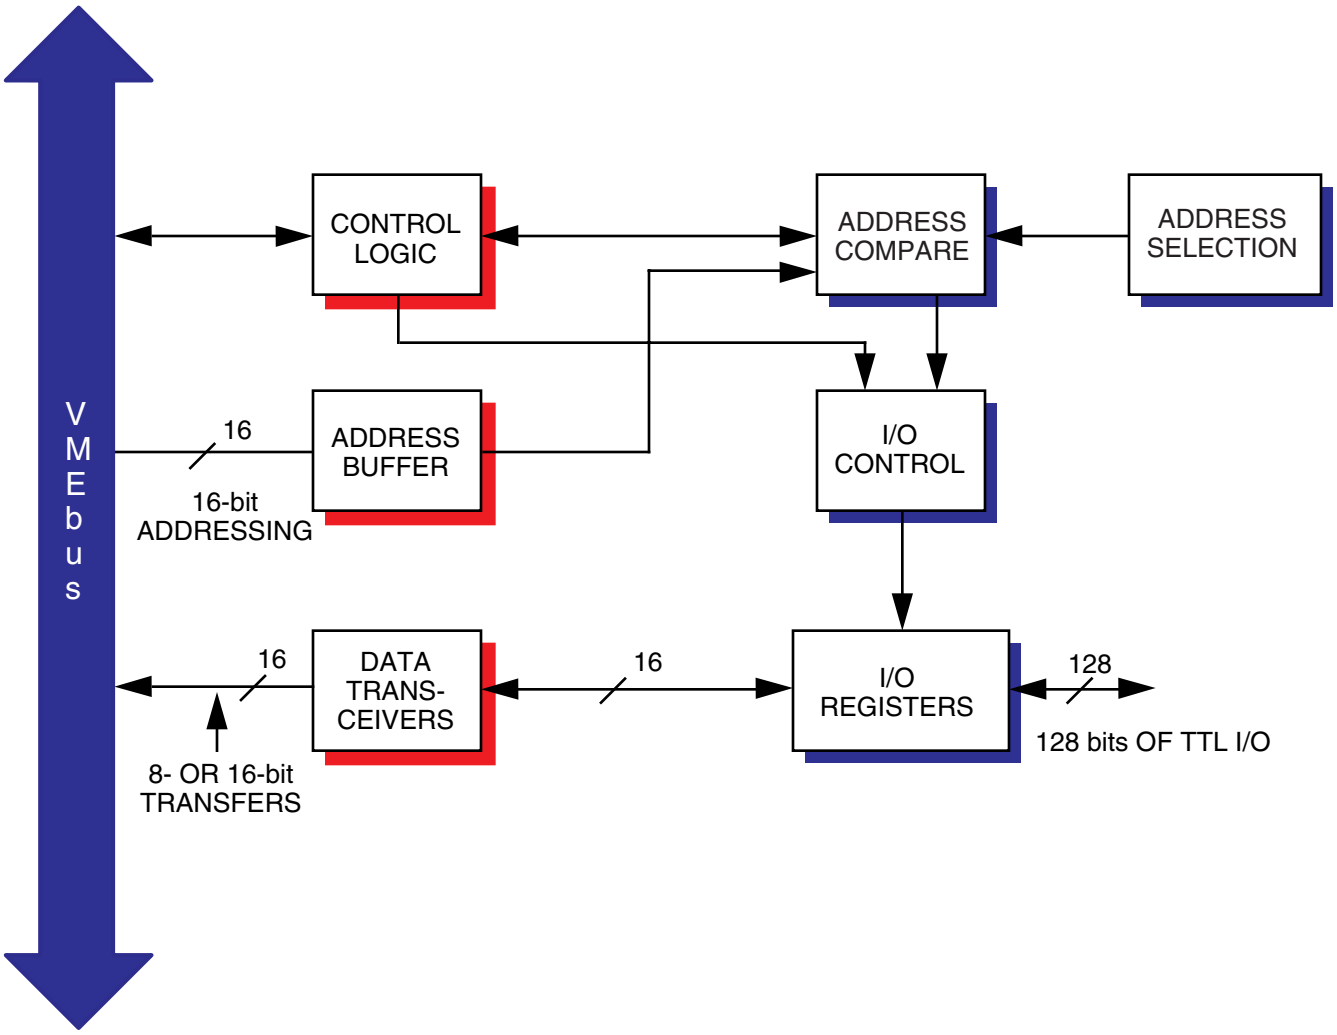


Figure 1. VMIVME-2528 Functional Block Diagram

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP