ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIVME-DR11W* at our website: ***Click HERE***

VMIVME-DR11W-A

VMEbus High-Performance DR11W Interface

- Provides parallel DR11W-A and DRV11-WA-compatible interface from VMEbus to DEC, Concurrent/Masscomp, Prime, Sun Workstations, Data General, Harris Night Hawk, IBM PC/AT, Multibus, and VERSAbus
- 32-bit data transfers
- 32-bit addressing
- Provides interface to high-resolution graphics terminals such as Raster Technologies, Megatek, and Chromatics
- Byte and word swapping (selectable under software control)
- Watchdog timers prevent transfer lockout on VMEbus and cables
- Front panel fail LED
- Supports off-line Built-in-Test plus single board loopback testing (with test cable)
- Meets VMEbus spec. C.1 - compatible address pipelining
- Fully programmable operation (includes selection of 16-/32-bit transfer, burst mode, etc.)
- Fully programmable interrupt levels and vectors
- Software compatible with VMIC's DR11W and DR11W-485 boards with allowances for longwords and defined function 1-bit (direction)
- Two VMIVME-DR11W-As form VMEbus-to-VMEbus link
- UNIX system V.3 driver available

SPECIFICATIONS

As a Master: A24:A32:D8:D16:D32
Bus request levels 0, 1, 2, or 3 (jumper-selectable)

As a Slave: A16:A24:D8:D16
Addressable on 256-byte boundaries in short I/O space
Addressable in top 64 Kbyte or bottom 64 Kbyte of standard address space

Bus Grant Delay: 70 ns (see note)

TRANSFER SPECIFICATIONS

Maximum Transfer Rate:

Burst: 1.8 Mbyte/s[1] (VME-to-VME)
1.0 Mbyte/s (Q-Bus)

Single cycle: 1.1 Mbyte/s[1] (VME-to-VME)
0.5 Mbyte/s (Q-Bus)

Maximum Block Size: 256 Kbyte minus 4 bytes

Transfer Size: 8, 16, 32 bits[2]

Transfer Mode: Bidirectional half-duplex


Addressing Range: 32 bits

I/O CABLES (Not Included)

Connection Cables: Two 40-conductor flat-ribbon cables (high quality shielded cables required)

1. Measured transfer rate when two VMIVME-DR11W-A's interfaces are used back-to-back for a VME-to-VME link (10 ft in 32-bit data transfer mode).

2. A 32-bit global memory is required for 32-bit transfers.

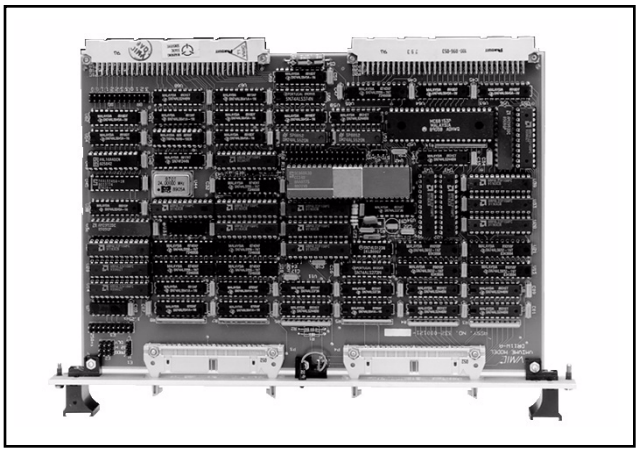

Maximum Cable Length: 50 ft[3]

POWER REQUIREMENTS

4.5 A (estimate) typical at +5 VDC

PHYSICAL/ENVIRONMENTAL

Temperature: 0 to 55 °C, operating
-20 to 85 °C, storage

Relative Humidity Range: 20 to 80 percent, noncondensing

Cooling: Convection

Dimensions: Double Eurocard 160 x 233.4 x 12.5 mm

Fail LED: A Fail LED is provided which is illuminated at power up and extinguished under program control upon successful diagnostic execution

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Other registered trademarks are the property of their respective owners.

3. If used with a non-VMIC DR11W product, the maximum cable length may be limited by that product.

Note — For optimum system performance, VMIC recommends that a different bus request level be used for each DR11W-A controller located on the same VMEbus chassis. Up to 19 DR11W-A controllers may use the same request level; however, the total bus grant delay will significantly reduce the throughput of the controllers near the end of the daisy chain.

Ordering Options
October 28, 1994 800-000121-000 C
VMIVME-DR11W-A
For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 E-mail: info@vmic.com Web Address: www.vmic.com Copyright © March 1989 by VMIC Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

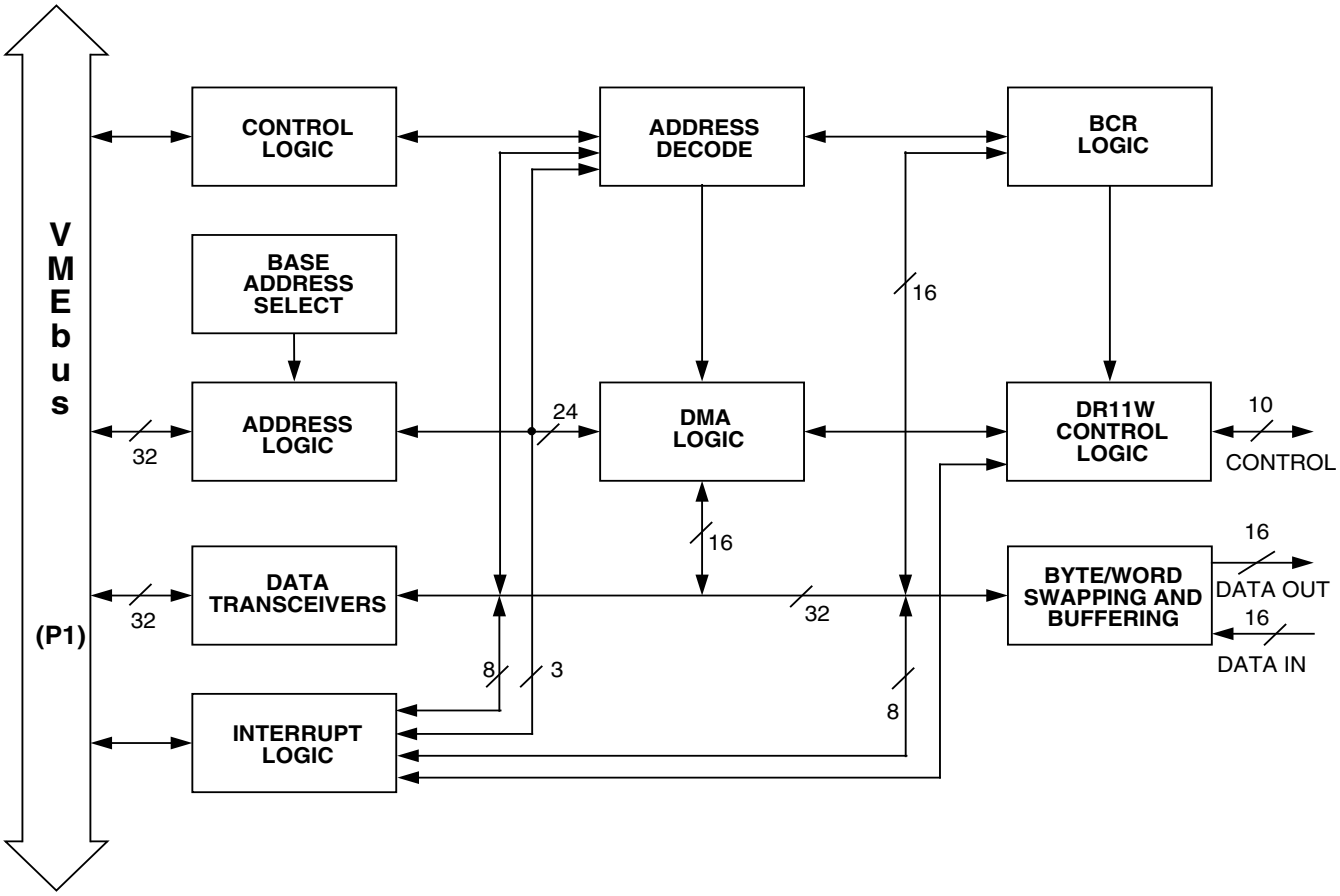


Figure 1. VMIVME-DR11W-A Functional Block Diagram

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


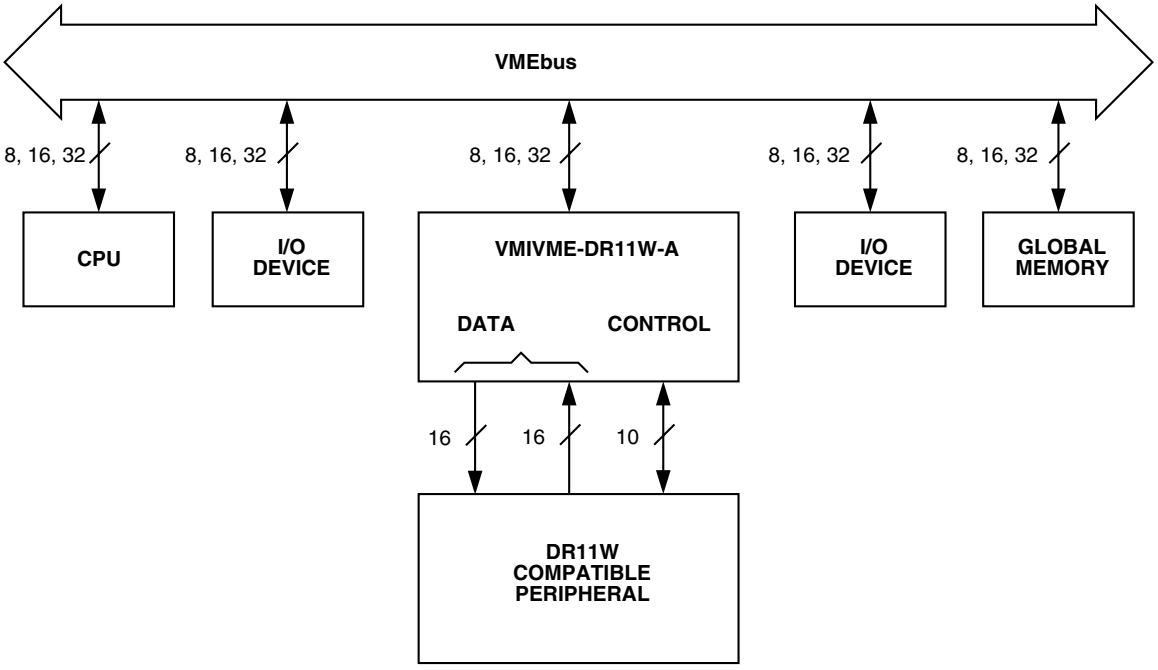


Figure 2. VMIVME-DR11W-A Connection to User Device

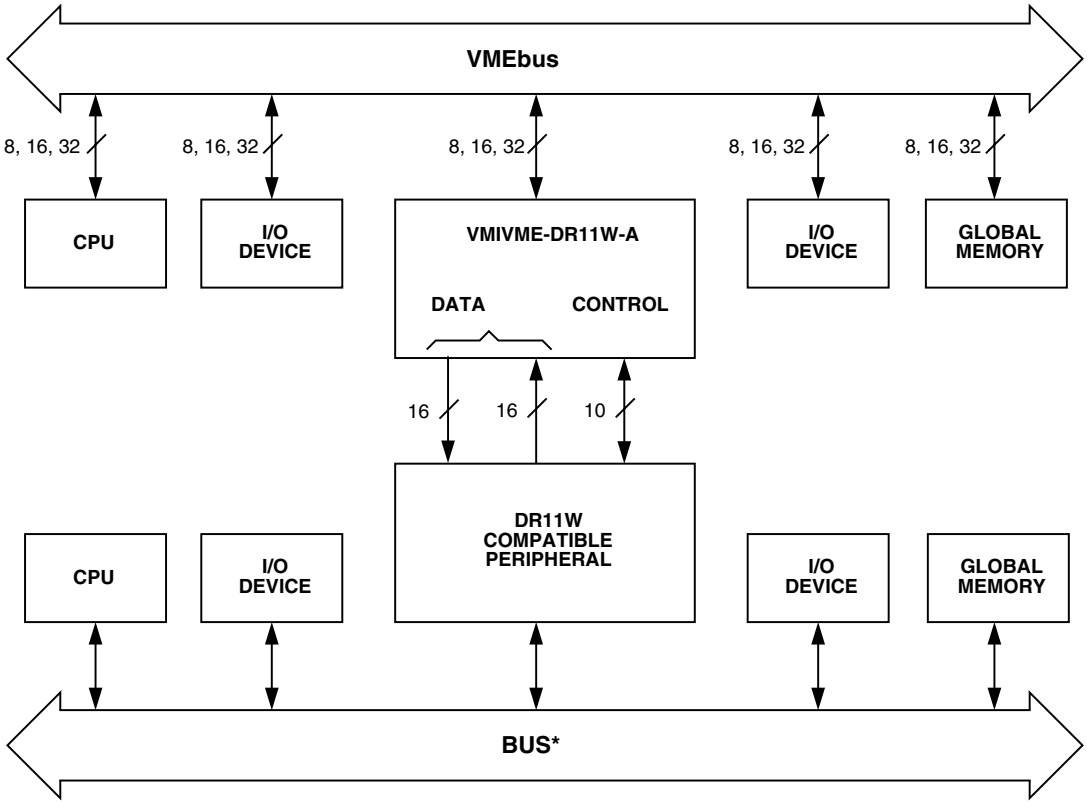

*DEC, Concurrent/Masscomp, Data General, Harris Night Hawk, Prime, IBM PC/AT, Sun Workstations, or other VMEbus-based machines.

Figure 3. DR11W-A CPU-to-CPU Link

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP