

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Ametek / VTI Instruments / VXI Technology SMP5003* at our website: ***Click HERE***

VXI Technology™


General Purpose 2 A Relays

Overview


These high-density basic switch modules are designed for general purpose switching where individual relays can be used to route signals to/from the units under test (UUT), or combined externally to form user-defined configurations. The latter approach allows the same switch module to be used for testing multiple UUTs by simply changing the configuration within a UUT-specific external adapter. Up to 480 individual SPST relays, 300 individual SPDT, or 156 SP4T relays can be accommodated in a double-slot VXIbus card (SMP1200) for maximum density.



SMP5001 - 1 of 80 SPST



SMP5002 - 1 of 50 SPDT

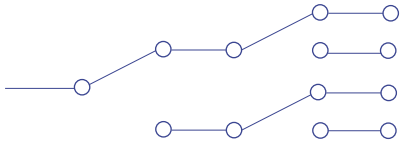

SMP5003 - 1 of 26 SP4T

Specifications

Maximum Switching Voltage:	300 V ac, 300 V dc
Maximum Switching Current:	2 A
Maximum Switching Power:	60 W dc, 125 VA
Path Resistance:	<300 mΩ
Insulation Resistance:	>1x10^9 Ω
Maximum Thermal Offset per Channel (HI-LO):	<7 µV
Capacitance:	
Open Channel:	<50 pF
Channel-Mainframe:	<80 pF
High-Low:	<50 pF
Bandwidth (-3 dB):	> 100 MHz
Insertion Loss:	
100 kHz:	<0.1 dB
1 MHz:	<0.2 dB
10 MHz:	<1.0 dB
Crosstalk:	
100 kHz:	<-80 dB
1 MHz:	<-60 dB
10 MHz:	<-40 dB
Isolation:	
100 kHz:	<-50 dB
1 MHz:	<-45 dB
10 MHz:	<-40 dB
Rated Switch Operations:	
Mechanical:	1 x 10^7
Electrical:	5 x 10^5 at full load
Switching Time:	<3ms

Features

SMP5001	80 SPST 2 A Relays
SMP5002	50 SPDT 2 A Relays
SMP5003	26 SP4T 2 A Relays

- High Channel Counts - up to 480 SPST Relays in Two VXIbus Card Slots
- Can be Mixed and Matched to Create Application Specific Configurations
- Ideal for General Purpose Switching
- SPST Relays can be Paired to Configure 40 DPST Relays per SMP5001
- SPDT Relays can be Paired to Configure 25 DPDT Relays per SMP5002

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP