ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *WEG 7518OS3E56CFL-S* at our website: *Click HERE*

WEG Rolled Steel Line

2015 Motor Catalog

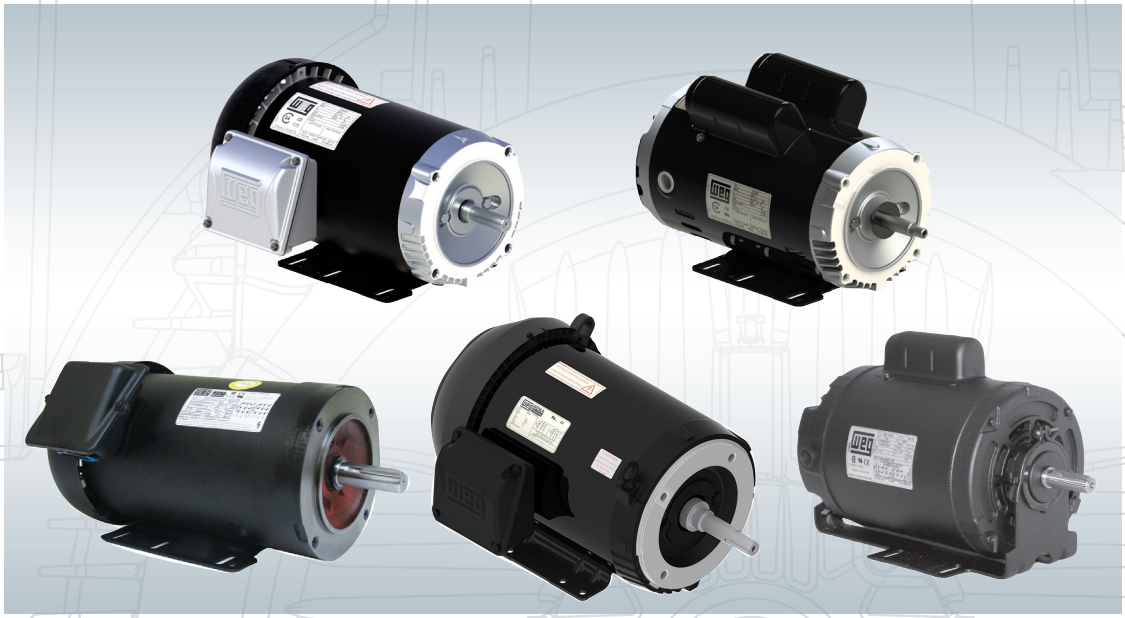



WEG Rolled Steel Line

Great WEG quality and flexibility in a new LIGHTER frame

Investing over 2.5% of our revenue in R&D for electric motors every year, WEG takes pride in engineering and manufacturing motors that run cooler, last longer, and are easy to install and maintain.

Available in Open Drip and Totally Enclosed designs our WEG Rolled Steel line is the perfect example of these efforts.

A product line with superior features that make a big difference for our customers.



Features that make a difference:

- Dual rated for 60 Hz and 50 Hz @ 190-220/380-415 V
- Optimized ventilation system for cooler operation
- Robust feet design for the toughest applications
- Frames 182/4T and larger have two eyebolts for easy mounting in any position
- Oversized diagonally split aluminum terminal box that exceeds IP55 requirements (Ideal for easy installation and tough environments)
- Terminal box is rotatable in 90 degrees increments for easy installation
- AEGIS® ring inside (optional) to extend bearing life when used with VFDs
- IP55 ingress protection is standard
- Suitable for VFD operation per NEMA MG1 part 31.4.4.2
- Color coded leads for easy installation
- Motor paint resistance exceeds 500 hours of salt spray test

C-Face/General Purpose Motors

Single-Phase General Purpose Motors - C-Face

TEFC- Foot Mount A-4
TEFC- Footless A-5
ODP- Foot Mount A-6
ODP- Footless A-7

Three-Phase General Purpose Motors - C-Face

TEFC- Foot Mount A-8
TEFC- Footless A-10
TEFC- Foot Mount with internal AEGIS® SGR A-12
ODP- Foot Mount A-13
ODP- Footless A-16
ODP- Foot Mount with internal AEGIS® SGR A-17

Foot Mount/General Purpose Motors

Single-Phase General Purpose Motors

TEFC- Foot Mount A-18
ODP- Foot Mount A-19
ODP - Resilient Base A-21

Three-Phase General Purpose Motors

TEFC- Foot Mount A-22
TEFC- Foot Mount with internal AEGIS® SGR A-24
ODP- Foot Mount A-26
ODP- Foot Mount with internal AEGIS® SGR A-29
ODP- Resilient Base A-30

Pump Motors

Jet Pump Single-Phase (56C/56J Frames)

TEFC- Foot Mount A-31
TEFC- Footless A-31
ODP- Foot Mount A-32
ODP- Footless A-32

Jet Pump Three-Phase (56C/56J Frames)

TEFC- Foot Mount A-33
TEFC- Footless A-33
ODP- Foot Mount A-34
ODP- Footless A-34

Close-Coupled Pump Motors - Three Phase

JM- TEFC - Foot Mount A-35
JP- TEFC - Foot Mount A-37
JM- ODP- Foot Mount A-39
JP- ODP - Foot Mount A-41
JM- ODP-Footless Vertical A-43
JP- ODP-Footless Vertical A-44
JM- ODP with internal AEGIS® SGR A-45
JP- ODP with internal AEGIS® SGR A-46



SINGLE-PHASE

TEFC - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3600	B56C	.2536ES1BB56C	280	F1	31	1.15	2.3	50	11.102	115/208-230	9
		1800	B56C	.2518ES1BB56C	288	F1	33	1.15	2.35	57.7	11.102	115/208-230	9
0.33	0.25	3600	B56C	.3336ES1BB56C	288	F1	36	1.15	2.85	53	11.102	115/208-230	9
		3600	W56C	.3336ES1BW56C-S	288	F1	36	1.15	2.6	54	11.102	115/208-230	9
		1800	B56C	.3318ES1BB56C	304	F1	36	1.15	2.8	61	11.102	115/208-230	9
0.5	0.37	3600	B56C	.5036ES1BB56C	313	F1	40	1.15	3.8	58	11.102	115/208-230	9
		1800	B56C	.5018ES1BB56C	333	F1	41	1.15	3.7	66.5	11.102	115/208-230	9
		1800	B56C	.5018ES1BOB56C	348	F1	41	1.15	3.7	66.5	11.102	115/208-230	9
		1800	W56C	.5018ES1BW56C-S	333	F1	41	1.15	4	64	11.894	115/208-230	9
		1200	D56C	.5012ES1BD56C	535	F1	41	1.15	3.6	71	12.283	115/208-230	9
0.75	0.55	3600	56C	.7536ES1B56C-S	353	F1	41	1.15	4	66	12.721	115/208-230	9
		3600	B56C	.7536ES1BB56C	353	F1	41	1.15	5.2	64	11.102	115/208-230	9
		1800	56C	.7518ES1B56C-S	370	F1	46	1.15	5.3	68.5	13.114	115/208-230	9
		1800	B56C	.7518ES1BB56C	370	F1	46	1.15	5.3	68.5	11.102	115/208-230	9
		1200	F56HC	.7512ES1BF56C	669	F1	56	1.15	5	71	13.464	115/208-230	9
1	0.75	3600	D56C	00136ES1BD56C	378	F1	46	1.15	6.4	67	12.283	115/208-230	9
		1800	56C	00118ES1B56C-S	424	F1	52	1.15	6.8	71	13.114	115/208-230	9
		1800	D56C	00118ES1BD56C	424	F1	52	1.15	7	70.3	12.283	115/208-230	9
		1800	D56C	00118ES1BOD56C	439	F1	52	1.15	7	70.3	12.283	115/208-230	9
1.5	1.1	3600	D56C	00156ES1BD56C	454	F1	56	1.15	8.55	70	12.283	115/208-230	9
		1800	F56HC	00158ES1BF56C	478	F1	58	1.15	8.7	76.5	13.464	115/208-230	9
		1800	F56HC	00158ES1BOF56C	493	F1	58	1.15	8.7	76.5	13.464	115/208-230	9
2	1.5	3600	F56HC	00236ES1BF56C	537	F1	65	1.15	10	74	13.464	115/208-230	9
		1800	G142/5TC	00218ES1B145TC	643	W1	68	1.15	10.5	78.1	14.882	115/208-230	9
3	2.2	3600	G143/5T	00336ES1E145TC	858	W1	66	1.15	6.00	84	14.882	208-230/460	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



SINGLE-PHASE

TEFC - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	B56C	**.3336ES1BB56CFL**	**288**	F1	36	1.15	2.85	53	11.102	115/208-230	9;20
		1800	B56C	**.3318ES1BB56CFL**	**304**	F1	36	1.15	2.8	61	11.102	115/208-230	9;20
0.5	0.37	3600	B56C	**.5036ES1BB56CFL**	**313**	F1	40	1.15	3.8	58	11.102	115/208-230	9;20
		1800	B56C	**.5018ES1BB56CFL**	**333**	F1	41	1.15	3.7	66.5	11.102	115/208-230	9;20
		1200	D56C	**.5012ES1BD56CFL**	**535**	F1	44	1.15	3.6	71	12.283	115/208-230	9;20
0.75	0.55	3600	B56C	**.7536ES1BB56CFL**	**353**	F1	41	1.15	5.2	64	11.102	115/208-230	9;20
		1800	56C	**.7518ES1B56CFL-S**	**370**	F1	46	1.15	5.3	68.5	13.114	115/208-230	9;20
		1800	B56C	**.7518ES1BB56CFL**	**370**	F1	46	1.15	5.3	68.5	11.102	115/208-230	9;20
		1200	F56C	**.7512ES1BF56CFL**	**669**	F1	56	1.15	5	71	13.464	115/208-230	9;20
1	0.75	3600	D56C	**00136ES1BD56CFL**	**378**	F1	46	1.15	6.4	67	12.283	115/208-230	9;20
		1800	D56C	**00118ES1BD56CFL**	**424**	F1	52	1.15	7	70.3	12.283	115/208-230	9;20
1.5	1.1	3600	D56C	**00156ES1BD56CFL**	**454**	F1	56	1.15	8.55	70	12.283	115/208-230	9;20
		1800	F56C	**00158ES1BF56CFL**	**478**	F1	58	1.15	8.7	76.5	13.464	115/208-230	9;20
2	1.5	3600	F56C	**00236ES1BF56CFL**	**537**	F1	65	1.15	10	74	13.464	115/208-230	9;20

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



SINGLE-PHASE

ODP - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.12	0.09	1800	B48C	.12180S1BB48C	222	F1B	17	1.4	1.6	48.1	9.252	115/208-230	9
0.16	0.12	3600	48C	.16360S1B48C-S	237	F1B	17	1.35	1.4	53	9.492	115/208-230	9
		3600	B48C	.16360S1BB48C	237	F1B	17	1.35	1.55	49.9	9.252	115/208-230	9
		1800	48C	.16180S1B48C-S	231	F1B	17	1.35	1.7	53	9.492	115/208-230	9
		1800	B48C	.16180S1BB48C	231	F1B	17	1.35	1.85	50.3	9.252	115/208-230	9
		1800	B48C	.16180S1BSPB48C	247	F1B	19	1.35	1.9	49.9	9.252	115/208-230	9;16
0.25	0.18	3600	56C	.25360S1B56C	241	F1B	19	1.35	2.15	54.7	9.646	115/208-230	9
		3600	W56C	.25360T1BW56C-S	281	F2B	19	1.35	1.25	66.6	9.866	115/208-230	9
		3600	B48C	.25360S1BB48C	241	F1B	19	1.35	2.15	54.7	9.252	115/208-230	9
		3600	48C	.25360T1B48C-S	277	F2B	19	1.35	1.25	66.6	9.492	115/208-230	9
		1800	56C	.25180S1B56C	233	F1B	19	1.35	2.65	55.9	9.646	115/208-230	9
		1800	B48C	.25180S1BB48C	233	F1B	19	1.35	2.65	55.9	9.252	115/208-230	9
		1800	B48C	.25180S1BSPB48C	263	F1B	20	1.35	2.4	59.5	9.252	115/208-230	9;16
		1800	48C	.25180T1B48C-S	269	F2B	19	1.35	1.6	68.5	9.492	115/208-230	9
		1800	W56C	.25180T1BW56C-S	269	F2B	19	1.35	1.6	68.5	9.866	115/208-230	9
0.33	0.25	3600	C48C	.33360S1BC48C	244	F1B	22	1.35	2.85	57.6	10.197	115/208-230	9
		3600	48C	.33360T1B48C-S	282	F2B	22	1.35	1.6	70.5	9.886	115/208-230	9
		3600	C56C	.33360S1BC56C	244	F1B	22	1.35	2.85	57.6	10.551	115/208-230	9
		3600	W56C	.33360T1BW56C-S	285	F2B	22	1.35	1.6	70.5	10.26	115/208-230	9
		1800	C48C	.33180S1BC48C	258	F1B	22	1.35	3.11	58.6	10.197	115/208-230	9
		1800	C48C	.33180S1BSPC48C	282	F1B	22	1.35	3.13	60	10.197	115/208-230	9;16
		1800	48C	.33180T1B48C-S	274	F2B	22	1.35	2.1	72.4	9.886	115/208-230	9
		1800	C56C	.33180S1BC56C	258	F1B	22	1.35	3.3	58.2	10.551	115/208-230	9
		1800	W56C	.33180T1BW56C-S	303	F2B	22	1.35	2.1	72.4	10.26	115/208-230	9
0.5	0.37	3600	C48C	.50360S1BC48C	258	F1B	24	1.25	3.6	64.4	10.197	115/208-230	9
		3600	48C	.50360T1B48C-S	300	F1B	24	1.25	2.4	72.4	9.886	115/208-230	9
		3600	C56C	.50360S1BC56C	266	F1B	24	1.25	3.6	64.4	10.551	115/208-230	9
		3600	W56C	.50360T1BW56C-S	310	F1B	24	1.25	2.4	72.4	10.26	115/208-230	9
		1800	C48C	.50180S1BSPC48C	300	F1B	24	1.25	4	63.5	10.197	115/208-230	9
		1800	C48CH	.50180S1BC48CH	296	F1B	24	1.25	4.25	61.7	10.197	115/208-230	9
		1800	C56C	.50180S1BC56C	286	F1B	24	1.25	4.25	61.7	10.551	115/208-230	9
		1800	C56C	.50180S1BOC56C	301	F1B	24	1.25	4.25	61.7	10.551	115/208-230	9
		1800	W56C	.50180T1BOW56C-S	352	F1B	24	1.25	2.75	76.2	10.654	115/208-230	9
		1800	W56C	.50180T1BW56C-S	335	F1B	24	1.25	2.75	76.2	10.654	115/208-230	9
0.75	0.55	3600	B56C	.75360S1BB56C	297	F1B	32	1.25	5.25	67.2	11.102	115/208-230	9
		3600	56C	.75360T1B56C-S	348	F1B	32	1.25	3.4	76.2	11.89	115/208-230	9
		1800	D56C	.75180S1BD56C	349	F1B	36	1.25	5.4	66.7	12.283	115/208-230	9
		1800	56C	.75180T1B56C-S	415	F1B	36	1.25	3.4	81.8	11.89	115/208-230	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.





SINGLE-PHASE

ODP - Foot Mount - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	3600	D56C	00136OS1BD56C	317	F1B	36	1.25	6.8	66.3	12.283	115/208-230	9
		3600	56C	00136OT1B56C-S	375	F1B	36	1.25	4.3	80.4	11.89	115/208-230	9
		1800	D56C	00118OS1BD56C	378	F1B	39	1.15	7	71.4	12.283	115/208-230	9
		1800	56C	00118OT1B56C-S	449	F1B	39	1.15	4.5	82.6	12.677	115/208-230	9
1.5	1.1	3600	D56C	00156OS1BD56C	355	F1B	40	1.15	8.9	70	12.283	115/208-230	9
		3600	56C	00156OT1B56C-S	421	F1B	40	1.15	6.2	81.5	12.284	115/208-230	9
		1800	F56HC	00158OS1BF56C	461	F1B	37	1.15	10.2	71.3	13.464	115/208-230	9
		1800	56HC	00158OT1B56C-S	551	F1B	37	1.15	6.8	83.8	13.071	115/208-230	9
2	1.5	3600	F56HC	00236OS1BF56C	432	F1B	41	1.15	11	77.9	13.464	115/208-230	9
		3600	56HC	00236OT1B56C-S	513	F1B	41	1.15	8.4	82.9	12.677	115/208-230	9
		1800	G56HC	00218OS1BG56C	544	F1B	43	1	14	71.4	13.858	115/208-230	1;9
		1800	56HC	00218OT1B56C-S	654	F1B	43	1.15	9.3	84.5	13.858	115/208-230	1;9
3	2.2	3600	G56HC	00336OS1BG56C	496	F1B	44	1	15.5	78	13.858	115/208-230	1;9
		3600	56HC	00336OT1B56C-S	596	F1B	44	1.15	12.2	84.1	13.858	115/208-230	1;9

ODP - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	C56C	.33360S1BC56CFL	244	F1B	22	1.35	2.85	57.6	10.551	115/208-230	9;20
		3600	W56C	.33360T1BW56CFL-S	285	F2B	22	1.35	1.6	70.5	10.26	115/208-230	9;20
		1800	C56C	.33180S1BC56CFL	258	F1B	22	1.35	3.3	58.2	10.551	115/208-230	9;20
		1800	W56C	.33180T1BW56CFL-S	303	F2B	22	1.35	2.1	72.4	10.26	115/208-230	9;20
0.5	0.37	3600	C56C	.50360S1BC56CFL	266	F1B	24	1.25	3.6	64.4	10.551	115/208-230	9;20
		3600	W56C	.50360T1BW56CFL-S	310	F2B	24	1.25	2.4	72.4	10.26	115/208-230	9
		1800	C56C	.50180S1BC56CFL	286	F1B	24	1.25	4.25	61.7	10.551	115/208-230	9;20
		1800	W56C	.50180T1BW56CFL-S	335	F2B	24	1.25	2.75	76.2	10.654	115/208-230	9;20
0.75	0.55	3600	B56C	.75360S1BB56CFL	297	F1B	32	1.25	5.25	67.2	11.102	115/208-230	9;20
		3600	56C	.75360T1B56CFL-S	348	F2B	32	1.25	3.4	76.2	11.89	115/208-230	9;20
		1800	D56C	.75180S1BD56CFL	349	F1B	36	1.25	5.4	66.7	12.283	115/208-230	9;20
		1800	56C	.75180T1B56CFL-S	415	F2B	36	1.25	3.4	81.8	11.89	115/208-230	9;20
1	0.75	3600	D56C	00136OS1BD56CFL	317	F1B	36	1.25	6.8	66.3	12.283	115/208-230	9;20
		3600	56C	00136OT1B56CFL-S	375	F2B	36	1.25	4.3	80.4	11.89	115/208-230	9;20
		1800	D56C	00118OS1BD56CFL	378	F1B	39	1.15	7	71.4	12.283	115/208-230	9;20
		1800	56C	00118OT1B56CFL-S	449	F2B	39	1.15	4.5	82.6	12.677	115/208-230	9;20
1.5	1.1	3600	D56C	00156OS1BD56CFL	355	F1B	40	1.15	8.9	70	12.283	115/208-230	9;20
		3600	56C	00156OT1B56CFL-S	421	F2B	40	1.15	6.2	81.5	12.284	115/208-230	9;20
		1800	F56C	00158OS1BF56CFL	461	F1B	37	1.15	10.2	71.3	13.464	115/208-230	9;20
		1800	56HC	00158OT1B56CFL-S	551	F2B	37	1.15	6.8	83.8	13.071	115/208-230	9
2	1.5	3600	F56C	00236OS1BF56CFL	432	F1B	41	1.15	11	77.9	13.464	115/208-230	9;20
		3600	56C	00236OT1B56CFL-S	513	F2B	41	1.15	8.4	82.9	12.677	115/208-230	9;20
		1800	G56C	00218OS1BG56CFL	544	F1B	43	1	14	71.4	13.858	115/208-230	1;9;20
		1800	56C	00218OT1B56CFL-S	654	F2B	43	1.15	9.3	84.5	13.858	115/208-230	1;9;20
3	2.2	3600	G56C	00336OS1BG56CFL	496	F1B	44	1	15.5	78	13.858	115/208-230	1;9;20
		3600	56C	00336OT1B56CFL-S	596	F2B	44	1.15	12.2	84.1	13.858	115/208-230	1;9;20

Please refer to back cover for description of "NOTES"

Data subject to change without notice.



THREE-PHASE

TEFC - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3600	56C	.2536ES3E56C-S	258	F1	22.00	1.15	0.46	57.5	11.142	208-230/460	9
		3600	B56C	.2536ES3EB56C	258	F1	31.00	1.15	0.45	62.0	11.102	208-230/460	9
		1800	56C	.2518ES3E56C-S	270	F1	23.00	1.15	0.52	70.0	11.146	208-230/460	9
		1800	56C	.2518ES3H56C-S	270	F1	23.00	1.15	0.42	70.0	11.146	575	9
		1800	B56C	.2518ES3EB56C	270	F1	31.00	1.15	0.50	70.0	11.102	208-230/460	9
		1800	B56C	.2518ES3HB56C	270	F1	31.00	1.15	0.40	70.0	11.102	575	9
0.33	0.25	3600	56C	.3336ES3E56C-S	270	F1	22.00	1.15	0.60	62.0	11.142	208-230/460	9
		3600	56C	.3336ES3H56C-S	270	F1	22.00	1.15	0.48	62.0	11.142	575	9
		3600	B56C	.3336ES3EB56C	270	F1	33.00	1.15	0.60	66.0	11.102	208-230/460	9
		3600	B56C	.3336ES3HB56C	270	F1	33.00	1.15	0.48	66.0	11.102	575	9
		1800	56C	.3318ES3E56C-S	274	F1	24.00	1.15	0.62	74.0	11.535	208-230/460	9
		1800	B56C	.3318ES3EB56C	274	F1	33.00	1.15	0.55	75.5	11.102	208-230/460	9
0.50	0.37	3600	56C	.5036ES3E56C-S	282	F1	24.00	1.15	0.84	68.0	11.539	208-230/460	9
		3600	56C	.5036ES3H56C-S	281	F1	24.00	1.15	0.67	68.0	11.539	575	9
		3600	B56C	.5036ES3EB56C	282	F1	36.00	1.15	0.83	72.0	11.102	208-230/460	9
		3600	B56C	.5036ES3HB56C	282	F1	36.00	1.15	0.66	72.0	11.102	575	9
		1800	56C	.5018ES3E56C-S	311	F1	26.00	1.15	0.86	77.0	11.539	208-230/460	9
		1800	56C	.5018ES3H56C-S	263	F1	26.00	1.15	0.69	77.0	11.539	575	9
		1800	B56C	.5018ES3EB56C	311	F1	34.00	1.15	1.65	78.0	11.102	208-230/460	9
		1800	B56C	.5018ES3HB56C	311	F1	34.00	1.15	1.32	78.0	11.102	575	9
		1200	56C	.5012ES3E56C-S	440	F1	30.00	1.15	0.99	72.0	12.323	208-230/460	9
		1200	B56C	.5012ES3EB56C	440	F1	36.00	1.15	1.30	70.0	11.102	208-230/460	9
0.75	0.55	3600	56C	.7536ES3E56C-S	311	F1	25.00	1.15	1.13	72.0	11.535	208-230/460	9
		3600	56C	.7536ES3H56C-S	310	F1	25.00	1.15	0.90	72.0	11.535	575	9
		3600	B56C	.7536ES3EB56C	311	F1	40.00	1.15	1.10	77.0	11.102	208-230/460	9
		3600	B56C	.7536ES3HB56C	311	F1	40.00	1.15	0.88	77.0	11.102	575	9
		1800	56C	.7518ES3E56C-S	332	F1	27.00	1.15	1.22	78.5	11.929	208-230/460	9
		1800	56C	.7518ES3H56C-S	333	F1	27.00	1.15	0.98	78.5	11.929	575	9
		1800	B56C	.7518ES3EB56C	332	F1	40.00	1.15	1.12	80.0	11.102	208-230/460	9
		1800	B56C	.7518ES3HB56C	332	F1	40.00	1.15	0.90	80.0	11.102	575	9
		1200	56HC	.7512ES3E56C-S	449	F1	34.00	1.15	1.34	75.5	12.72	208-230/460	9
		1200	D56C	.7512ES3ED56C	449	F1	40.00	1.15	1.48	81.5	12.283	208-230/460	9
1	0.75	3600	56C	00136ES3E56C-S	361	F1	28.00	1.15	1.51	74.0	11.933	208-230/460	9
		3600	56C	00136ES3H56C-S	361	F1	28.00	1.15	1.21	74.0	11.933	575	9
		3600	B56C	00136ES3EB56C	361	F1	44.00	1.15	1.40	80.0	11.102	208-230/460	9
		3600	B56C	00136ES3HB56C	361	F1	44.00	1.15	1.12	80.0	11.102	575	9
		1800	56C	00118ES3E56C-S	345	F1	32.00	1.15	1.66	80.0	12.323	208-230/460	9
		1800	56C	00118ES3H56C-S	346	F1	32.00	1.15	1.33	80.0	12.323	575	9
		1800	D56C	00118ES3ED56C	345	F1	46.00	1.15	1.55	80.5	12.283	208-230/460	9
		1800	D56C	00118ES3HD56C	345	F1	46.00	1.15	1.24	80.5	12.283	575	9
		1800	143/5TC	00118ET3E143TC-S	484	RSP	43.00	1.15	1.47	85.5	13.583	208-230/460	9
		1200	56HC	00112ES3E56C-S	454	F1	39.00	1.15	1.67	77.0	13.504	208-230/460	9
		1200	F56HC	00112ES3EF56C	454	F1	46.00	1.15	1.83	81.5	13.464	208-230/460	9
		1200	143/5TC	00112ET3E145TC-S	554	RSP	43.00	1.15	1.58	82.5	13.583	208-230/460	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

TEFC - Foot Mount - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1.5	1.1	3600	56C	00156ES3E56C-S	392	F1	31.00	1.15	1.99	77.0	12.323	208-230/460	9
		3600	56C	00156ES3H56C-S	356	F1	31.00	1.15	1.59	77.0	12.323	575	9
		3600	B56C	00156ES3EB56C	392	F1	48.00	1.15	1.96	82.5	11.102	208-230/460	9
		3600	B56C	00156ES3HB56C	392	F1	48.00	1.15	1.57	82.5	11.102	575	9
		3600	143/5TC	00156ET3E143TC-S	497	RSP	39.00	1.15	1.87	84.0	13.583	208-230/460	9
		1800	56HC	00158ES3E56C-S	384	F1	36.00	1.15	2.23	81.5	13.11	208-230/460	9
		1800	56HC	00158ES3H56C-S	384	F1	36.00	1.15	1.78	81.5	13.11	575	9
		1800	D56C	00158ES3ED56C	384	F1	52.00	1.15	2.30	80.0	12.283	208-230/460	9
		1800	D56C	00158ES3HD56C	384	F1	52.00	1.15	1.84	80.0	12.283	575	9
		1800	143/5TC	00158ET3E145TC-S	504	RSP	43.00	1.15	2.02	86.5	13.583	208-230/460	9
		1200	182/4TC	00152ET3E182TC-S	690	RSP	73.00	1.15	2.22	87.5	16.339	208-230/460	9
2	1.5	3600	56HC	00236ES3E56C-S	437	F1	36.00	1.15	2.57	81.5	13.114	208-230/460	9
		3600	56HC	00236ES3H56C-S	438	F1	36.00	1.15	2.06	81.5	13.114	575	9
		3600	D56C	00236ES3ED56C	437	F1	58.00	1.15	2.58	82.5	12.283	208-230/460	9
		3600	D56C	00236ES3HD56C	437	F1	58.00	1.15	2.06	82.5	12.283	575	9
		3600	143/5TC	00236ET3E145TC-S	539	RSP	45.00	1.15	2.47	85.5	13.976	208-230/460	9
		1800	56HC	00218ES3E56C-S	414	F1	41.00	1.15	2.85	82.5	13.504	208-230/460	9
		1800	F56HC	00218ES3EF56C	414	F1	61.00	1.15	2.90	82.0	13.464	208-230/460	9
		1800	143/5TC	00218ET3E145TC-S	558	RSP	47.00	1.15	2.72	86.5	13.976	208-230/460	9
		1200	182/4TC	00212ET3E184TC-S	747	RSP	83.00	1.15	3.00	88.5	17.126	208-230/460	9
3	2.2	3600	56HC	00336ES3E56C-S	507	F1	43.00	1.15	3.76	81.5	13.898	208-230/460	9
		3600	56HC	00336ES3H56C-S	506	F1	43.00	1.15	3.01	81.5	13.898	575	9
		3600	F56C	00336ES3HF56C	507	F1	67.00	1.15	3.04	84.0	13.464	575	9
		3600	F56HC	00336ES3EF56C	507	F1	67.00	1.15	3.80	84.0	13.464	208-230/460	9
		3600	143/5TC	00336ET3E145TC-S	674	RSP	71.00	1.15	3.51	86.5	15.157	208-230/460	9
		3600	182/4TC	00336ET3E182TC-S	698	RSP	71.00	1.15	3.67	86.5	16.339	208-230/460	9
		1800	182/4TC	00318ET3E182TC-S	610	RSP	87.00	1.15	3.81	89.5	17.894	208-230/460	9
		1200	213/5TC	00312ET3E213TC-S	1,028	RSP	142.00	1.15	4.17	89.5	19.291	208-230/460	9
5	3.7	3600	182/4TC	00536ET3E184TC-S	793	RSP	86.00	1.15	5.90	88.5	17.894	208-230/460	9
		1800	182/4TC	00518ET3E184TC-S	706	RSP	79.00	1.15	6.49	89.5	17.894	208-230/460	9
		1200	213/5TC	00512ET3E215TC-S	1,206	RSP	156.00	1.15	6.74	89.5	20.079	208-230/460	9
7.5	5.5	3600	182/4TC	00736ET3E184TC-S	985	RSP	144.00	1.15	8.57	89.5	17.126	208-230/460	9
		3600	213/5TC	00736ET3E213TC-S	1,025	RSP	144.00	1.15	8.67	89.5	20.079	208-230/460	9
		1800	213/5TC	00718ET3E213TC-S	994	RSP	131.00	1.15	9.07	91.7	18.898	208-230/460	9
		1200	254/6TC	00712ET3E254TC-S	1,859	RSP	248.00	1.15	9.98	91.0	22.559	208-230/460	9
10	7.5	3600	213/5TC	01036ET3E215TC-S	1,205	RSP	173.00	1.15	11.5	90.2	21.654	208-230/460	9
		1800	213/5TC	01018ET3E215TC-S	1,154	RSP	142.00	1.15	12.2	91.7	19.291	208-230/460	9
		1200	254/6TC	01012ET3E256TC-S	2,148	RSP	277.00	1.15	13.8	91.0	23.346	208-230/460	9
15	11	3600	254/6TC	01536ET3E254TC-S	1,649	RSP	220.00	1.15	17.4	91.0	22.559	208-230/460	9
		1800	254/6TC	01518ET3E254TC-S	1,670	RSP	242.00	1.15	18.2	92.4	22.559	208-230/460	9
20	15	3600	254/6TC	02036ET3E256TC-S	2,136	RSP	256.00	1.15	22.7	91.0	23.346	208-230/460	9
		1800	254/6TC	02018ET3E256TC-S	1,978	RSP	271.00	1.15	24.5	92.4	23.346	208-230/460	9
		1800	254/6TC	02018ET3H256TC-S	1,978	RSP	271.00	1.15	19.6	92.4	23.346	575	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

TEFC - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	56C	.3336ES3E56CFL-S	270	F1	22.00	1.15	0.60	62.0	11.142	208-230/460	9;20
		3600	56C	.3336ES3H56CFL-S	270	F1	22.00	1.15	0.48	62.0	11.142	575	9;20
		3600	B56C	.3336ES3EB56CFL	270	F1	33.00	1.15	0.60	66.0	11.102	208-230/460	9;20
		3600	B56C	.3336ES3HB56CFL	270	F1	33.00	1.15	0.48	66.0	11.102	575	9;20
		1800	56C	.3318ES3E56CFL-S	274	F1	24.00	1.15	0.62	74.0	11.535	208-230/460	9;20
		1800	B56C	.3318ES3EB56CFL	274	F1	33.00	1.15	0.55	75.5	11.102	208-230/460	9;20
0.50	0.37	3600	56C	.5036ES3E56CFL-S	282	F1	24.00	1.15	0.84	68.0	11.539	208-230/460	9;20
		3600	B56C	.5036ES3EB56CFL	282	F1	36.00	1.15	0.83	72.0	11.102	208-230/460	9;20
		1800	56C	.5018ES3E56CFL-S	311	F1	26.00	1.15	0.86	77.0	11.539	208-230/460	9;20
		1800	56C	.5018ES3H56CFL-S	281	F1	26.00	1.15	0.69	77.0	11.539	575	9;20
		1800	B56C	.5018ES3EB56CFL	311	F1	34.00	1.15	1.65	78.0	11.102	208-230/460	9;20
		1800	B56C	.5018ES3HB56CFL	311	F1	34.00	1.15	1.32	78.0	11.102	575	9;20
		1200	56C	.5012ES3E56CFL-S	440	F1	30.00	1.15	0.99	72.0	12.323	208-230/460	9;20
		1200	56C	.5012ES3H56CFL-S	441	F1	30.00	1.15	0.79	72.0	12.323	575	9;20
		1200	B56C	.5012ES3EB56CFL	440	F1	36.00	1.15	1.30	70.0	11.102	208-230/460	9;20
		1200	B56C	.5012ES3HB56CFL	440	F1	36.00	1.15	1.04	70.0	11.102	575	9;20
0.75	0.55	3600	56C	.7536ES3E56CFL-S	311	F1	25.00	1.15	1.13	72.0	11.535	208-230/460	9;20
		3600	56C	.7536ES3H56CFL-S	310	F1	25.00	1.15	0.90	72.0	11.535	575	9;20
		3600	B56C	.7536ES3EB56CFL	311	F1	40.00	1.15	1.10	77.0	11.102	208-230/460	9;20
		3600	B56C	.7536ES3HB56CFL	311	F1	40.00	1.15	0.88	77.0	11.102	575	9;20
		1800	56C	.7518ES3E56CFL-S	332	F1	27.00	1.15	1.22	78.5	11.929	208-230/460	9;20
		1800	56C	.7518ES3H56CFL-S	333	F1	27.00	1.15	0.98	78.5	11.929	575	9;20
		1800	B56C	.7518ES3EB56CFL	332	F1	40.00	1.15	1.12	80.0	11.102	208-230/460	9;20
		1800	B56C	.7518ES3HB56CFL	332	F1	40.00	1.15	0.90	80.0	11.102	575	9;20
		1200	56HC	.7512ES3E56CFL-S	449	F1	34.00	1.15	1.34	75.5	12.72	208-230/460	9;20
		1200	56HC	.7512ES3H56CFL-S	448	F1	34.00	1.15	1.07	75.5	12.72	575	9;20
		1200	D56C	.7512ES3ED56CFL	449	F1	40.00	1.15	1.48	81.5	12.283	208-230/460	9;20
		1200	D56C	.7512ES3HD56CFL	449	F1	40.00	1.15	1.18	81.5	12.283	575	9;20
1	0.75	3600	56C	00136ES3E56CFL-S	361	F1	28.00	1.15	1.51	74.0	11.933	208-230/460	9;20
		3600	B56C	00136ES3EB56CFL	361	F1	44.00	1.15	1.40	80.0	11.102	208-230/460	9;20
		1800	56C	00118ES3E56CFL-S	345	F1	32.00	1.15	1.66	80.0	12.323	208-230/460	9;20
		1800	56C	00118ES3H56CFL-S	343	F1	32.00	1.15	1.33	80.0	12.323	575	9;20
		1800	D56C	00118ES3ED56CFL	345	F1	46.00	1.15	1.55	80.5	12.283	208-230/460	9;20
		1800	D56C	00118ES3HD56CFL	345	F1	46.00	1.15	1.24	80.5	12.283	575	9;20
		1800	143/5TC	00118EP3ER143TC-S	383	RS	37.00	1.15	1.56	82.5	14.882	208-230/460	9;15;30
		1800	143/5TC	00118ET3ER143TC-S	484	RSP	43.00	1.15	1.47	85.5	14.882	208-230/460	9;15
		1200	56HC	00112ES3E56CFL-S	454	F1	39.00	1.15	1.67	77.0	13.504	208-230/460	9;20
		1200	56HC	00112ES3H56CFL-S	454	F1	39.00	1.15	1.34	77.0	13.504	575	9;20
		1200	F56C	00112ES3EF56CFL	454	F1	46.00	1.15	1.83	81.5	13.464	208-230/460	9;20
		1200	F56C	00112ES3HF56CFL	454	F1	46.00	1.15	1.46	81.5	13.464	575	9;20
		1200	143/5TC	00112EP3ER145TC-S	465	RS	41.00	1.15	1.66	80.0	14.488	208-230/460	9;15;30
		1200	143/5TC	00112ET3ER145TC-S	554	RSP	43.00	1.15	1.58	82.5	14.882	208-230/460	9;15

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

TEFC - Footless - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1.5	1.1	3600	56C	00156ES3E56CFL-S	392	F1	31.00	1.15	1.99	77.0	12.323	208-230/460	9;20
		3600	B56C	00156ES3EB56CFL	392	F1	48.00	1.15	1.96	82.5	11.102	208-230/460	9;20
		3600	143/5TC	00156EP3ER143TC-S	399	RS	36.00	1.15	1.90	82.5	14.882	208-230/460	9;15;30
		3600	143/5TC	00156ET3ER143TC-S	497	RSP	39.00	1.15	1.87	84.0	14.882	208-230/460	9;15
		1800	56HC	00158ES3E56CFL-S	384	F1	36.00	1.15	2.23	81.5	13.11	208-230/460	9;20
		1800	D56C	00158ES3ED56CFL	384	F1	52.00	1.15	2.30	80.0	12.283	208-230/460	9;20
		1800	143/5TC	00158EP3ER145TC-S	388	RS	43.00	1.15	2.16	84.0	14.882	208-230/460	9;15;30
		1800	143/5TC	00158ET3ER145TC-S	504	RSP	43.00	1.15	2.02	86.5	14.882	208-230/460	9;15
		1200	182/4TC	00152EP3ER182TC-S	580	RS	78.00	1.15	2.27	85.5	18.465	208-230/460	9;15;30
		1200	182/4TC	00152ET3ER182TC-S	690	RSP	73.00	1.15	2.22	87.5	17.678	208-230/460	9;15
2	1.5	3600	56HC	00236ES3E56CFL-S	437	F1	36.00	1.15	2.57	81.5	13.114	208-230/460	9;20
		3600	D56C	00236ES3ED56CFL	437	F1	58.00	1.15	2.58	82.5	12.283	208-230/460	9;20
		3600	143/5TC	00236EP3ER145TC-S	451	RS	41.00	1.15	2.55	84.0	14.882	208-230/460	9;15;30
		3600	143/5TC	00236ET3ER145TC-S	539	RSP	45.00	1.15	2.47	85.5	15.275	208-230/460	9;15
		1800	56HC	00218ES3E56CFL-S	414	F1	41.00	1.15	2.85	82.5	13.504	208-230/460	9;20
		1800	F56C	00218ES3EF56CFL	414	F1	61.00	1.15	2.90	82.0	13.464	208-230/460	9;20
		1800	143/5TC	00218EP3ER145TC-S	428	RS	47.00	1.15	2.95	84.0	15.669	208-230/460	9;15;30
		1800	143/5TC	00218ET3ER145TC-S	558	RSP	47.00	1.15	2.72	86.5	15.275	208-230/460	9;15
		1200	182/4TC	00212EP3ER184TC-S	628	RS	88.00	1.15	3.15	86.5	19.233	208-230/460	9;15;30
		1200	182/4TC	00212ET3ER184TC-S	747	RSP	83.00	1.15	3.00	88.5	18.465	208-230/460	9;15
3	2.2	3600	56HC	00336ES3E56CFL-S	507	F1	43.00	1.15	3.76	81.5	13.898	208-230/460	9;20
		3600	56HC	00336ES3H56CFL-S	506	F1	43.00	1.15	3.01	81.5	13.898	575	9;20
		3600	F56C	00336ES3EF56CFL	507	F1	67.00	1.15	3.80	84.0	13.464	208-230/460	9;20
		3600	F56C	00336ES3HF56CFL	507	F1	67.00	1.15	3.04	84.0	13.464	575	9;20
		3600	182/4TC	00336EP3ER182TC-S	546	RS	67.00	1.15	3.80	85.5	17.678	208-230/460	9;15;30
		3600	182/4TC	00336ET3ER182TC-S	698	RSP	71.00	1.15	3.67	86.5	17.678	208-230/460	9;15
		1800	182/4TC	00318EP3ER182TC-S	492	RS	71.00	1.15	4.05	87.5	17.678	208-230/460	9;15;30
		1800	182/4TC	00318ET3ER182TC-S	610	RSP	87.00	1.15	3.81	89.5	19.233	208-230/460	9;15
		1200	213/5TC	00312EP3ER213TC-S	822	RS	112.00	1.15	4.26	87.5	20.827	208-230/460	9;15;30
		1200	213/5TC	00312ET3ER213TC-S	1,028	RSP	142.00	1.15	4.17	89.5	21.220	208-230/460	9;15
5	3.7	3600	182/4TC	00536EP3ER184TC-S	660	RS	76.00	1.15	5.96	87.5	18.071	208-230/460	9;15;30
		3600	182/4TC	00536ET3ER184TC-S	793	RSP	86.00	1.15	5.90	88.5	19.233	208-230/460	9;15
		1800	182/4TC	00518EP3ER184TC-S	577	RS	84.00	1.15	6.55	87.5	19.233	208-230/460	9;15;30
		1800	182/4TC	00518ET3ER184TC-S	706	RSP	79.00	1.15	6.49	89.5	17.894	208-230/460	9;15
		1200	213/5TC	00512EP3ER215TC-S	1,041	RS	134.00	1.15	7.08	87.5	21.220	208-230/460	9;15;30
		1200	213/5TC	00512ET3ER215TC-S	1,206	RSP	156.00	1.15	6.74	89.5	22.008	208-230/460	9;15
7.5	5.5	3600	213/5TC	00736EP3ER213TC-S	901	RS	129.00	1.15	8.76	88.5	21.220	208-230/460	9;15;30
		3600	213/5TC	00736ET3ER213TC-S	1,025	RSP	144.00	1.15	8.67	89.5	22.008	208-230/460	9;15
		1800	213/5TC	00718EP3ER213TC-S	764	RS	134.00	1.15	9.07	89.5	21.220	208-230/460	9;15;30
		1800	213/5TC	00718ET3ER213TC-S	994	RSP	131.00	1.15	9.07	91.7	20.827	208-230/460	9;15
		1200	254/6TC	00712EP3ER254TC-S	1,576	RS	223.00	1.15	10.4	89.5	24.724	208-230/460	9;15;30
		1200	254/6TC	00712ET3ER254TC-S	1,859	RSP	248.00	1.15	9.98	91.0	24.724	208-230/460	9;15

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

TEFC - Footless - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
10	7.5	3600	213/5TC	01036EP3ER215TC-S	1,041	RS	144.00	1.15	11.8	89.5	22.008	208-230/460	9;15;30
		3600	213/5TC	01036ET3ER215TC-S	1,205	RSP	173.00	1.15	11.5	90.2	23.583	208-230/460	9;15
		1800	213/5TC	01018EP3ER215TC-S	901	RS	152.00	1.15	12.1	89.5	22.401	208-230/460	9;15;30
		1800	213/5TC	01018ET3ER215TC-S	1,154	RSP	142.00	1.15	12.2	91.7	21.220	208-230/460	9;15
		1800	213/5TC	01018ET3HR215TC-S	1,154	RSP	142.00	1.15	9.80	91.7	21.220	575	9;15
		1200	254/6TC	01012EP3ER256TC-S	1,713	RS	241.00	1.15	14.0	89.5	24.724	208-230/460	9;15;30
15	11	3600	254/6TC	01536EP3ER254TC-S	1,488	RS	200.00	1.15	18.0	90.2	24.724	208-230/460	9;15;30
		3600	254/6TC	01536ET3ER254TC-S	1,649	RSP	220.00	1.15	17.4	91.0	24.724	208-230/460	9;15
		1800	254/6TC	01518EP3ER254TC-S	1,362	RS	214.00	1.15	18.7	91.0	24.724	208-230/460	9;15;30
		1800	254/6TC	01518ET3ER254TC-S	1,670	RSP	242.00	1.15	18.2	92.4	24.724	208-230/460	9;15
		1800	254/6TC	01518ET3HR254TC-S	1,670	RSP	242.00	1.15	14.6	92.4	24.724	575	9;15
20	15	3600	254/6TC	02036EP3ER256TC-S	1,790	RS	238.00	1.15	23.5	90.2	24.724	208-230/460	9;15;30
		3600	254/6TC	02036ET3ER256TC-S	2,136	RSP	256.00	1.15	22.7	91.0	25.512	208-230/460	9;15
		1800	254/6TC	02018EP3ER256TC-S	1,658	RS	242.00	1.15	24.9	91.0	24.724	208-230/460	9;15;30
		1800	254/6TC	02018ET3ER256TC-S	1,978	RSP	271.00	1.15	24.5	92.4	25.511	208-230/460	9;15

TEFC - C-Face - Foot Mount w/ AEGIS® Ring

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
3	2.2	1800	182/4T	00318ET3E182TC-SG	780	RSP	87	1.15	3.81	89.5	17.894	208-230/460	9;11;34
5	3.7	3600	182/4T	00536ET3E184TC-SG	963	RSP	86	1.15	5.9	88.5	17.894	208-230/460	9;11;34
		1800	182/4T	00518ET3E184TC-SG	876	RSP	79	1.15	6.49	89.5	17.894	208-230/460	9;11;34
7.5	5.5	3600	213/5T	00736ET3E213TC-SG	1,225	RSP	144	1.15	8.67	89.5	20.079	208-230/460	9;11;34
		1800	213/5T	00718ET3E213TC-SG	1,194	RSP	131	1.15	9.07	91.7	18.898	208-230/460	9;11;34
10	7.5	3600	213/5T	01036ET3E215TC-SG	1,405	RSP	173	1.15	11.5	90.2	21.654	208-230/460	9;11;34
		1800	213/5T	01018ET3E215TC-SG	1,354	RSP	142	1.15	12.2	91.7	19.291	208-230/460	9;11;34
15	11	3600	254/6T	01536ET3E254TC-SG	1,929	RSP	220	1.15	17.4	91	22.559	208-230/460	9;11;34
		1800	254/6T	01518ET3E254TC-SG	1,950	RSP	242	1.15	18.2	92.4	22.559	208-230/460	9;11;34
20	15	3600	254/6T	02036ET3E256TC-SG	2,416	RSP	256	1.15	22.7	91	23.346	208-230/460	9;11;34
		1800	254/6T	02018ET3E256TC-SG	2,258	RSP	271	1.15	24.5	92.4	23.346	208-230/460	9;11;34

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

ODP - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3600	56C	.25360S3E56C-S	222	F1B	21	1.35	0.49	64	10.315	208-230/460	9
		3600	56C	.25360T3E56C-S	259	F2B	21	1.35	0.459	65.6	10.315	208-230/460	9
		1800	56C	.25180S3E56C-S	225	F1B	21	1.35	0.57	66	9.921	208-230/460	9
		1800	56C	.25180T3E56C-S	263	F2B	21	1.35	0.533	69.5	9.921	208-230/460	9
		1200	56C	.25120S3E56C-S	275	F1B	22	1.35	0.6	64	10.315	208-230/460	9
		1200	56C	.25120T3E56C-S	316	F2B	22	1.35	0.549	67.5	10.315	208-230/460	9
0.33	0.25	3600	56C	.33360S3E56C-S	231	F1B	21	1.35	0.66	66	10.315	208-230/460	9
		3600	56C	.33360T3E56C-S	270	F2B	21	1.35	0.61	69.5	10.315	208-230/460	9
		1800	56C	.33180S3E56C-S	242	F1B	21	1.35	0.72	68	9.921	208-230/460	9
		1800	56C	.33180T3E56C-S	284	F2B	21	1.35	0.668	73.4	10.315	208-230/460	9
		1200	56C	.33120S3E56C-S	315	F1B	23	1.35	0.76	68	10.315	208-230/460	9
		1200	56C	.33120T3E56C-S	361	F2B	23	1.35	0.698	71.4	10.315	208-230/460	9
0.5	0.37	3600	56C	.50360S3E56C-S	242	F1B	21	1.25	0.95	68	10.315	208-230/460	9
		3600	56C	.50360T3E56C-S	286	F2B	21	1.25	0.811	73.4	10.315	208-230/460	9
		1800	56C	.50180S3E56C-S	274	F1B	22	1.25	0.98	72	10.315	208-230/460	9
		1800	56C	.50180T3E56C-S	324	F2B	22	1.25	0.861	78.2	10.709	208-230/460	9
		1200	56C	.50120S3E56C-S	328	F1B	26	1.25	0.99	72	10.709	208-230/460	9
		1200	56C	.50120T3E56C-S	377	F2B	26	1.25	0.934	75.3	10.709	208-230/460	9
0.75	0.55	3600	56C	.75360S3E56C-S	283	F1B	23	1.25	1.26	72	10.709	208-230/460	9
		3600	56C	.75360T3E56C-S	333	F2B	23	1.25	1.14	76.8	10.709	208-230/460	9
		1800	56C	.75180S3E56C-S	303	F1B	25	1.25	1.34	75.5	10.709	208-230/460	9
		1800	56C	.75180T3E56C-S	358	F2B	25	1.25	1.15	81.1	11.102	208-230/460	9
		1200	56HC	.75120S3E56C-S	354	F1B	31	1.15	1.29	75.5	11.496	208-230/460	9
		1200	56HC	.75120T3E56C-S	412	F2B	31	1.15	1.26	81.7	12.677	208-230/460	9
		1200	D56C	.75120S3ED56C	354	F1B	37	1.15	1.35	70	12.283	208-230/460	9
1	0.75	3600	56C	001360S3E56C-S	321	F1B	24	1.25	1.61	74	10.709	208-230/460	9
		3600	56C	001360T3E56C-S	383	F2B	24	1.25	1.51	77	10.709	208-230/460	9
		1800	56C	001180S3E56C-S	320	F1B	28	1.15	1.8	77	10.709	208-230/460	9
		1800	56C	001180T3E56C-S	378	F2B	28	1.15	1.57	83.5	11.495	208-230/460	9
		1800	143/5TC	001180T3E143TC-S	424	N1S	39	1.15	1.51	85.5	11.575	208-230/460	9
		1800	143/5TC	001180T3H143TC-S	424	N1S	39	1.15	1.21	85.5	11.575	575	9
		1200	56HC	001120S3E56C-S	416	F1B	35	1.15	1.7	77	11.89	208-230/460	9
		1200	56HC	001120T3E56C-S	486	F2B	35	1.15	1.68	82.5	13.071	208-230/460	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

ODP - Foot Mount - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1.5	1.1	3600	56C	00156OS3E56C-S	344	F1B	27	1.15	2.16	77	11.102	208-230/460	9
		3600	56C	00156OT3E56C-S	408	F2B	27	1.15	1.85	84	10.709	208-230/460	9
		3600	143/5TC	00156OT3E143TC-S	476	N1S	34	1.15	1.85	84	11.575	208-230/460	9
		3600	143/5TC	00156OT3H143TC-S	476	N1S	34	1.15	1.48	84	11.575	575	9
		1800	56HC	00158OS3E56C-S	329	F1B	32	1.15	2.3	80	11.496	208-230/460	9
		1800	56HC	00158OT3E56C-S	389	F2B	32	1.15	2.1	86.5	13.071	208-230/460	9
		1800	143/5TC	00158OT3E145TC-S	483	N1S	47	1.15	2.07	86.5	12.362	208-230/460	9
		1800	143/5TC	00158OT3H145TC-S	483	N1S	47	1.15	1.66	86.5	12.362	575	9
2	1.5	3600	56HC	00236OS3E56C-S	355	F1B	32	1.15	2.82	78.5	11.89	208-230/460	9
		3600	56HC	00236OT3E56C-S	464	F2B	32	1.15	2.42	85.5	12.677	208-230/460	9
		3600	143/5TC	00236OT3E145TC-S	521	N1S	42	1.15	2.42	85.5	11.969	208-230/460	9
		3600	143/5TC	00236OT3H145TC-S	521	N1S	42	1.15	1.94	85.5	11.969	575	9
		1800	56HC	00218OS3E56C-S	346	F1B	35	1.15	3.11	78.5	11.89	208-230/460	9
		1800	56HC	00218OT3E56C-S	399	F2B	35	1.15	2.69	86.5	11.102	208-230/460	9
		1800	143/5TC	00218OT3E145TC-S	526	N1S	44	1.15	2.69	86.5	12.362	208-230/460	9
		1800	143/5TC	00218OT3H145TC-S	526	N1S	44	1.15	2.15	86.5	12.362	575	9
		1200	182/4TC	00212OT3E184TC-S	635	N1S	73	1.15	2.95	87.5	14.744	208-230/460	9
		1200	182/4TC	00212OT3H184TC-S	635	N1S	73	1.15	2.36	87.5	14.744	575	9
3	2.2	3600	56HC	00336OS3E56C-S	379	F1B	35	1.15	3.89	81.5	12.283	208-230/460	9
		3600	56HC	00336OT3E56C-S	513	F2B	35	1.15	3.59	85.5	13.071	208-230/460	9
		3600	143/5TC	00336OT3E145TC-S	579	N1S	45	1.15	3.59	85.5	12.362	208-230/460	9
		3600	143/5TC	00336OT3H145TC-S	579	N1S	45	1.15	2.87	85.5	12.362	575	9
		1800	182/4TC	00318OT3E182TC-S	562	N1S	73	1.15	3.86	89.5	15.138	208-230/460	9
		1800	182/4TC	00318OT3H182TC-S	562	N1S	73	1.15	3.09	89.5	15.138	575	9
		1800	182/4TC	00318OT3V182TC-S	562	N1S	73	1.15	4.43	89.5	15.138	200/400	9
		1200	213/5TC	00312OT3E213TC-S	826	N1S	110	1.15	4.16	88.5	16.575	208-230/460	9
		1200	213/5TC	00312OT3H213TC-S	826	N1S	110	1.15	3.33	88.5	16.575	575	9
5	3.7	3600	182/4TC	00536OT3E182TC-S	689	N1S	66	1.15	6.1	86.5	14.764	208-230/460	9
		3600	182/4TC	00536OT3H182TC-S	689	N1S	66	1.15	4.88	86.5	14.764	575	9
		1800	182/4TC	00518OT3E184TC-S	668	N1S	87	1.15	6.33	89.5	16.319	208-230/460	9
		1800	182/4TC	00518OT3H184TC-S	668	N1S	87	1.15	5.06	89.5	16.319	575	9
		1200	213/5TC	00512OT3E215TC-S	1,108	N1S	129	1.15	6.74	89.5	16.969	208-230/460	9
		1200	213/5TC	00512OT3H215TC-S	1,108	N1S	129	1.15	5.39	89.5	16.969	575	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

ODP - Foot Mount - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
7.5	5.5	3600	182/4TC	00736OT3E184TC-S	958	N1S	77	1.15	8.67	88.5	15.138	208-230/460	9
		3600	182/4TC	00736OT3H184TC-S	958	N1S	77	1.15	6.93	88.5	15.138	575	9
		1800	213/5TC	00718OT3E213TC-S	961	N1S	128	1.15	9.14	91	16.575	208-230/460	9
		1800	213/5TC	00718OT3H213TC-S	961	N1S	128	1.15	7.31	91	16.575	575	9
		1800	213/5TC	00718OT3V213TC-S	961	N1S	128	1.15	10.5	91	16.575	200/400	9
		1200	254/6TC	00712OT3E254TC-S	1,535	N1S	231	1.15	10.2	90.2	20.472	208-230/460	9
		1200	254/6TC	00712OT3H254TC-S	1,535	N1S	231	1.15	8.2	90.2	20.472	575	9
10	7.5	3600	213/5TC	01036OT3E213TC-S	1,132	N1S	128	1.15	12	89.5	16.969	208-230/460	9
		3600	213/5TC	01036OT3H213TC-S	1,132	N1S	128	1.15	9.6	89.5	16.969	575	9
		1800	213/5TC	01018OT3E215TC-S	1,153	N1S	149	1.15	12.4	91.7	17.756	208-230/460	9
		1800	213/5TC	01018OT3H215TC-S	1,153	N1S	149	1.15	9.9	91.7	17.756	575	9
		1200	254/6TC	01012OT3E256TC-S	1,785	N1S	254	1.15	13.9	91.7	20.472	208-230/460	9
		1200	254/6TC	01012OT3H256TC-S	1,785	N1S	254	1.15	11.1	91.7	20.472	575	9
15	11	3600	213/5TC	01536OT3E215TC-S	1,543	N1S	143	1.15	17.2	90.2	17.756	208-230/460	9
		3600	213/5TC	01536OT3H215TC-S	1,543	N1S	143	1.15	13.8	90.2	17.756	575	9
		3600	213/5TC	01536OT3V215TC-S	1,543	N1S	143	1.15	19.8	90.2	17.756	200/400	9
		1800	254/6TC	01518OT3E254TC-S	1,545	N1S	220	1.15	18.3	93	20.472	208-230/460	9
		1800	254/6TC	01518OT3H254TC-S	1,545	N1S	220	1.15	14.7	93	20.472	575	9
		1800	254/6TC	01518OT3V254TC-S	1,545	N1S	220	1.15	21.1	93	20.472	200/400	9
20	15	3600	254/6TC	02036OT3E254TC-S	1,828	N1S	196	1.15	23.8	91	20.472	208-230/460	9
		3600	254/6TC	02036OT3H254TC-S	1,828	N1S	196	1.15	19	91	20.472	575	9
		1800	254/6TC	02018OT3E256TC-S	1,900	N1S	243	1.15	24.7	93	20.472	208-230/460	9
		1800	254/6TC	02018OT3H256TC-S	1,900	N1S	243	1.15	19.7	93	20.472	575	9
		1800	254/6TC	02018OT3V256TC-S	1,900	N1S	243	1.15	28.4	93	20.472	200/400	9
25	18.5	3600	254/6TC	02536OT3E256TC-S	2,207	N1S	219	1.15	29.1	91.7	20.472	208-230/460	9
		3600	254/6TC	02536OT3H256TC-S	2,207	N1S	219	1.15	23.3	91.7	20.472	575	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



THREE-PHASE

ODP - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	1800	56C	.25180S3H56CFL-S	226	F1B	21	1.35	0.46	66	9.921	575	9;20
		1800	56C	.25180T3E56CFL-S	263	F2B	21	1.35	0.53	66.0	9.921	208-230/460	9;20
		1800	56C	.25180T3H56CFL-S	263	F2B	21	1.35	0.426	69.5	9.921	575	9;20
0.33	0.25	3600	56C	.33360S3E56CFL-S	231	F1B	21	1.35	0.66	66	10.315	208-230/460	9;20
		3600	56C	.33360T3E56CFL-S	270	F2B	21	1.35	0.61	69.5	10.315	208-230/460	9;20
		1800	56C	.33180S3E56CFL-S	242	F1B	21	1.35	0.72	68	9.921	208-230/460	9;20
		1800	56C	.33180T3E56CFL-S	284	F2B	21	1.35	0.668	73.4	10.315	208-230/460	9;20
		1800	56C	.33180T3H56CFL-S	284	F2B	21	1.35	0.53	73.4	10.315	575	9;20
0.5	0.37	3600	56C	.50360S3E56CFL-S	242	F1B	21	1.25	0.95	68	10.315	208-230/460	9;20
		3600	56C	.50360T3E56CFL-S	286	F2B	21	1.25	0.811	73.4	10.315	208-230/460	9;20
		1800	56C	.50180S3E56CFL-S	274	F1B	22	1.25	0.98	72	10.315	208-230/460	9;20
		1800	56C	.50180S3H56CFL-S	274	F1B	22	1.25	0.78	72	10.315	575	9;20
		1800	56C	.50180T3E56CFL-S	324	F2B	22	1.25	0.861	78.2	10.709	208-230/460	9;20
		1800	56C	.50180T3H56CFL-S	324	F2B	22	1.25	0.689	78.2	10.709	575	9;20
0.75	0.55	3600	56C	.75360S3E56CFL-S	283	F1B	23	1.25	1.26	72	10.709	208-230/460	9;20
		3600	56C	.75360T3E56CFL-S	333	F2B	23	1.25	1.14	76.8	10.709	208-230/460	9;20
		1800	56C	.75180S3E56CFL-S	303	F1B	25	1.25	1.34	75.5	10.709	208-230/460	9;20
		1800	56C	.75180S3H56CFL-S	276	F1B	25	1.25	1.07	75.5	10.709	575	9;20
		1800	56C	.75180T3E56CFL-S	358	F2B	25	1.25	1.15	81.1	11.102	208-230/460	9;20
		1800	56C	.75180T3H56CFL-S	358	F2B	25	1.25	0.92	81.1	11.102	575	9;20
1	0.75	3600	56C	001360S3E56CFL-S	301	F1B	24	1.25	1.61	74	10.709	208-230/460	9;20
		3600	56C	001360T3E56CFL-S	383	F2B	24	1.25	1.51	77	10.709	208-230/460	9;20
		1800	56C	001180S3E56CFL-S	320	F1B	28	1.15	1.8	77	10.709	208-230/460	9;20
		1800	56C	001180S3H56CFL-S	320	F1B	28	1.15	1.44	77	10.709	575	9;20
		1800	56C	001180T3E56CFL-S	378	F2B	28	1.15	1.57	83.5	11.495	208-230/460	9;20
		1800	56C	001180T3H56CFL-S	378	F2B	28	1.15	1.26	83.5	11.495	575	9;20
1.5	1.1	3600	56C	001560S3E56CFL-S	344	F1B	27	1.15	2.16	77	11.102	208-230/460	9;20
		3600	56C	001560T3E56CFL-S	408	F2B	27	1.15	1.85	84	10.709	208-230/460	9;20
		1800	56HC	001580S3E56CFL-S	329	F1B	32	1.15	2.3	80	11.496	208-230/460	9;20
		1800	56HC	001580S3H56CFL-S	329	F1B	32	1.15	1.84	80	11.496	575	9;20
		1800	56HC	001580T3E56CFL-S	389	F2B	32	1.15	2.1	86.5	13.071	208-230/460	9;20
		1800	56HC	001580T3H56CFL-S	389	F2B	32	1.15	1.68	86.5	13.071	575	9;20
2	1.5	3600	56HC	002360S3E56CFL-S	355	F1B	32	1.15	2.82	78.5	11.89	208-230/460	9;20
		3600	56HC	002360T3E56CFL-S	464	F2B	32	1.15	2.42	85.5	12.677	208-230/460	9;20
		1800	56HC	002180S3H56CFL-S	346	F1B	35	1.15	2.49	78.5	11.89	575	9;20
		1800	56HC	002180T3H56CFL-S	399	F2B	35	1.15	2.15	86.5	11.102	575	9;20
3	2.2	3600	56HC	003360S3E56CFL-S	379	F1B	35	1.15	3.89	81.5	12.283	208-230/460	9;20
		3600	56HC	003360T3E56CFL-S	513	F2B	35	1.15	3.59	85.5	13.071	208-230/460	9;20

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

THREE-PHASE

ODP - Foot Mount w/ AEGIS® Ring

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
3	2.2	1800	182/4T	00318OT3E182TC-SG	732	N1S	73	1.15	3.86	89.5	15.138	208-230/460	9;34
5	3.7	3600	182/4T	00536OT3E182TC-SG	859	N1S	66	1.15	6.1	86.5	14.764	208-230/460	9;34
		1800	182/4T	00518OT3E184TC-SG	838	N1S	87	1.15	6.33	89.5	16.319	208-230/460	9;34
7.5	5.5	3600	182/4T	00736OT3E184TC-SG	1,128	N1S	77	1.15	8.67	88.5	15.138	208-230/460	9;34
		1800	213/5T	00718OT3E213TC-SG	1,161	N1S	128	1.15	9.14	91	16.575	208-230/460	9;34
10	7.5	3600	213/5T	01036OT3E213TC-SG	1,332	N1S	128	1.15	12	89.5_	16.969	208-230/460	9;34
		1800	213/5T	01018OT3E215TC-SG	1,353	N1S	149	1.15	12.4	91.7	17.756	208-230/460	9;34
15	11	3600	213/5T	01536OT3E215TC-SG	1,743	N1S	143	1.15	17.2	90.2	17.756	208-230/460	9;34
		1800	254/6T	01518OT3E254TC-SG	1,825	N1S	220	1.15	18.3	93	20.472	208-230/460	9;34
20	15	3600	254/6T	02036OT3E254TC-SG	2,108	N1S	196	1.15	23.8	91	20.472	208-230/460	9;34
		1800	254/6T	02018OT3E256TC-SG	2,180	N1S	243	1.15	24.7	93	20.472	208-230/460	9;34
25	18.5	3600	254/6T	02536OT3E256TC-SG	2,487	N1S	219	1.15	29.1	91.7	20.472	208-230/460	9;34

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



SINGLE-PHASE

TEFC

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3600	B56	**.2536ES1BB56**	**257**	F1	31.00	1.15	2.30	50.0	11.102	115/208-230	9
		1800	B56	**.2518ES1BB56**	**267**	F1	33.00	1.15	2.35	57.7	11.102	115/208-230	9
0.33	0.25	3600	B56	**.3336ES1BB56**	**267**	F1	36.00	1.15	2.85	53.0	11.102	115/208-230	9
		1800	B56	**.3318ES1BB56**	**283**	F1	36.00	1.15	2.80	61.0	11.102	115/208-230	9
0.50	0.37	3600	B56	**.5036ES1BB56**	**284**	F1	40.00	1.15	3.80	58.0	11.102	115/208-230	9
		3600	B56	**.5036ES1BOLB56**	**316**	F1	40.00	1.15	3.80	58.0	11.102	115/208-230	4;9
		1800	B56	**.5018ES1BB56**	**312**	F1	41.00	1.15	3.70	66.5	11.102	115/208-230	9
		1800	W56	**.5018ES1BW56-S**	**312**	F1	41.00	1.15	4	64	11.894	115/208-230	9
		1200	D56	**.5012ES1BD56**	**512**	F1	41.00	1.15	3.60	71.0	12.283	115/208-230	9
0.75	0.55	3600	B56	**.7536ES1BB56**	**297**	F1	41.00	1.15	5.20	64.0	11.102	115/208-230	9
		3600	B56	**.7536ES1BOLB56**	**329**	F1	41.00	1.15	5.20	64.0	11.102	115/208-230	4;9
		1800	B56	**.7518ES1BB56**	**348**	F1	46.00	1.15	5.30	68.5	11.102	115/208-230	9
		1200	F56H	**.7512ES1BF56**	**648**	F1	58.00	1.15	5.00	71.0	13.464	115/208-230	9
1	0.75	3600	D56	**00136ES1BD56**	**376**	F1	46.00	1.15	6.40	67.0	12.283	115/208-230	9
		3600	D56	**00136ES1BOLD56**	**408**	F1	46.00	1.15	6.40	67.0	12.283	115/208-230	4;9
		1800	D56	**00118ES1BD56**	**401**	F1	52.00	1.15	7.00	70.3	12.283	115/208-230	9
1.5	1.1	3600	D56	**00156ES1BD56**	**432**	F1	56.00	1.15	8.55	70.0	12.283	115/208-230	9
		3600	D56	**00156ES1BOLD56**	**463**	F1	56.00	1.15	8.55	70.0	12.283	115/208-230	4;9
		1800	F56H	**00158ES1BF56**	**456**	F1	58.00	1.15	8.70	76.5	13.464	115/208-230	9
2	1.5	3600	F56H	**00236ES1BF56**	**561**	F1	65.00	1.15	10.0	74.0	13.464	115/208-230	9
		3600	F56H	**00236ES1BOLF56**	**592**	F1	65.00	1.15	10.0	74.0	13.464	115/208-230	4;9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



SINGLE-PHASE

ODP

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.12	0.09	1800	48	.12180S1B48-S	201	F1B	17.00	1.4	1.5	50	9.492	115/208-230	9
		1800	B48	.12180S1BB48	201	F1B	17.00	1.40	1.60	48.1	9.252	115/208-230	9
0.16	0.12	3600	48	.16360S1B48-S	216	F1B	17.00	1.35	1.4	53	9.492	115/208-230	9
		3600	B48	.16360S1BB48	216	F1B	17.00	1.35	1.55	49.9	9.252	115/208-230	9
		1800	48	.16180S1B48-S	208	F1B	17.00	1.35	1.7	53	9.492	115/208-230	9
		1800	B48	.16180S1BB48	208	F1B	17.00	1.35	1.85	50.3	9.252	115/208-230	9
		1800	B48	.16180S1BSPB48	224	F1B	19.00	1.35	1.90	49.9	9.252	115/208-230	9;16
0.25	0.18	3600	56	.25360S1B56	220	F1B	19.00	1.35	2.15	54.7	9.646	115/208-230	9
		3600	W56	.25360T1BW56-S	253	F2B	19.00	1.35	1.25	66.6	9.866	115/208-230	9
		3600	B48	.25360S1BB48	220	F1B	19.00	1.35	2.15	54.7	9.252	115/208-230	9
		3600	48	.25360T1B48-S	253	F2B	19.00	1.35	1.25	66.6	9.492	115/208-230	9
		1800	56	.25180S1B56	209	F1B	19.00	1.35	2.65	55.9	9.646	115/208-230	9
		1800	B48	.25180S1BB48	209	F1B	19.00	1.35	2.65	55.9	9.252	115/208-230	9
		1800	B48	.25180S1BSPB48	240	F1B	20.00	1.35	2.40	59.5	9.252	115/208-230	9;16
		1800	48	.25180T1B48-S	241	F2B	19.00	1.35	1.6	68.5	9.492	115/208-230	9
		1800	W56	.25180T1BW56-S	241	F2B	19.00	1.35	1.6	68.5	9.866	115/208-230	9
0.33	0.25	3600	C48	.33360S1BC48	222	F1B	22.00	1.35	2.85	57.6	10.197	115/208-230	9
		3600	48	.33360T1B48-S	256	F2B	22.00	1.35	1.6	70.5	9.886	115/208-230	9
		3600	C56	.33360S1BC56	222	F1B	22.00	1.35	2.85	57.6	10.551	115/208-230	9
		3600	W56	.33360T1BW56-S	257	F2B	22.00	1.35	1.6	70.5	10.26	115/208-230	9
		1800	C48	.33180S1BC48	237	F1B	22.00	1.35	3.11	58.6	10.197	115/208-230	9
		1800	C48	.33180S1BSPC48	258	F1B	22.00	1.35	3.13	60.0	10.197	115/208-230	9;16
		1800	48	.33180T1B48-S	275	F2B	22.00	1.35	2.1	72.4	9.886	115/208-230	9
		1800	C56	.33180S1BC56	237	F1B	22.00	1.35	3.30	58.2	10.551	115/208-230	9
		1800	W56	.33180T1BW56-S	275	F2B	22.00	1.35	2.1	72.4	10.26	115/208-230	9
0.50	0.37	3600	C48	.50360S1BC48	237	F1B	24.00	1.25	3.60	64.4	10.197	115/208-230	9
		3600	48	.50360T1B48-S	276	F2B	24.00	1.25	2.4	72.4	9.886	115/208-230	9
		3600	C56	.50360S1BC56	242	F1B	24.00	1.25	3.60	64.4	10.551	115/208-230	9
		3600	C56	.50360S1BCDC56	224	C1S	24.00	1.00	3.30	63.0	10.551	115/208-230	1;4;6;9
		3600	W56	.50360T1BW56-S	-	F2B	24.00	1.25	2.4	72.4	10.26	115/208-230	9
		1800	C48	.50180S1BC48	273	F1B	24.00	1.25	4.25	61.7	10.197	115/208-230	9
		1800	C48	.50180S1BSPC48	279	F1B	24.00	1.25	4.00	63.5	10.197	115/208-230	9;16
		1800	48	.50180T1B48-S	318	F2B	24.00	1.25	2.75	76.2	10.28	115/208-230	9
		1800	C56	.50180S1BC56	264	F1B	24.00	1.25	4.25	61.7	10.551	115/208-230	9
		1800	W56	.50180T1BW56-S	307	F2B	24.00	1.25	2.75	76.2	10.654	115/208-230	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



SINGLE-PHASE

ODP - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.75	0.55	3600	B56	.75360S1BB56	274	F1B	32.00	1.25	5.25	67.2	11.102	115/208-230	9
		3600	56	.75360T1B56-S	320	F2B	32.00	1.25	3.4	76.2	11.89	115/208-230	9
		3600	C56	.75360S1BCDC56	237	C1S	32.00	1.00	4.60	66.0	10.551	115/208-230	1;4;6;9
		1800	D56	.75180S1BD56	328	F1B	36.00	1.25	5.40	66.7	12.283	115/208-230	9
		1800	56	.75180T1B56-S	387	F2B	36.00	1.25	3.4	81.8	11.89	115/208-230	9
1	0.75	3600	B56	00136OS1BCDB56	278	C1S	36.00	1.00	6.10	67.0	11.102	115/208-230	1;4;6;9
		3600	D56	00136OS1BD56	296	F1B	36.00	1.25	6.80	66.3	12.283	115/208-230	9
		3600	56	00136OT1B56-S	347	F2B	36.00	1.25	4.3	80.4	11.89	115/208-230	9
		1800	D56	00118OS1BD56	355	F1B	39.00	1.15	7.00	71.4	12.283	115/208-230	9
		1800	D56	00118OS1BOD56	370	F1B	39.00	1.15	7.00	71.4	12.283	115/208-230	9
		1800	56	00118OT1B56-S	421	F2B	39.00	1.15	4.5	82.6	12.677	115/208-230	9
		1800	56	00118OT1BO56-S	438	F2B	39.00	1.15	4.50	82.6	12.677	115/208-230	9
1.5	1.1	3600	D56	00156OS1BCDD56	311	C1S	40.00	1.00	8.40	68.0	12.283	115/208-230	1;4;6;9
		3600	D56	00156OS1BD56	333	F1B	40.00	1.15	8.90	70.0	12.283	115/208-230	9
		3600	56	00156OT1B56-S	393	F2B	40.00	1.15	6.2	81.5	12.284	115/208-230	9
		1800	F56H	00158OS1BCH56H	438	F1B	37.00	1.15	10.2	71.3	13.464	115/208-230	9
		1800	F56H	00158OS1BF56	438	F1B	37.00	1.15	10.2	71.3	13.464	115/208-230	9
		1800	F56H	00158OS1BOF56	453	F1B	51.00	1.15	10.2	71.3	13.464	115/208-230	3;9
		1800	56H	00158OT1B56-S	523	F2B	37.00	1.15	6.8	83.8	13.071	115/208-230	9
		1800	56H	00158OT1BO56-S	-	F2B	51.00	1.15	6.8	83.8	13.071	115/208-230	3;9
2	1.5	3600	D56	00236OS1BCDD56	372	C1S	41.00	1.00	11.0	70.0	12.283	115/208-230	1;4;6;9
		3600	F56H	00236OS1BF56	409	F1B	41.00	1.15	11.0	77.9	13.464	115/208-230	9
		3600	56H	00236OT1B56-S	485	F2B	41.00	1.15	8.4	82.9	12.677	115/208-230	9
		1800	G56H	00218OS1BG56	522	F1B	46.00	1.00	14.0	71.4	13.858	115/208-230	1;9
		1800	56H	00218OT1B56-S	626	F2B	46.00	1.15	9.3	84.5	13.858	115/208-230	1;9
3	2.2	3600	F56H	00336OS1BCDF56	432	C1S	44.00	1.00	14.7	77.0	13.464	115/208-230	1;4;6;9
		3600	G56H	00336OS1BG56	475	F1B	44.00	1.00	15.5	78.0	13.858	115/208-230	1;9
		3600	56H	00336OT1B56-S	568	F2B	44.00	1.15	12.2	84.1	13.858	115/208-230	1;9
4	3.0	3600	G56HZ	00436OS1DCDG56HZ	453	C1S	47.00	1.15	16.5	82.5	14.234	230	4;5;6;9
		3600	G56H	00536OS1CCDG56	458	C1S	52.00	1.00	19.0	85.0	13.858	208-230	1;4;6;9
		3600	G56HZ	00536OS1CCDG56HZ	481	C1S	52.00	1.00	19.0	85.0	14.234	208-230	1;4;5;6;9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



SINGLE-PHASE

ODP - Resilient Base

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	1800	B48	**.25180S1BRB0B48**	**274**	F1B	22.00	1.35	2.40	59.5	10.632	115/208-230	3;9;13;16
0.33	0.25	1800	C48	**.33180S1BRB0C48**	**284**	F1B	26.00	1.35	3.13	60.0	10.039	115/208-230	3;9;13;16
		1800	C56	**.33180S1BRB0C56**	**288**	F1B	22.00	1.35	3.13	60.0	11.593	115/208-230	3;9;13;16
		1800	C56	**.33180S1PRB0C56**	**288**	F1B	22.00	1.35	2.58	58.6	11.593	277	3;9;13
0.50	0.37	1800	C48	**.50180S1BRB0C48**	**311**	F1B	28.00	1.25	4.00	63.5	10.039	115/208-230	3;9;13;16
		1800	C56	**.50180S1BRB0C56**	**316**	F1B	24.00	1.25	4.00	63.5	11.593	115/208-230	3;9;13;16
		1800	C56	**.50180S1PRB0C56**	**316**	F1B	24.00	1.35	3.34	63.2	11.593	277	3;9;13
0.75	0.55	1800	D56	**.75180S1BRB0D56**	**379**	F1B	36.00	1.25	5.40	66.7	12.992	115/208-230	3;9;13
		1800	D56	**.75180S1PRB0D56**	**379**	F1B	36.00	1.25	4.48	66.7	12.992	277	3;9;13
1	0.75	1800	D56	**001180S1BRB0D56**	**408**	F1B	39.00	1.15	7.00	71.4	12.992	115/208-230	3;9;13
		1800	D56	**001180S1PRB0D56**	**408**	F1B	39.00	1.15	5.81	71.4	12.992	277	3;9;13
1.5	1.1	3600	D56	**001560S1BRB0D56**	**386**	F1B	40.00	1.15	8.90	70.0	12.992	115/208-230	3;9;13
		3600	56	**001560T1BRB056-S**	**450**	F2B	40.00	1.15	6.2	70.0	12.992	115/208-230	3;9;13
		1800	D56	**001580S1BRB0D56**	**491**	F1B	37.00	1.15	9.70	73.0	12.992	115/208-230	3;9;13
		1800	56	**001580T1BRB056-S**	**510**	F2B	37.00	1.15	6.8	83.8	13.071	115/208-230	3;9;13

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



THREE-PHASE

TEFC

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3600	56	.2536ES3E56-S	237	F1	22.00	1.15	0.46	57.5	11.142	208-230/460	9
		1800	56	.2518ES3E56-S	249	F1	23.00	1.15	0.52	70.0	11.146	208-230/460	9
0.33	0.25	3600	56	.3336ES3E56-S	249	F1	22.00	1.15	0.60	62.0	11.142	208-230/460	9
		1800	56	.3318ES3E56-S	253	F1	24.00	1.15	0.62	74.0	11.535	208-230/460	9
0.50	0.37	3600	56	.5036ES3E56-S	258	F1	24.00	1.15	0.84	68.0	11.539	208-230/460	9
		1800	56	.5018ES3E56-S	287	F1	26.00	1.15	0.86	77.0	11.539	208-230/460	9
		1800	56	.5018ES3H56-S	288	F1	26.00	1.15	0.69	77.0	11.539	575	9
		1200	56	.5012ES3E56-S	417	F1	30.00	1.15	0.99	72.0	12.323	208-230/460	9
0.75	0.55	3600	56	.7536ES3E56-S	287	F1	25.00	1.15	1.13	72.0	11.535	208-230/460	9
		3600	56	.7536ES3H56-S	288	F1	25.00	1.15	0.90	72.0	11.535	575	9
		3600	B56	.7536ES3EB56	287	F1	40.00	1.15	1.10	77.0	11.102	208-230/460	9
		1800	56	.7518ES3E56-S	311	F1	27.00	1.15	1.22	78.5	11.929	208-230/460	9
		1200	56H	.7512ES3E56-S	427	F1	34.00	1.15	1.34	75.5	12.72	208-230/460	9
1	0.75	3600	56	00136ES3E56-S	338	F1	28.00	1.15	1.51	74.0	11.933	208-230/460	9
		3600	56	00136ES3H56-S	338	F1	28.00	1.15	1.21	74.0	11.933	575	9
		1800	56	00118ES3E56-S	321	F1	32.00	1.15	1.66	80.0	12.323	208-230/460	9
		1800	56	00118ES3H56-S	322	F1	32.00	1.15	1.33	80.0	12.323	575	9
		1800	143/5T	00118ET3E143T-S	459	RSP	43.00	1.15	1.47	85.5	13.583	208-230/460	9
		1200	56H	00112ES3E56-S	432	F1	39.00	1.15	1.67	77.0	13.504	208-230/460	9
		1200	143/5T	00112ET3E145T-S	529	RSP	43.00	1.15	1.58	82.5	13.583	208-230/460	9
		1200	143/5T	00112ET3H145T-S	529	RSP	43.00	1.15	1.27	82.5	13.583	575	9
1.5	1.1	3600	56	00156ES3E56-S	370	F1	31.00	1.15	1.99	77.0	12.323	208-230/460	9
		3600	143/5T	00156ET3E143T-S	473	RSP	39.00	1.15	1.87	84.0	13.189	208-230/460	9
		1800	56H	00158ES3E56-S	362	F1	36.00	1.15	2.23	81.5	13.11	208-230/460	9
		1800	143/5T	00158ET3E145T-S	480	RSP	43.00	1.15	2.02	86.5	13.583	208-230/460	9
		1800	143/5T	00158ET3H145T-S	480	RSP	43.00	1.15	1.62	86.5	13.583	575	9
		1200	182/4T	00152ET3E182T-S	656	RSP	73.00	1.15	2.22	87.5	16.339	208-230/460	9
		1200	182/4T	00152ET3H182T-S	656	RSP	73.00	1.15	1.78	87.5	16.339	575	9
2	1.5	3600	56H	00236ES3E56-S	414	F1	36.00	1.15	2.57	81.5	13.114	208-230/460	9
		3600	143/5T	00236ET3E145T-S	514	RSP	45.00	1.15	2.47	85.5	13.976	208-230/460	9
		3600	143/5T	00236ET3H145T-S	514	RSP	45.00	1.15	1.98	85.5	13.976	575	9
		1800	56H	00218ES3E56-S	392	F1	41.00	1.15	2.85	82.5	13.504	208-230/460	9
		1800	143/5T	00218ET3E145T-S	533	RSP	47.00	1.15	2.72	86.5	13.976	208-230/460	9
		1800	143/5T	00218ET3H145T-S	533	RSP	47.00	1.15	2.18	86.5	13.976	575	9
		1200	182/4T	00212ET3E184T-S	713	RSP	83.00	1.15	3.00	88.5	17.126	208-230/460	9
		1200	182/4T	00212ET3H184T-S	713	RSP	83.00	1.15	2.40	88.5	17.126	575	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

TEFC - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
3	2.2	3600	56H	00336ES3E56-S	484	F1	43.00	1.15	3.76	81.5	13.898	208-230/460	9
		3600	182/4T	00336ET3E182T-S	665	RSP	71.00	1.15	3.67	86.5	16.339	208-230/460	9
		3600	182/4T	00336ET3H182T-S	665	RSP	71.00	1.15	2.94	86.5	16.339	575	9
		1800	182/4T	00318ET3E182T-S	577	RSP	87.00	1.15	3.81	89.5	17.894	208-230/460	9
		1800	182/4T	00318ET3H182T-S	577	RSP	87.00	1.15	3.05	89.5	17.894	575	9
		1200	213/5T	00312ET3E213T-S	983	RSP	142.00	1.15	4.17	89.5	19.291	208-230/460	9
		1200	213/5T	00312ET3H213T-S	983	RSP	142.00	1.15	3.34	89.5	19.291	575	9
5	3.7	3600	182/4T	00536ET3E184T-S	760	RSP	86.00	1.15	5.90	88.5	17.894	208-230/460	9
		3600	182/4T	00536ET3H184T-S	760	RSP	86.00	1.15	4.72	88.5	17.894	575	9
		1800	182/4T	00518ET3E184T-S	672	RSP	79.00	1.15	6.49	89.5	17.894	208-230/460	9
		1800	182/4T	00518ET3H184T-S	672	RSP	79.00	1.15	5.19	89.5	17.894	575	9
		1200	213/5T	00512ET3E215T-S	1,160	RSP	156.00	1.15	6.74	89.5	20.079	208-230/460	9
		1200	213/5T	00512ET3H215T-S	1,160	RSP	156.00	1.15	5.39	89.5	20.079	575	9
7.5	5.5	3600	213/5T	00736ET3E213T-S	980	RSP	144.00	1.15	8.67	89.5	20.079	208-230/460	9
		3600	213/5T	00736ET3H213T-S	980	RSP	144.00	1.15	6.93	89.5	20.079	575	9
		1800	213/5T	00718ET3E213T-S	948	RSP	131.00	1.15	9.07	91.7	18.898	208-230/460	9
		1800	213/5T	00718ET3H213T-S	948	RSP	131.00	1.15	7.26	91.7	18.898	575	9
		1200	254/6T	00712ET3E254T-S	1,799	RSP	248.00	1.15	9.98	91.0	22.559	208-230/460	9
		1200	254/6T	00712ET3H254T-S	1,799	RSP	248.00	1.15	7.99	91.0	22.559	575	9
10	7.5	3600	213/5T	01036ET3E215T-S	1,160	RSP	173.00	1.15	11.5	90.2	21.654	208-230/460	9
		3600	213/5T	01036ET3H215T-S	1,160	RSP	173.00	1.15	9.20	90.2	21.654	575	9
		1800	213/5T	01018ET3E215T-S	1,110	RSP	142.00	1.15	12.2	91.7	19.291	208-230/460	9
		1800	213/5T	01018ET3H215T-S	1,110	RSP	142.00	1.15	9.80	91.7	19.291	575	9
		1200	254/6T	01012ET3E256T-S	2,088	RSP	277.00	1.15	13.8	91.0	23.346	208-230/460	9
		1200	254/6T	01012ET3H256T-S	2,088	RSP	277.00	1.15	11.0	91.0	23.346	575	9
15	11	3600	254/6T	01536ET3E254T-S	1,589	RSP	220.00	1.15	17.4	91.0	22.559	208-230/460	9
		3600	254/6T	01536ET3H254T-S	1,589	RSP	220.00	1.15	14.0	91.0	22.559	575	9
		1800	254/6T	01518ET3E254T-S	1,610	RSP	242.00	1.15	18.2	92.4	22.559	208-230/460	9
		1800	254/6T	01518ET3H254T-S	1,610	RSP	242.00	1.15	14.6	92.4	22.559	575	9
20	15	3600	254/6T	02036ET3E256T-S	2,076	RSP	256.00	1.15	22.7	91.0	23.346	208-230/460	9
		3600	254/6T	02036ET3H256T-S	2,076	RSP	256.00	1.15	18.2	91.0	23.346	575	9
		1800	254/6T	02018ET3E256T-S	1,918	RSP	271.00	1.15	24.5	92.4	23.346	208-230/460	9
		1800	254/6T	02018ET3H256T-S	1,918	RSP	271.00	1.15	19.6	92.4	23.346	575	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

THREE-PHASE

TEFC - AEGIS® Ring

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5T	00118ET3E143T-SG	599	RSP	43.00	1.15	1.47	85.5	13.583	208-230/460	9;11;34
		1800	143/5T	00118ET3H143T-SG	599	RSP	43.00	1.15	1.18	85.5	13.583	575	9;34
		1800	143/5T	00118ET3V143T-SG	599	RSP	43.00	1.15	1.69	85.5	13.583	200/400	9;34
		1200	143/5T	00112ET3E145T-SG	669	RSP	43.00	1.15	1.58	82.5	13.583	208-230/460	9;34
1.5	1.1	3600	143/5T	00156ET3E143T-SG	613	RSP	39.00	1.15	1.87	84.0	13.189	208-230/460	9;11;34
		1800	143/5T	00158ET3E145T-SG	620	RSP	43.00	1.15	2.02	86.5	13.583	208-230/460	9;11;34
		1800	143/5T	00158ET3H145T-SG	620	RSP	43.00	1.15	1.62	86.5	13.583	575	9;34
		1800	143/5T	00158ET3V145T-SG	620	RSP	43.00	1.15	2.32	86.5	13.583	200/400	9;34
		1200	182/4T	00152ET3E182T-SG	826	RSP	73.00	1.15	2.22	87.5	16.339	208-230/460	9;34
2	1.5	3600	143/5T	00236ET3E145T-SG	654	RSP	45.00	1.15	2.47	85.5	13.976	208-230/460	9;11;34
		3600	143/5T	00236ET3H145T-SG	654	RSP	45.00	1.15	1.98	85.5	13.976	575	9;11;34
		1800	143/5T	00218ET3E145T-SG	673	RSP	47.00	1.15	2.72	86.5	13.976	208-230/460	9;11;34
		1800	143/5T	00218ET3H145T-SG	673	RSP	47.00	1.15	2.18	86.5	13.976	575	9;34
		1800	143/5T	00218ET3V145T-SG	673	RSP	47.00	1.15	3.13	86.5	13.976	200/400	9;34
		1200	182/4T	00212ET3E184T-SG	883	RSP	83.00	1.15	3.00	88.5	17.126	208-230/460	9;34
3	2.2	3600	182/4T	00336ET3E182T-SG	835	RSP	71.00	1.15	3.67	86.5	16.339	208-230/460	9;11;34
		3600	182/4T	00336ET3H182T-SG	835	RSP	71.00	1.15	2.94	86.5	16.339	575	9;11;34
		1800	182/4T	00318ET3E182T-SG	747	RSP	87.00	1.15	3.81	89.5	17.894	208-230/460	9;11;34
		1800	182/4T	00318ET3H182T-SG	747	RSP	87.00	1.15	3.05	89.5	17.894	575	9;34
		1800	182/4T	00318ET3V182T-SG	747	RSP	87.00	1.15	4.38	89.5	17.894	200/400	9;34
		1200	213/5T	00312ET3E213T-SG	1,183	RSP	142.00	1.15	4.17	89.5	19.291	208-230/460	9;34
5	3.7	3600	182/4T	00536ET3E184T-SG	930	RSP	86.00	1.15	5.90	88.5	17.894	208-230/460	9;11;34
		3600	182/4T	00536ET3H184T-SG	930	RSP	86.00	1.15	4.72	88.5	17.894	575	9;11;34
		1800	182/4T	00518ET3E184T-SG	842	RSP	79.00	1.15	6.49	89.5	17.894	208-230/460	9;11;34
		1800	182/4T	00518ET3H184T-SG	842	RSP	79.00	1.15	5.19	89.5	17.894	575	9;34
		1800	182/4T	00518ET3V184T-SG	842	RSP	79.00	1.15	7.46	89.5	17.894	200/400	9;34
		1200	213/5T	00512ET3E215T-SG	1,360	RSP	156.00	1.15	6.74	89.5	20.079	208-230/460	9;34
7.5	5.5	3600	213/5T	00736ET3E213T-SG	1,180	RSP	144.00	1.15	8.67	89.5	20.079	208-230/460	9;11;34
		3600	213/5T	00736ET3H213T-SG	1,180	RSP	144.00	1.15	6.93	89.5	20.079	575	9;11;34
		1800	213/5T	00718ET3E213T-SG	1,148	RSP	131.00	1.15	9.07	91.7	18.898	208-230/460	9;11;34
		1800	213/5T	00718ET3H213T-SG	1,148	RSP	131.00	1.15	7.26	91.7	18.898	575	9;34
		1800	213/5T	00718ET3V213T-SG	1,148	RSP	131.00	1.15	10.4	91.7	18.898	200/400	9;34
		1200	254/6T	00712ET3E254T-SG	2,079	RSP	248.00	1.15	9.98	91.0	22.559	208-230/460	9;34
10	7.5	3600	213/5T	01036ET3E215T-SG	1,360	RSP	173.00	1.15	11.5	90.2	21.654	208-230/460	9;11;34
		3600	213/5T	01036ET3H215T-SG	1,360	RSP	173.00	1.15	9.20	90.2	21.654	575	9;11;34
		1800	213/5T	01018ET3E215T-SG	1,310	RSP	142.00	1.15	12.2	91.7	19.291	208-230/460	9;11;34
		1800	213/5T	01018ET3H215T-SG	1,310	RSP	142.00	1.15	9.76	91.7	19.291	575	9;34
		1800	213/5T	01018ET3V215T-SG	1,310	RSP	142.00	1.15	14.0	91.7	19.291	200/400	9;34
		1200	254/6T	01012ET3E256T-SG	2,368	RSP	277.00	1.15	13.8	91.0	23.346	208-230/460	9;34
		1200	254/6T	01012ET3H256T-SG	2,368	RSP	277.00	1.15	11.0	91.0	23.346	575	9;34

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

TEFC - AEGIS® Ring - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
15	11	3600	254/6T	**01536ET3E254T-SG**	**1,869**	RSP	220.00	1.15	17.4	91.0	22.559	208-230/460	9;11;34
		3600	254/6T	**01536ET3H254T-SG**	**1,869**	RSP	220.00	1.15	14.0	91.0	22.559	575	9;11;34
		1800	254/6T	**01518ET3E254T-SG**	**1,890**	RSP	242.00	1.15	18.2	92.4	22.559	208-230/460	9;11;34
		1800	254/6T	**01518ET3H254T-SG**	**1,890**	RSP	242.00	1.15	14.6	92.4	22.559	575	9;34
		1800	254/6T	**01518ET3V254T-SG**	**1,890**	RSP	242.00	1.15	20.9	92.4	22.559	200/400	9;34
20	15	3600	254/6T	**02036ET3E256T-SG**	**2,356**	RSP	256.00	1.15	22.7	91.0	23.346	208-230/460	9;11;34
		3600	254/6T	**02036ET3H256T-SG**	**2,356**	RSP	256.00	1.15	18.2	91.0	23.346	575	9;11;34
		1800	254/6T	**02018ET3E256T-SG**	**2,198**	RSP	271.00	1.15	24.5	92.4	23.346	208-230/460	9;11;34
		1800	254/6T	**02018ET3H256T-SG**	**2,198**	RSP	271.00	1.15	19.6	92.4	23.346	575	9;34
		1800	254/6T	**02018ET3V256T-SG**	**2,198**	RSP	271.00	1.15	28.2	92.4	23.346	200/400	9;34



THREE-PHASE

ODP

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3600	56	.25360S3E56-S	201	F1B	21.00	1.35	0.49	64.0	10.315	208-230/460	9
		3600	56	.25360T3E56-S	231	F2B	21.00	1.35	0.46	65.6	10.315	208-230/460	9
		1800	56	.25180S3E56-S	204	F1B	21.00	1.35	0.57	66.0	9.921	208-230/460	9
		1800	56	.25180T3E56-S	235	F2B	21.00	1.35	0.53	69.5	9.921	208-230/460	9
		1200	56	.25120S3E56-S	254	F1B	22.00	1.35	0.60	64.0	10.315	208-230/460	9
		1200	56	.25120T3E56-S	288	F2B	22.00	1.35	0.55	67.5	10.315	208-230/460	9
0.33	0.25	3600	56	.33360S3E56-S	208	F1B	21.00	1.35	0.66	66.0	10.315	208-230/460	9
		3600	56	.33360T3E56-S	242	F2B	21.00	1.35	0.61	69.5	10.315	208-230/460	9
		1800	56	.33180S3E56-S	221	F1B	21.00	1.35	0.72	68.0	9.921	208-230/460	9
		1800	56	.33180T3E56-S	256	F2B	21.00	1.35	0.67	73.4	9.921	208-230/460	9
		1200	56	.33120S3E56-S	292	F1B	23.00	1.35	0.76	68.0	10.315	208-230/460	9
		1200	56	.33120T3E56-S	333	F2B	23.00	1.35	0.70	71.4	10.315	208-230/460	9
0.50	0.37	3600	56	.50360S3E56-S	221	F1B	21.00	1.25	0.95	68.0	10.315	208-230/460	9
		3600	56	.50360T3E56-S	258	F2B	21.00	1.25	0.81	73.4	10.315	208-230/460	9
		1800	56	.50180S3E56-S	253	F1B	22.00	1.25	0.98	72.0	10.315	208-230/460	9
		1800	56	.50180T3E56-S	296	F2B	22.00	1.25	0.86	78.2	10.315	208-230/460	9
		1200	56	.50120S3E56-S	304	F1B	26.00	1.25	0.99	72.0	10.709	208-230/460	9
		1200	56	.50120T3E56-S	349	F2B	26.00	1.25	0.93	75.3	10.709	208-230/460	9
0.75	0.55	3600	56	.75360S3E56-S	259	F1B	23.00	1.25	1.26	72.0	10.709	208-230/460	9
		3600	56	.75360T3E56-S	305	F2B	23.00	1.25	1.14	76.8	10.709	208-230/460	9
		1800	56	.75180S3E56-S	282	F1B	25.00	1.25	1.34	75.5	10.709	208-230/460	9
		1800	56	.75180T3E56-S	330	F2B	25.00	1.25	1.26	81.1	10.709	208-230/460	9
		1200	56H	.75120S3E56-S	332	F1B	31.00	1.15	1.29	75.5	11.496	208-230/460	9
		1200	56H	.75120T3E56-S	384	F2B	31.00	1.15	1.26	81.7	11.496	208-230/460	9
1	0.75	3600	56	001360S3E56-S	300	F1B	24.00	1.25	1.61	74.0	10.709	208-230/460	9
		3600	56	001360T3E56-S	355	F2B	24.00	1.25	1.51	77.0	10.709	208-230/460	9
		1800	56	001180S3E56-S	299	F1B	28.00	1.15	1.80	77.0	10.709	208-230/460	9
		1800	56	001180T3E56-S	350	F2B	28.00	1.15	1.57	83.5	10.709	208-230/460	9
		1800	143/5T	001180T3E143T-S	390	N1S	39.00	1.15	1.51	85.5	11.181	208-230/460	9
		1800	143/5T	001180T3H143T-S	390	N1S	39.00	1.15	1.21	85.5	11.181	575	9
		1800	143/5T	001180T3P143T-S	390	N1S	39.00	1.15	3.47	85.5	11.181	200	9
		1200	56H	001120S3E56-S	394	F1B	35.00	1.15	1.70	77.0	11.890	208-230/460	9
		1200	56H	001120T3E56-S	458	F2B	35.00	1.15	1.68	82.5	11.890	208-230/460	9
		1200	143/5T	001120T3E145T-S	446	N1S	40.00	1.15	1.65	82.5	11.181	208-230/460	9
		1200	143/5T	001120T3H145T-S	446	N1S	40.00	1.15	1.32	82.5	11.181	575	9
1.5	1.1	3600	56	001560S3E56-S	320	F1B	27.00	1.15	2.16	77.0	11.102	208-230/460	9
		3600	56	001560T3E56-S	380	F2B	27.00	1.15	1.85	84.0	11.102	208-230/460	9
		3600	143/5T	001560T3E143T-S	442	N1S	34.00	1.15	1.85	84.0	11.181	208-230/460	9
		3600	143/5T	001560T3H143T-S	442	N1S	34.00	1.15	1.48	84.0	11.181	575	9
		1800	143/5T	001580T3E145T-S	449	N1S	47.00	1.15	2.07	86.5	12.362	208-230/460	9
		1800	56H	001580S3E56-S	305	F1B	32.00	1.15	2.30	80.0	11.496	208-230/460	9
		1800	56H	001580T3E56-S	361	F2B	32.00	1.15	2.10	86.5	11.496	208-230/460	9
		1800	143/5T	001580T3H145T-S	449	N1S	47.00	1.15	1.66	86.5	12.362	575	9
		1800	143/5T	001580T3P145T-S	449	N1S	47.00	1.15	4.77	86.5	12.362	200	9
		1200	182/4T	001520T3E182T-S	588	N1S	63.00	1.15	2.25	86.5	13.957	208-230/460	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

ODP - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
2	1.5	3600	56H	00236OS3E56-S	365	F1B	32.00	1.15	2.82	78.5	11.890	208-230/460	9
		3600	56H	00236OT3E56-S	436	F2B	32.00	1.15	2.42	85.5	11.890	208-230/460	9
		3600	143/5T	00236OT3E145T-S	487	N1S	42.00	1.15	2.42	85.5	11.969	208-230/460	9
		3600	143/5T	00236OT3H145T-S	487	N1S	42.00	1.15	1.94	85.5	11.969	575	9
		1800	56H	00218OS3E56-S	324	F1B	35.00	1.15	3.11	78.5	11.890	208-230/460	9
		1800	56H	00218OT3E56-S	371	F2B	35.00	1.15	2.69	86.5	11.890	208-230/460	9
		1800	143/5T	00218OT3E145T-S	492	N1S	44.00	1.15	2.69	86.5	12.362	208-230/460	9
		1800	143/5T	00218OT3H145T-S	492	N1S	44.00	1.15	2.15	86.5	12.362	575	9
		1800	143/5T	00218OT3P145T-S	492	N1S	44.00	1.15	6.18	86.5	12.362	200	9
		1200	182/4T	00212OT3E184T-S	597	N1S	73.00	1.15	2.95	87.5	14.744	208-230/460	9
		1200	182/4T	00212OT3H184T-S	597	N1S	73.00	1.15	2.36	87.5	14.744	575	9
3	2.2	3600	56H	00336OS3E56-S	405	F1B	35.00	1.15	3.89	81.5	12.283	208-230/460	9
		3600	56H	00336OT3E56-S	485	F2B	35.00	1.15	3.59	85.5	12.283	208-230/460	9
		3600	143/5T	00336OT3E145T-S	545	N1S	45.00	1.15	3.59	85.5	12.362	208-230/460	9
		3600	143/5T	00336OT3H145T-S	545	N1S	45.00	1.15	2.87	85.5	12.362	575	9
		1800	182/4T	00318OT3E182T-S	524	N1S	73.00	1.15	3.86	89.5	15.138	208-230/460	9
		1800	182/4T	00318OT3H182T-S	524	N1S	73.00	1.15	3.09	89.5	15.138	575	9
		1800	182/4T	00318OT3P182T-S	523	N1S	73.00	1.15	8.87	89.5	15.138	200	9
		1800	182/4T	00318OT3V182T-S	524	N1S	73.00	1.15	4.44	89.5	15.138	200/400	9
		1200	213/5T	00312OT3E213T-S	775	N1S	110.00	1.15	4.16	88.5	16.575	208-230/460	9
		1200	213/5T	00312OT3H213T-S	775	N1S	110.00	1.15	3.33	88.5	16.575	575	9
5	3.7	3600	182/4T	00536OT3E182T-S	651	N1S	66.00	1.15	6.10	86.5	14.764	208-230/460	9
		3600	182/4T	00536OT3H182T-S	651	N1S	66.00	1.15	4.88	86.5	14.764	575	9
		3600	182/4T	00536OT3V182T-S	651	N1S	66.00	1.15	7.02	86.5	14.764	200/400	9
		1800	182/4T	00518OT3E184T-S	630	N1S	87.00	1.15	6.33	89.5	16.319	208-230/460	9
5	3.7	1800	182/4T	00518OT3H184T-S	630	N1S	87.00	1.15	5.06	89.5	16.319	575	9
		1800	182/4T	00518OT3P184T-S	629	N1S	87.00	1.15	14.6	89.5	16.319	200	9
		1800	182/4T	00518OT3V184T-S	630	N1S	87.00	1.15	7.28	89.5	16.319	200/400	9
		1200	213/5T	00512OT3E215T-S	1,057	N1S	129.00	1.15	6.74	89.5	16.969	208-230/460	9
		1200	213/5T	00512OT3H215T-S	1,057	N1S	129.00	1.15	5.39	89.5	16.969	575	9
7.5	5.5	3600	182/4T	00736OT3E184T-S	920	N1S	77.00	1.15	8.67	88.5	15.138	208-230/460	9
		3600	182/4T	00736OT3H184T-S	920	N1S	77.00	1.15	6.93	88.5	15.138	575	9
		1800	213/5T	00718OT3E213T-S	910	N1S	128.00	1.15	9.14	91.0	16.575	208-230/460	9
		1800	213/5T	00718OT3H213T-S	910	N1S	128.00	1.15	7.31	91.0	16.575	575	9
		1800	213/5T	00718OT3P213T-S	910	N1S	128.00	1.15	21.0	91.0	16.575	200	9
		1200	254/6T	00712OT3E254T-S	1,467	N1S	231.00	1.15	10.2	90.2	20.472	208-230/460	9
		1200	254/6T	00712OT3H254T-S	1,467	N1S	231.00	1.15	8.16	90.2	20.472	575	9
10	7.5	3600	213/5T	01036OT3E213T-S	1,081	N1S	128.00	1.15	12.0	89.5	16.969	208-230/460	9
		3600	213/5T	01036OT3H213T-S	1,081	N1S	128.00	1.15	9.60	89.5	16.969	575	9
		1800	213/5T	01018OT3E215T-S	1,102	N1S	149.00	1.15	12.4	91.7	17.756	208-230/460	9
		1800	213/5T	01018OT3H215T-S	1,102	N1S	149.00	1.15	9.90	91.7	17.756	575	9
		1800	213/5T	01018OT3P215T-S	1,101	N1S	149.00	1.15	28.4	91.7	17.756	200	9
		1200	254/6T	01012OT3E256T-S	1,717	N1S	254.00	1.15	13.9	91.7	20.472	208-230/460	9
		1200	254/6T	01012OT3H256T-S	1,717	N1S	254.00	1.15	11.1	91.7	20.472	575	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



THREE-PHASE

ODP - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
15	11	3600	213/5T	015360T3E215T-S	1,492	N1S	143.00	1.15	17.2	90.2	17.756	208-230/460	9
		3600	213/5T	015360T3H215T-S	1,492	N1S	143.00	1.15	13.8	90.2	17.756	575	9
		1800	254/6T	015180T3E254T-S	1,477	N1S	220.00	1.15	18.3	93.0	20.472	208-230/460	9
		1800	254/6T	015180T3H254T-S	1,477	N1S	220.00	1.15	14.7	93.0	20.472	575	9
		1800	254/6T	015180T3P254T-S	1,380	N1S	220.00	1.15	42.2	93.0	20.472	200	9
		1800	254/6T	015180T3V254T-S	1,477	N1S	220.00	1.15	21.1	93.0	20.472	200/400	9
20	15	3600	254/6T	020360T3E254T-S	1,760	N1S	196.00	1.15	23.8	91.0	20.472	208-230/460	9
		3600	254/6T	020360T3H254T-S	1,760	N1S	196.00	1.15	19.0	91.0	20.472	575	9
		1800	254/6T	020180T3E256T-S	1,832	N1S	243.00	1.15	24.7	93.0	20.472	208-230/460	9
		1800	254/6T	020180T3H256T-S	1,832	N1S	243.00	1.15	19.7	93.0	20.472	575	9
		1800	254/6T	020180T3P256T-S	1,832	N1S	243.00	1.15	56.8	93.0	20.472	200	9
		1800	254/6T	020180T3V256T-S	1,832	N1S	243.00	1.15	28.4	93.0	20.472	200/400	9
25	18.5	3600	254/6T	025360T3E256T-S	2,139	N1S	219.00	1.15	29.1	91.7	20.472	208-230/460	9
		3600	254/6T	025360T3H256T-S	2,139	N1S	219.00	1.15	23.3	91.7	20.472	575	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

THREE-PHASE

ODP - AEGIS® Ring

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5T	00118OT3E143T-SG	530	N1S	39.00	1.15	1.51	85.5	11.181	208-230/460	9;34
		1800	143/5T	00118OT3H143T-SG	530	N1S	39.00	1.15	1.21	85.5	11.181	575	9;34
		1800	143/5T	00118OT3V143T-SG	530	N1S	39.00	1.15	1.74	85.5	11.181	200/400	9;34
		1200	143/5T	00112OT3E145T-SG	586	N1S	40.00	1.15	1.65	82.5	11.181	208-230/460	9;34
		1200	143/5T	00112OT3H145T-SG	586	N1S	40.00	1.15	1.32	82.5	11.181	575	9;34
1.5	1.1	3600	143/5T	00156OT3E143T-SG	582	N1S	34.00	1.15	1.85	84.0	11.181	208-230/460	9;34
		1800	143/5T	00158OT3E145T-SG	589	N1S	47.00	1.15	2.07	86.5	12.362	208-230/460	9;34
		1800	143/5T	00158OT3H145T-SG	589	N1S	47.00	1.15	1.66	86.5	12.362	575	9;34
		1800	143/5T	00158OT3V145T-SG	589	N1S	47.00	1.15	2.38	86.5	12.362	200/400	9;34
		1200	182/4T	00152OT3E182T-SG	758	N1S	63.00	1.15	2.25	86.5	13.957	208-230/460	9;34
2	1.5	3600	143/5T	00236OT3E145T-SG	627	N1S	42.00	1.15	2.42	85.5	11.969	208-230/460	9;34
		1800	143/5T	00218OT3E145T-SG	632	N1S	44.00	1.15	2.69	86.5	12.362	208-230/460	9;34
		1800	143/5T	00218OT3H145T-SG	632	N1S	44.00	1.15	2.15	86.5	12.362	575	9;34
		1800	143/5T	00218OT3V145T-SG	632	N1S	44.00	1.15	3.09	86.5	12.362	200/400	9;34
		1200	182/4T	00212OT3E184T-SG	767	N1S	73.00	1.15	2.95	87.5	14.744	208-230/460	9;34
3	2.2	3600	143/5T	00336OT3E145T-SG	685	N1S	45.00	1.15	3.59	85.5	12.362	208-230/460	9;34
		1800	182/4T	00318OT3E182T-SG	694	N1S	73.00	1.15	3.86	89.5	15.138	208-230/460	9;34
		1800	182/4T	00318OT3H182T-SG	694	N1S	73.00	1.15	3.09	89.5	15.138	575	9;34
		1800	182/4T	00318OT3V182T-SG	694	N1S	73.00	1.15	4.44	89.5	15.138	200/400	9;34
		1200	213/5T	00312OT3E213T-SG	975	N1S	110.00	1.15	4.16	88.5	16.575	208-230/460	9;34
		1200	213/5T	00312OT3H213T-SG	975	N1S	110.00	1.15	3.33	88.5	16.575	575	9;34
5	3.7	3600	182/4T	00536OT3E182T-SG	821	N1S	66.00	1.15	6.10	86.5	14.764	208-230/460	9;34
		1800	182/4T	00518OT3E184T-SG	800	N1S	87.00	1.15	6.33	89.5	16.319	208-230/460	9;34
		1800	182/4T	00518OT3H184T-SG	800	N1S	87.00	1.15	5.06	89.5	16.319	575	9;34
		1800	182/4T	00518OT3V184T-SG	800	N1S	87.00	1.15	7.28	89.5	16.319	200/400	9;34
		1200	213/5T	00512OT3E215T-SG	1,257	N1S	129.00	1.15	6.74	89.5	16.969	208-230/460	9;34
7.5	5.5	3600	182/4T	00736OT3E184T-SG	1,090	N1S	77.00	1.15	8.67	88.5	15.138	208-230/460	9;34
		1800	213/5T	00718OT3E213T-SG	1,110	N1S	128.00	1.15	9.14	91.0	16.575	208-230/460	9;34
		1800	213/5T	00718OT3H213T-SG	1,110	N1S	128.00	1.15	7.31	91.0	16.575	575	9;34
		1800	213/5T	00718OT3V213T-SG	1,110	N1S	128.00	1.15	10.5	91.0	16.575	200/400	9;34
		1200	254/6T	00712OT3E254T-SG	1,747	N1S	231.00	1.15	10.2	90.2	20.472	208-230/460	9;34
		1200	254/6T	00712OT3H254T-SG	1,747	N1S	231.00	1.15	8.16	90.2	20.472	575	9;34
10	7.5	3600	213/5T	01036OT3E213T-SG	1,281	N1S	128.00	1.15	12.0	89.5	16.969	208-230/460	9;34
		1800	213/5T	01018OT3E215T-SG	1,302	N1S	149.00	1.15	12.4	91.7	17.756	208-230/460	9;34
		1800	213/5T	01018OT3H215T-SG	1,302	N1S	149.00	1.15	9.92	91.7	17.756	575	9;34
		1800	213/5T	01018OT3V215T-SG	1,302	N1S	149.00	1.15	14.3	91.7	17.756	200/400	9;34
		1200	254/6T	01012OT3E256T-SG	1,997	N1S	254.00	1.15	13.9	91.7	20.472	208-230/460	9;34
		1200	254/6T	01012OT3H256T-SG	1,997	N1S	254.00	1.15	11.1	91.7	20.472	575	9;34
15	11	3600	213/5T	01536OT3E215T-SG	1,692	N1S	143.00	1.15	17.2	90.2	17.756	208-230/460	9;34
		1800	254/6T	01518OT3E254T-SG	1,757	N1S	220.00	1.15	18.3	93.0	20.472	208-230/460	9;34
		1800	254/6T	01518OT3H254T-SG	1,757	N1S	220.00	1.15	14.6	93.0	20.472	575	9;34
		1800	254/6T	01518OT3V254T-SG	1,757	N1S	220.00	1.15	21.0	93.0	20.472	200/400	9;34

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

THREE-PHASE

ODP - AEGIS® Ring - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
20	15	3600	254/6T	**020360T3E254T-SG**	**2,040**	N1S	196.00	1.15	23.8	91.0	20.472	208-230/460	9;34
		1800	254/6T	**020180T3E256T-SG**	**2,112**	N1S	243.00	1.15	24.7	93.0	20.472	208-230/460	9;34
		1800	254/6T	**020180T3H256T-SG**	**2,112**	N1S	243.00	1.15	19.8	93.0	20.472	575	9;34
		1800	254/6T	**020180T3V256T-SG**	**2,112**	N1S	243.00	1.15	28.4	93.0	20.472	200/400	9;34
25	18.5	3600	254/6T	**025360T3E256T-SG**	**2,419**	N1S	219.00	1.15	29.1	91.7	20.472	208-230/460	9;34

ODP - Resillient Base



HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	1800	56	**.33180S3ERB56-S**	**279**	F1B	21.00	1.35	0.72	68.0	9.921	208-230/460	9;13
		1800	B56	**.33180S3ERBB56**	**279**	F1B	22.00	1.35	0.70	64.0	11.023	208-230/460	9;13
0.50	0.37	1800	56	**.50180S3ERB56-S**	**310**	F1B	22.00	1.25	0.98	72.0	10.315	208-230/460	9;13
		1800	B56	**.50180S3ERBB56**	**310**	F1B	26.00	1.25	0.92	70.0	11.023	208-230/460	9;13
0.75	0.55	1800	56	**.75180S3ERB56-S**	**339**	F1B	25.00	1.25	1.34	75.5	10.709	208-230/460	9;13
		1800	E56	**.75180S3ERBE56**	**339**	F1B	26.00	1.25	1.35	72.0	11.811	208-230/460	9;13
1	0.75	1800	56	**001180S3ERB56-S**	**356**	F1B	28.00	1.15	1.80	77.0	10.709	208-230/460	9;13
		1800	E56	**001180S3ERBE56**	**356**	F1B	29.00	1.15	1.70	74.0	11.811	208-230/460	9;13
1.5	1.1	1800	56H	**001580S3ERB56-S**	**364**	F1B	32.00	1.15	2.30	80.0	11.496	208-230/460	9;13
		1800	E56	**001580S3ERBE56**	**364**	F1B	35.00	1.15	2.30	77.0	12.992	208-230/460	9;13

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.





JET PUMP SINGLE-PHASE (56C/56J FRAMES)

TEFC - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	B56C	**.3336ES1BJP56C**	**263**	P1A	36.00	1.15	2.85	53.0	11.496	115/208-230	3;9
		3600	B56J	**.3336ES1BJP56J**	**282**	P1B	36.00	1.15	2.85	53.0	11.996	115/208-230	3;9
0.50	0.37	3600	B56C	**.5036ES1BJP56C**	**284**	P1A	40.00	1.15	3.80	58.0	11.496	115/208-230	3;9
		3600	B56J	**.5036ES1BJP56J**	**300**	P1B	40.00	1.15	3.80	58.0	11.996	115/208-230	3;9
0.75	0.55	3600	B56C	**.7536ES1BJP56C**	**320**	P1A	41.00	1.15	5.20	64.0	11.496	115/208-230	3;9
		3600	B56J	**.7536ES1BJP56J**	**330**	P1B	41.00	1.15	5.20	64.0	11.996	115/208-230	3;9
1	0.75	3600	D56C	**00136ES1BJP56C**	**344**	P1A	46.00	1.15	6.40	67.0	12.677	115/208-230	3;9
		3600	D56J	**00136ES1BJP56J**	**374**	P1B	46.00	1.15	6.40	67.0	13.150	115/208-230	3;9
1.5	1.1	3600	D56C	**00156ES1BJP56C**	**412**	P1A	56.00	1.15	8.55	70.0	12.677	115/208-230	3;9
		3600	D56J	**00156ES1BJP56J**	**425**	P1B	56.00	1.15	8.55	70.0	13.150	115/208-230	3;9
2	1.5	3600	F56HC	**00236ES1BJP56C**	**487**	P1A	65.00	1.15	10.0	74.0	13.858	115/208-230	3;9
		3600	F56HJ	**00236ES1BJP56J**	**486**	P1B	65.00	1.15	10.0	74.0	14.330	115/208-230	3;9
3	2.2	3600	G56HC	**00336ES1DJP56C**	**548**	P1A	78.00	1.15	13.0	80.0	14.252	230	3;9;19
		3600	G56HJ	**00336ES1DJP56J**	**557**	P1B	78.00	1.15	13.0	80.0	14.724	230	9;19

TEFC - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.50	0.37	3600	B56J	**.5036ES1BJPR56J**	**305**	P1B	40.00	1.15	3.80	58.0	11.996	115/208-230	9;20
0.75	0.55	3600	B56C	**.7536ES1BJPR56C**	**341**	P1A	41.00	1.15	5.20	64.0	11.496	115/208-230	3;9;20
		3600	B56J	**.7536ES1BJPR56J**	**336**	P1B	41.00	1.15	5.20	64.0	11.996	115/208-230	9;20
		3600	56J	**.7536ES1BJPR56J-S**	**336**	P1B	41.00	1.15	4	66	12.721	115/208-230	9;20
1	0.75	3600	D56C	**00136ES1BJPR56C**	**357**	P1A	46.00	1.15	6.40	67.0	12.677	115/208-230	3;9;20
		3600	D56J	**00136ES1BJPR56J**	**386**	P1B	46.00	1.15	6.40	67.0	13.150	115/208-230	9;20
1.5	1.1	3600	D56C	**00156ES1BJPR56C**	**432**	P1A	56.00	1.15	8.55	70.0	12.677	115/208-230	3;9;20
		3600	D56J	**00156ES1BJPR56J**	**438**	P1B	56.00	1.15	8.55	70.0	13.150	115/208-230	9;20
2	1.5	3600	F56C	**00236ES1BJPR56C**	**494**	P1A	65.00	1.15	10.0	74.0	13.858	115/208-230	3;9;20
		3600	F56J	**00236ES1BJPR56J**	**498**	P1B	65.00	1.15	10.0	74.0	14.330	115/208-230	9;20
3	2.2	3600	G56C	**00336ES1DJPR56C**	**555**	P1A	78.00	1.15	13.0	80.0	14.252	230	3;9;19;20
		3600	G56J	**00336ES1DJPR56J**	**573**	P1B	78.00	1.15	13.0	80.0	14.724	230	9;19;20

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com




JET PUMP SINGLE-PHASE (56C/56J FRAMES)

ODP - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	W56J	**.33360S1BJP56J**	**254**	P1B	21.00	1.75	2.90	58.0	10.732	115/208-230	3;9
0.50	0.37	3600	W56J	**.50360S1BJP56J**	**258**	P1B	24.00	1.60	3.60	64.4	11.126	115/208-230	3;9
0.75	0.55	3600	W56J	**.75360S1BJP56J**	**296**	P1B	32.00	1.50	4.25	68.3	11.913	115/208-230	3;9
1	0.75	3600	E56J	**001360S1BJP56J**	**334**	P1B	36.00	1.40	6.80	66.3	12.031	115/208-230	3;9
1.5	1.1	3600	E56J	**001560S1BJP56J**	**382**	P1B	40.00	1.30	8.20	73.2	13.212	115/208-230	3;9
2	1.5	3600	E56J	**002360S1BJP56J**	**438**	P1B	48.00	1.20	10.4	77.3	14.000	115/208-230	3;9
3	2.2	3600	E56J	**003360S1DJP56J**	**499**	P1B	53.00	1.15	15.0	77.1	14.787	230	3;9

ODP - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	W56C	**.33360S1BJPR56C**	**237**	P1A	21.00	1.75	2.90	58.0	10.232	115/208-230	3;9;20
		3600	W56J	**.33360S1BJPR56J**	**255**	P1B	21.00	1.75	2.90	58.0	10.732	115/208-230	3;9;20
0.50	0.37	3600	W56C	**.50360S1BJPR56C**	**255**	P1A	24.00	1.60	3.60	64.4	10.826	115/208-230	3;9;20
		3600	W56J	**.50360S1BJPR56J**	**258**	P1B	24.00	1.60	3.60	64.4	11.126	115/208-230	3;9;20
0.75	0.55	3600	W56C	**.75360S1BJPR56C**	**297**	P1A	32.00	1.50	4.25	68.3	11.413	115/208-230	3;9;20
		3600	W56J	**.75360S1BJPR56J**	**296**	P1B	32.00	1.50	4.25	68.3	11.913	115/208-230	3;9;20
1	0.75	3600	E56C	**001360S1BJPR56C**	**317**	P1A	36.00	1.40	6.80	66.3	11.531	115/208-230	3;9;20
		3600	E56J	**001360S1BJPR56J**	**334**	P1B	36.00	1.40	6.80	66.3	12.031	115/208-230	3;9;20
1.5	1.1	3600	E56C	**001560S1BJPR56C**	**338**	P1A	40.00	1.30	8.20	73.2	12.712	115/208-230	3;9;20
		3600	E56J	**001560S1BJPR56J**	**382**	P1B	40.00	1.30	8.20	73.2	13.212	115/208-230	3;9;20
2	1.5	3600	E56C	**002360S1BJPR56C**	**424**	P1A	58.00	1.20	10.4	77.3	13.500	115/208-230	3;9;20
		3600	E56J	**002360S1BJPR56J**	**438**	P1B	48.00	1.20	10.4	77.3	14.000	115/208-230	3;9;20
3	2.2	3600	E56C	**003360S1DJPR56C**	**482**	P1A	53.00	1.15	15.0	77.1	14.287	230	3;9;20
		3600	E56J	**003360S1DJPR56J**	**499**	P1B	53.00	1.15	15.0	77.1	14.787	230	3;9;20

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.





JET PUMP THREE-PHASE (56C/56J FRAMES)

TEFC - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	56J	**.3336ES3EJP56J-S**	**259**	P1B	22.00	1.15	0.60	62.0	11.654	208-230/460	9
0.50	0.37	3600	56J	**.5036ES3EJP56J-S**	**267**	P1B	24.00	1.15	0.84	68.0	12.047	208-230/460	9
0.75	0.55	3600	56J	**.7536ES3EJP56J-S**	**301**	P1B	25.00	1.15	1.13	72.0	12.047	208-230/460	9
		3600	56J	**.7536ES3HJP56J-S**	**301**	P1B	25.00	1.15	0.90	72.0	12.047	575	9
1	0.75	3600	56J	**00136ES3EJP56J-S**	**344**	P1B	28.00	1.15	1.51	74.0	12.441	208-230/460	9
		3600	56J	**00136ES3HJP56J-S**	**344**	P1B	28.00	1.15	1.21	74.0	12.441	575	9
1.5	1.1	3600	56J	**00156ES3EJP56J-S**	**374**	P1B	31.00	1.15	1.99	77.0	12.835	208-230/460	9
2	1.5	3600	56HJ	**00236ES3EJP56J-S**	**421**	P1B	36.00	1.15	2.57	81.5	13.622	208-230/460	9
3	2.2	3600	56HJ	**00336ES3EJP56J-S**	**489**	P1B	43.00	1.15	3.76	81.5	14.409	208-230/460	9

TEFC - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	56C	**.3336ES3EJPR56C-S**	**257**	P1A	22.00	1.15	0.60	62.0	11.142	208-230/460	9;20
		3600	56J	**.3336ES3EJPR56J-S**	**268**	P1B	22.00	1.15	0.60	62.0	11.654	208-230/460	9;20
0.50	0.37	3600	56C	**.5036ES3EJPR56C-S**	**270**	P1A	24.00	1.15	0.84	68.0	11.539	208-230/460	9;20
		3600	56J	**.5036ES3EJPR56J-S**	**282**	P1B	24.00	1.15	0.84	68.0	12.047	208-230/460	9;20
0.75	0.55	3600	56C	**.7536ES3EJPR56C-S**	**293**	P1A	25.00	1.15	1.13	72.0	11.535	208-230/460	9;20
		3600	56J	**.7536ES3EJPR56J-S**	**319**	P1B	25.00	1.15	1.13	72.0	12.047	208-230/460	9;20
1	0.75	3600	56C	**00136ES3EJPR56C-S**	**346**	P1A	28.00	1.15	1.51	74.0	11.933	208-230/460	9;20
		3600	56J	**00136ES3EJPR56J-S**	**346**	P1B	28.00	1.15	1.51	74.0	12.441	208-230/460	9;20
1.5	1.1	3600	56C	**00156ES3EJPR56C-S**	**371**	P1A	31.00	1.15	1.99	77.0	12.323	208-230/460	9;20
		3600	56J	**00156ES3EJPR56J-S**	**378**	P1B	31.00	1.15	1.99	77.0	12.835	208-230/460	9;20
2	1.5	3600	56HC	**00236ES3EJPR56C-S**	**401**	P1A	36.00	1.15	2.57	81.5	13.114	208-230/460	9;20
		3600	56HJ	**00236ES3EJPR56J-S**	**430**	P1B	36.00	1.15	2.57	81.5	13.622	208-230/460	9;20
3	2.2	3600	56HC	**00336ES3EJPR56C-S**	**480**	P1A	43.00	1.15	3.76	81.5	13.898	208-230/460	9;19;20
		3600	56HJ	**00336ES3EJPR56J-S**	**503**	P1B	43.00	1.15	3.76	81.5	14.409	208-230/460	9;20





JET PUMP THREE-PHASE (56C/56J FRAMES)

ODP - Foot Mount

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	56C	**.33360S3EJP56J-S**	**224**	P1B	21.00	1.75	0.66	66.0	10.315	208-230/460	9
0.50	0.37	3600	56J	**.50360S3EJP56J-S**	**236**	P1B	21.00	1.60	0.95	68.0	10.827	208-230/460	9
		3600	56J	**.50360S3HJP56J-S**	**236**	P1B	21.00	1.60	0.76	68.0	10.827	575	9
0.75	0.55	3600	56J	**.75360S3EJP56J-S**	**271**	P1B	23.00	1.50	1.26	72.0	11.220	208-230/460	9
		3600	56J	**.75360S3HJP56J-S**	**271**	P1B	23.00	1.50	1.01	72.0	11.220	575	9
1	0.75	3600	56J	**001360S3EJP56J-S**	**286**	P1B	25.00	1.40	1.61	74.0	11.220	208-230/460	9
		3600	56J	**001360S3HJP56J-S**	**286**	P1B	25.00	1.40	1.29	74.0	11.220	575	9
1.5	1.1	3600	56J	**001560S3EJP56J-S**	**296**	P1B	28.00	1.30	2.16	77.0	11.614	208-230/460	9
		3600	56J	**001560S3HJP56J-S**	**296**	P1B	28.00	1.30	1.73	77.0	11.614	575	9
2	1.5	3600	56HJ	**002360S3EJP56J-S**	**316**	P1B	31.00	1.20	2.82	78.5	12.008	208-230/460	9
		3600	56HJ	**002360S3HJP56J-S**	**316**	P1B	31.00	1.20	2.26	78.5	12.008	575	9
3	2.2	3600	56HJ	**003360S3EJP56J-S**	**339**	P1B	35.00	1.15	3.89	81.5	12.795	208-230/460	9
		3600	56HJ	**003360S3HJP56J-S**	**339**	P1B	35.00	1.15	3.11	81.5	12.795	575	9

ODP - Footless

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
0.33	0.25	3600	56C	**.33360S3EJPR56C-S**	**220**	P1A	21.00	1.75	0.66	66.0	10.315	208-230/460	9;20
		3600	56J	**.33360S3EJPR56J-S**	**229**	P1B	21.00	1.75	0.66	66.0	10.815	208-230/460	9;20
0.50	0.37	3600	56C	**.50360S3EJPR56C-S**	**224**	P1A	21.00	1.60	0.95	68.0	10.315	208-230/460	9;20
		3600	56J	**.50360S3EJPR56J-S**	**241**	P1B	21.00	1.60	0.95	68.0	10.827	208-230/460	9;20
0.75	0.55	3600	56C	**.75360S3EJPR56C-S**	**257**	P1A	23.00	1.50	1.26	72.0	10.709	208-230/460	9;20
		3600	56C	**.75360S3HJPR56C-S**	**257**	P1A	23.00	1.50	1.01	72.0	10.709	575	9;20
		3600	56J	**.75360S3EJPR56J-S**	**278**	P1B	23.00	1.50	1.26	72.0	11.220	208-230/460	9;20
1	0.75	3600	56C	**001360S3EJPR56C-S**	**274**	P1A	24.00	1.40	1.61	74.0	10.709	208-230/460	9;20
		3600	56J	**001360S3EJPR56J-S**	**287**	P1B	25.00	1.40	1.61	74.0	11.220	208-230/460	9;20
1.5	1.1	3600	56C	**001560S3EJPR56C-S**	**290**	P1A	27.00	1.30	2.16	77.0	11.102	208-230/460	9;20
		3600	56C	**001560S3HJPR56C-S**	**290**	P1A	27.00	1.30	1.73	77.0	11.102	575	9;20
		3600	56J	**001560S3EJPR56J-S**	**305**	P1B	28.00	1.30	2.16	77.0	11.614	208-230/460	9;20
2	1.5	3600	56HC	**002360S3EJPR56C-S**	**311**	P1A	32.00	1.20	2.82	78.5	11.890	208-230/460	9;20
		3600	56HC	**002360S3HJPR56C-S**	**311**	P1A	32.00	1.20	2.26	78.5	11.890	575	9;20
		3600	56HJ	**002360S3EJPR56J-S**	**321**	P1B	31.00	1.20	2.82	78.5	12.008	208-230/460	9;20
3	2.2	3600	56HC	**003360S3EJPR56C-S**	**332**	P1A	35.00	1.15	3.89	81.5	12.283	208-230/460	9;20
		3600	56HJ	**003360S3EJPR56J-S**	**350**	P1B	35.00	1.15	3.89	81.5	12.795	208-230/460	9;20

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JM - TEFC

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JM	00118EP3E143JM-S	497	P1S	37.00	1.15	1.56	82.5	15.709	208-230/460	9;30
		1800	143/5JM	00118EP3H143JM-S	497	P1S	37.00	1.15	1.25	82.5	15.709	575	9;30
		1800	143/5JM	00118ET3E143JM-S	613	P1S	43.00	1.15	1.47	85.5	15.709	208-230/460	9
		1800	143/5JM	00118ET3H143JM-S	613	P1S	43.00	1.15	1.17	85.5	15.709	575	9
		1200	143/5JM	00112ET3E145JM-S	700	P1S	43.00	1.15	1.58	82.5	15.709	208-230/460	9
1.5	1.1	3600	143/5JM	00156EP3E143JM-S	527	P1S	36.00	1.15	1.90	82.5	15.709	208-230/460	9;30
		3600	143/5JM	00156ET3E143JM-S	710	P1S	39.00	1.15	1.87	84.0	15.709	208-230/460	9
		1800	143/5JM	00158EP3E145JM-S	509	P1S	43.00	1.15	2.16	84.0	15.709	208-230/460	9;30
		1800	143/5JM	00158EP3H145JM-S	509	P1S	43.00	1.15	1.73	84.0	15.709	575	9;30
		1800	143/5JM	00158ET3E145JM-S	643	P1S	43.00	1.15	2.02	86.5	15.709	208-230/460	9
		1800	143/5JM	00158ET3H145JM-S	643	P1S	43.00	1.15	1.62	86.5	15.709	575	9
		1200	182/4JM	00152ET3E182JM-S	909	P1S	73.00	1.15	2.22	87.5	17.835	208-230/460	9
2	1.5	3600	143/5JM	00236EP3E145JM-S	583	P1S	41.00	1.15	2.55	84.0	15.709	208-230/460	9;30
		3600	143/5JM	00236EP3H145JM-S	583	P1S	41.00	1.15	2.04	84.0	15.709	575	9;30
		3600	143/5JM	00236ET3E145JM-S	683	P1S	45.00	1.15	2.47	85.5	16.102	208-230/460	9
		1800	143/5JM	00218EP3E145JM-S	560	P1S	47.00	1.15	2.95	84.0	16.496	208-230/460	9;30
		1800	143/5JM	00218EP3H145JM-S	560	P1S	47.00	1.15	2.36	84.0	16.496	575	9;30
		1800	143/5JM	00218ET3E145JM-S	707	P1S	47.00	1.15	2.72	86.5	16.102	208-230/460	9
		1800	143/5JM	00218ET3H145JM-S	707	P1S	47.00	1.15	2.18	86.5	16.102	575	9
		1200	182/4JM	00212ET3E184JM-S	1,021	P1S	83.00	1.15	3.00	88.5	18.622	208-230/460	9
3	2.2	3600	143/5JM	00336EP3E145JM-S	647	P1S	50.00	1.15	3.55	85.5	16.496	208-230/460	9;30
		3600	143/5JM	00336EP3H145JM-S	647	P1S	50.00	1.15	2.84	85.5	16.496	575	9;30
		3600	182/4JM	00336EP3E182JM-S	744	P1S	67.00	1.15	3.80	85.5	17.835	208-230/460	9;30
		3600	182/4JM	00336ET3E182JM-S	918	P1S	71.00	1.15	3.67	86.5	17.835	208-230/460	9
		3600	182/4JM	00336ET3H182JM-S	918	P1S	71.00	1.15	2.94	86.5	17.835	575	9
		1800	182/4JM	00318EP3E182JM-S	886	P1S	71.00	1.15	4.05	87.5	17.835	208-230/460	9;30
		1800	182/4JM	00318EP3H182JM-S	886	P1S	71.00	1.15	3.24	87.5	17.835	575	9;30
		1800	182/4JM	00318ET3E182JM-S	1,022	P1S	87.00	1.15	3.81	89.5	19.390	208-230/460	9
		1800	182/4JM	00318ET3H182JM-S	1,022	P1S	87.00	1.15	3.05	89.5	14.860	575	9
		1200	213/5JM	00312ET3E213JM-S	1,423	P1S	142.00	1.15	4.17	89.5	20.433	208-230/460	9
5	3.7	3600	182/4JM	00536EP3E184JM-S	922	P1S	76.00	1.15	5.96	87.5	18.228	208-230/460	9;30
		3600	182/4JM	00536EP3H184JM-S	922	P1S	76.00	1.15	4.77	87.5	18.228	575	9;30
		3600	182/4JM	00536ET3E184JM-S	1,075	P1S	86.00	1.15	5.90	88.5	19.390	208-230/460	9
		3600	182/4JM	00536ET3H184JM-S	1,075	P1S	86.00	1.15	4.72	88.5	19.390	575	9
		1800	182/4JM	00518EP3E184JM-S	993	P1S	84.00	1.15	6.55	87.5	19.390	208-230/460	9;30
		1800	182/4JM	00518EP3H184JM-S	993	P1S	84.00	1.15	5.24	87.5	19.390	575	9;30
		1800	182/4JM	00518EP3P184JM-S	993	P1S	84.00	1.15	15.1	87.5	19.390	200	9;30
		1800	182/4JM	00518ET3E184JM-S	1,141	P1S	79.00	1.15	6.49	89.5	19.390	208-230/460	9
		1800	182/4JM	00518ET3H184JM-S	1,141	P1S	79.00	1.15	5.19	89.5	19.390	575	9
		1200	213/5JM	00512ET3E215JM-S	1,769	P1S	156.00	1.15	6.74	89.5	21.220	208-230/460	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JM - TEFC - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
		3600	182/4JM	**00736EP3E184JM-S**	**1,125**	P1S	84.00	1.15	8.67	88.5	18.622	208-230/460	9;30
		3600	182/4JM	**00736EP3H184JM-S**	**1,125**	P1S	84.00	1.15	6.94	88.5	18.622	575	9;30
		3600	213/5JM	**00736EP3E213JM-S**	**1,277**	P1S	129.00	1.15	8.76	88.5	20.433	208-230/460	9;30
		3600	213/5JM	**00736EP3H213JM-S**	**1,277**	P1S	129.00	1.15	7.01	88.5	20.433	575	9;30
7.5	5.5	3600	213/5JM	**00736ET3E213JM-S**	**1,419**	P1S	144.00	1.15	8.67	89.5	21.220	208-230/460	9
		1800	213/5JM	**00718EP3E213JM-S**	**1,256**	P1S	134.00	1.15	9.07	89.5	20.433	208-230/460	9;30
		1800	213/5JM	**00718EP3H213JM-S**	**1,256**	P1S	134.00	1.15	7.26	89.5	20.433	575	9;30
		1800	213/5JM	**00718ET3E213JM-S**	**1,519**	P1S	131.00	1.15	9.07	91.7	20.039	208-230/460	9
		1200	254/6JM	**00712ET3E254JM-S**	**2,455**	P1S	248.00	1.15	9.98	91.0	24.055	208-230/460	9
		3600	213/5JM	**01036EP3E215JM-S**	**1,581**	P1S	144.00	1.15	11.8	89.5	21.220	208-230/460	9;30
		3600	213/5JM	**01036EP3H215JM-S**	**1,581**	P1S	144.00	1.15	9.50	89.5	21.220	575	9;30
		3600	213/5JM	**01036ET3E215JM-S**	**1,769**	P1S	173.00	1.15	11.5	90.2	22.795	208-230/460	9
10	7.5	3600	213/5JM	**01036ET3H215JM-S**	**1,769**	P1S	173.00	1.15	9.20	90.2	22.795	575	9
		1800	213/5JM	**01018EP3E215JM-S**	**1,502**	P1S	152.00	1.15	12.1	89.5	21.614	208-230/460	9;30
		1800	213/5JM	**01018ET3E215JM-S**	**1,792**	P1S	142.00	1.15	12.2	91.7	20.433	208-230/460	9
		1200	254/6JM	**01012ET3E256JM-S**	**2,979**	P1S	277.00	1.15	13.8	91.0	24.843	208-230/460	9
		3600	213/5JM	**01536EP3E215JM-S**	**1,803**	P1S	159.00	1.15	17.2	90.2	22.795	208-230/460	9;30
		3600	213/5JM	**01536EP3H215JM-S**	**1,803**	P1S	159.00	1.15	13.8	90.2	22.795	575	9;30
		3600	213/5JM	**01536ET3E215JM-S**	**2,058**	P1S	181.00	1.15	17.1	91.0	22.795	208-230/460	9
		3600	213/5JM	**01536ET3H215JM-S**	**2,058**	P1S	181.00	1.15	13.7	91.0	22.795	575	9
		3600	254/6JM	**01536EP3E254JM-S**	**2,029**	P1S	200.00	1.15	18.0	90.2	24.055	208-230/460	9;30
15	11	3600	254/6JM	**01536EP3H254JM-S**	**2,029**	P1S	200.00	1.15	14.4	90.2	24.055	575	9;30
		3600	254/6JM	**01536ET3E254JM-S**	**2,214**	P1S	220.00	1.15	17.4	91.0	24.055	208-230/460	9
		3600	254/6JM	**01536ET3H254JM-S**	**2,214**	P1S	220.00	1.15	14.0	91.0	24.055	575	9
		1800	254/6JM	**01518EP3E254JM-S**	**2,256**	P1S	214.00	1.15	18.7	91.0	24.055	208-230/460	9;30
		1800	254/6JM	**01518EP3H254JM-S**	**2,256**	P1S	214.00	1.15	15.0	91.0	24.055	575	9;30
		1800	254/6JM	**01518ET3E254JM-S**	**2,609**	P1S	242.00	1.15	18.2	92.4	24.055	208-230/460	9
		1800	254/6JM	**01518ET3H254JM-S**	**2,609**	P1S	242.00	1.15	14.6	92.4	24.055	575	9
		3600	254/6JM	**02036EP3E256JM-S**	**2,568**	P1S	238.00	1.15	23.5	90.2	24.055	208-230/460	9;30
		3600	254/6JM	**02036EP3H256JM-S**	**2,568**	P1S	238.00	1.15	18.8	90.2	24.055	575	9;30
20	15	3600	254/6JM	**02036ET3E256JM-S**	**2,965**	P1S	256.00	1.15	22.7	91.0	24.842	208-230/460	9
		1800	254/6JM	**02018EP3E256JM-S**	**2,490**	P1S	242.00	1.15	24.9	91.0	24.055	208-230/460	9;30
		1800	254/6JM	**02018ET3E256JM-S**	**2,857**	P1S	271.00	1.15	24.5	92.4	24.843	208-230/460	9
		1800	254/6JM	**02018ET3H256JM-S**	**2,857**	P1S	271.00	1.15	19.6	92.4	24.843	575	9
25	18.5	3600	254/6JM	**02536EP3E256JM-S**	**2,803**	P1S	266.00	1.15	28.7	91.0	24.843	208-230/460	9;30

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JP - TEFC

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JP	00118EP3E143JP-S	508	P1S	37.00	1.15	1.56	82.5	18.78	208-230/460	9;30
		1800	143/5JP	00118ET3E143JP-S	624	P1S	43.00	1.15	1.47	85.5	18.78	208-230/460	9
		1200	143/5JP	00112ET3E145JP-S	714	P1S	43.00	1.15	1.58	82.5	18.78	208-230/460	9
1.5	1.1	3600	143/5JP	00156EP3E143JP-S	537	P1S	36.00	1.15	1.90	82.5	18.78	208-230/460	9;30
		3600	143/5JP	00156ET3E143JP-S	649	P1S	39.00	1.15	1.87	84.0	18.78	208-230/460	9
		1800	143/5JP	00158EP3E145JP-S	519	P1S	43.00	1.15	2.16	84.0	18.78	208-230/460	9;30
		1800	143/5JP	00158ET3E145JP-S	653	P1S	43.00	1.15	2.02	86.5	18.78	208-230/460	9
		1200	182/4JP	00152ET3E182JP-S	924	P1S	73.00	1.15	2.22	87.5	20.906	208-230/460	9
2	1.5	3600	143/5JP	00236EP3E145JP-S	594	P1S	41.00	1.15	2.55	84.0	18.78	208-230/460	9;30
		3600	143/5JP	00236ET3E145JP-S	694	P1S	45.00	1.15	2.47	85.5	19.173	208-230/460	9
		1800	143/5JP	00218EP3E145JP-S	571	P1S	47.00	1.15	2.95	84.0	19.567	208-230/460	9;30
		1800	143/5JP	00218ET3E145JP-S	718	P1S	47.00	1.15	2.72	86.5	19.173	208-230/460	9
		1200	182/4JP	00212ET3E184JP-S	1,040	P1S	83.00	1.15	3.00	88.5	21.693	208-230/460	9
3	2.2	3600	143/5JP	00336EP3E145JP-S	632	P1S	50.00	1.15	3.55	85.5	19.567	208-230/460	9;30
		3600	182/4JP	00336EP3E182JP-S	759	P1S	67.00	1.15	3.80	85.5	20.906	208-230/460	9;30
		3600	182/4JP	00336ET3E182JP-S	933	P1S	71.00	1.15	3.67	86.5	20.906	208-230/460	9
		1800	182/4JP	00318EP3E182JP-S	905	P1S	71.00	1.15	4.05	87.5	20.906	208-230/460	9;30
		1800	182/4JP	00318ET3E182JP-S	1,041	P1S	87.00	1.15	3.81	89.5	22.461	208-230/460	9
		1200	213/5JP	00312ET3E213JP-S	1,449	P1S	142.00	1.15	4.17	89.5	24.291	208-230/460	9
5	3.7	3600	182/4JP	00536EP3E184JP-S	941	P1S	76.00	1.15	5.96	87.5	21.299	208-230/460	9;30
		3600	182/4JP	00536ET3E184JP-S	1,094	P1S	86.00	1.15	5.90	88.5	22.461	208-230/460	9
		1800	182/4JP	00518EP3E184JP-S	1,013	P1S	84.00	1.15	6.55	87.5	22.461	208-230/460	9;30
		1800	182/4JP	00518EP3H184JP-S	1,013	P1S	84.00	1.15	5.24	87.5	22.461	575	9;30
		1800	182/4JP	00518ET3E184JP-S	1,161	P1S	79.00	1.15	6.49	89.5	22.461	208-230/460	9
		1200	213/5JP	00512ET3E215JP-S	1,801	P1S	156.00	1.15	6.74	89.5	25.079	208-230/460	9
7.5	5.5	3600	182/4JP	00736EP3E184JP-S	1,146	P1S	84.00	1.15	8.67	88.5	21.693	208-230/460	9;30
		3600	213/5JP	00736EP3E213JP-S	1,303	P1S	129.00	1.15	8.76	88.5	24.291	208-230/460	9;30
		3600	213/5JP	00736ET3E213JP-S	1,445	P1S	144.00	1.15	8.67	89.5	25.079	208-230/460	9
		1800	213/5JP	00718EP3E213JP-S	1,280	P1S	134.00	1.15	9.07	89.5	24.291	208-230/460	9;30
		1800	213/5JP	00718EP3H213JP-S	1,280	P1S	134.00	1.15	7.26	89.5	24.291	575	9;30
		1800	213/5JP	00718ET3E213JP-S	1,543	P1S	131.00	1.15	9.07	91.7	23.898	208-230/460	9
		1800	213/5JP	00718ET3H213JP-S	1,543	P1S	131.00	1.15	7.26	91.7	23.898	575	9
		1200	254/6JP	00712ET3E254JP-S	2,495	P1S	248.00	1.15	9.98	91.0	26.929	208-230/460	9
10	7.5	3600	213/5JP	01036EP3E215JP-S	1,613	P1S	144.00	1.15	11.8	89.5	25.079	208-230/460	9;30
		3600	213/5JP	01036ET3E215JP-S	1,801	P1S	173.00	1.15	11.5	90.2	26.654	208-230/460	9
		1800	213/5JP	01018EP3E215JP-S	1,533	P1S	152.00	1.15	12.1	89.5	25.472	208-230/460	9;30
		1800	213/5JP	01018EP3H215JP-S	1,533	P1S	152.00	1.15	9.70	89.5	25.472	575	9;30
		1800	213/5JP	01018ET3E215JP-S	1,823	P1S	142.00	1.15	12.2	91.7	24.291	208-230/460	9
		1800	213/5JP	01018ET3H215JP-S	1,823	P1S	142.00	1.15	9.80	91.7	24.291	575	9
		1200	254/6JP	01012ET3E256JP-S	3,103	P1S	277.00	1.15	13.8	91.0	27.717	208-230/460	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JP - TEFC - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
15	11	3600	213/5JP	**01536EP3E215JP-S**	**1,791**	P1S	159.00	1.15	17.2	90.2	26.654	208-230/460	9;30
		3600	254/6JP	**01536EP3E254JP-S**	**2,069**	P1S	200.00	1.15	18.0	90.2	26.929	208-230/460	9;30
		3600	254/6JP	**01536EP3V254JP-S**	**2,069**	P1S	200.00	1.15	20.7	90.2	26.929	200/400	9;30
		3600	254/6JP	**01536ET3E254JP-S**	**2,629**	P1S	220.00	1.15	17.4	91.0	26.929	208-230/460	9
		1800	254/6JP	**01518EP3E254JP-S**	**2,300**	P1S	214.00	1.15	18.7	91.0	26.929	208-230/460	9;30
		1800	254/6JP	**01518EP3H254JP-S**	**2,300**	P1S	214.00	1.15	15.0	91.0	26.929	575	9;30
		1800	254/6JP	**01518ET3E254JP-S**	**2,653**	P1S	242.00	1.15	18.2	92.4	26.929	208-230/460	9
20	15	3600	254/6JP	**02036EP3E256JP-S**	**2,621**	P1S	238.00	1.15	23.5	90.2	26.929	208-230/460	9;30
		3600	254/6JP	**02036EP3H256JP-S**	**2,451**	P1S	238.0 0	1.15	18.8	90.2	26.929	575	9;30
		3600	254/6JP	**02036ET3E256JP-S**	**3,018**	P1S	256.00	1.15	22.7	91.0	27.716	208-230/460	9
		1800	254/6JP	**02018EP3E256JP-S**	**2,541**	P1S	242.00	1.15	24.9	91.0	26.929	208-230/460	9;30
		1800	254/6JP	**02018ET3E256JP-S**	**2,908**	P1S	271.00	1.15	24.5	92.4	27.717	208-230/460	9
		3600	254/6JP	**02536EP3E256JP-S**	**2,790**	P1S	266.00	1.15	28.7	91.0	27.717	208-230/460	9;30
		3600	254/6JP	**02536EP3H256JP-S**	**2,790**	P1S	266.00	1.15	23.0	91.0	27.717	575	9;30

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JM - ODP

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JM	00118OP3E143JM-S	437	P1S	35	1.15	1.63	82.5	13.701	208-230/460	9;30
		1800	143/5JM	00118OP3H143JM-S	437	P1S	35	1.15	1.30	82.5	13.701	575	9;30
		1800	143/5JM	00118OT3E143JM-S	486	P1S	39	1.15	1.51	85.5	13.701	208-230/460	9
		1800	143/5JM	00118OT3H143JM-S	486	P1S	39	1.15	1.21	85.5	13.701	575	9
		1800	143/5JM	00118OT3V143JM-S	486	P1S	39	1.15	1.74	85.5	13.701	208-230/460	9
		1200	143/5JM	00112OT3E145JM-S	550	P1S	40	1.15	1.65	82.5	13.307	208-230/460	9
1.5	1.1	3600	143/5JM	00156OP3E143JM-S	453	P1S	34	1.15	1.88	82.5	13.701	208-230/460	9;30
		3600	143/5JM	00156OT3E143JM-S	534	P1S	34	1.15	1.85	84.0	13.701	208-230/460	9
		3600	143/5JM	00156OT3V143JM-S	534	P1S	34	1.15	2.13	84.0	13.701	200/400	9
		1800	143/5JM	00158OP3E145JM-S	478	P1S	41	1.15	2.19	84.0	13.701	208-230/460	9;30
		1800	143/5JM	00158OP3H145JM-S	478	P1S	41	1.15	1.75	84.0	13.701	575	9;30
		1800	143/5JM	00158OT3E145JM-S	553	P1S	47	1.15	2.07	86.5	14.488	208-230/460	9
		1800	143/5JM	00158OT3H145JM-S	553	P1S	47	1.15	1.66	86.5	14.488	575	9
		1200	182/4JM	00152OT3E182JM-S	769	P1S	63	1.15	2.25	86.5	15.453	208-230/460	9
2	1.5	3600	143/5JM	00236OP3E145JM-S	498	P1S	39	1.15	2.52	84.0	13.701	208-230/460	9;30
		3600	143/5JM	00236OP3H145JM-S	498	P1S	39	1.15	2.01	84.0	13.701	575	9;30
		3600	143/5JM	00236OT3E145JM-S	580	P1S	42	1.15	2.42	85.5	14.094	208-230/460	9
		3600	143/5JM	00236OT3H145JM-S	580	P1S	42	1.15	1.94	85.5	14.094	575	9
		3600	143/5JM	00236OT3V145JM-S	580	P1S	42	1.15	2.78	85.5	14.094	200/400	9
		1800	143/5JM	00218OP3E145JM-S	524	P1S	44	1.15	2.91	84.0	14.094	208-230/460	9;30
		1800	143/5JM	00218OP3H145JM-S	524	P1S	44	1.15	2.33	84.0	14.094	575	9;30
		1800	143/5JM	00218OT3E145JM-S	607	P1S	44	1.15	2.69	86.5	14.488	208-230/460	9
		1800	143/5JM	00218OT3H145JM-S	607	P1S	44	1.15	2.15	86.5	14.488	575	9
		1200	182/4JM	00212OT3E184JM-S	816	P1S	73	1.15	2.95	87.5	16.24	208-230/460	9
3	2.2	3600	143/5JM	00336OP3E145JM-S	565	P1S	42	1.15	3.69	84.0	14.094	208-230/460	9;30
		3600	143/5JM	00336OP3H145JM-S	565	P1S	42	1.15	2.95	84.0	14.094	575	9;30
		3600	143/5JM	00336OT3E145JM-S	660	P1S	45	1.15	3.59	85.5	14.488	208-230/460	9
		3600	143/5JM	00336OT3H145JM-S	660	P1S	45	1.15	2.87	85.5	14.488	575	9
		3600	143/5JM	00336OT3V145JM-S	660	P1S	45	1.15	4.13	85.5	14.488	200/400	9
		1800	182/4JM	00318OP3E182JM-S	557	P1S	61	1.15	4.04	86.5	15.453	208-230/460	9;30
		1800	182/4JM	00318OP3H182JM-S	557	P1S	61	1.15	3.23	86.5	15.453	575	9;30
		1800	182/4JM	00318OT3E182JM-S	665	P1S	73	1.15	3.86	89.5	16.634	208-230/460	9
		1800	182/4JM	00318OT3H182JM-S	665	P1S	73	1.15	3.09	89.5	16.634	575	9
		1800	182/4JM	00318OT3V182JM-S	665	P1S	73	1.15	4.43	89.5	16.634	200/400	9
		1200	213/5JM	00312OT3E213JM-S	1,105	P1S	110	1.15	4.16	88.5	17.717	208-230/460	9
5	3.7	3600	182/4JM	00536OP3E182JM-S	669	P1S	60	1.15	6.24	85.5	15.453	208-230/460	9;30
		3600	182/4JM	00536OP3H182JM-S	669	P1S	60	1.15	4.99	85.5	15.453	575	9;30
		3600	182/4JM	00536OT3E182JM-S	780	P1S	66	1.15	6.10	86.5	16.260	208-230/460	9
		3600	182/4JM	00536OT3H182JM-S	780	P1S	66	1.15	4.88	86.5	16.260	575	9
		3600	182/4JM	00536OT3V182JM-S	780	P1S	66	1.15	7.02	86.5	16.260	200/400	9
		1800	182/4JM	00518OP3E184JM-S	740	P1S	73	1.15	6.47	87.5	16.634	208-230/460	9;30
		1800	182/4JM	00518OP3H184JM-S	740	P1S	73	1.15	5.18	87.5	16.634	575	9;30
		1800	182/4JM	00518OT3E184JM-S	849	P1S	87	1.15	6.33	89.5	17.815	208-230/460	9
		1800	182/4JM	00518OT3H184JM-S	849	P1S	87	1.15	5.06	89.5	17.815	575	9
		1200	213/5JM	00512OT3E215JM-S	1,319	P1S	129	1.15	6.74	89.5	18.110	208-230/460	9

Please refer to back cover for description of "NOTES"

continued on next page

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JM - ODP - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
7.5	5.5	3600	182/4JM	007360P3E184JM-S	862	P1S	70	1.15	8.86	87.5	16.260	208-230/460	9;30
		3600	182/4JM	007360P3H184JM-S	862	P1S	70	1.15	7.09	87.5	16.260	575	9;30
		3600	182/4JM	007360T3E184JM-S	1,086	P1S	77	1.15	8.67	88.5	16.634	208-230/460	9
		3600	182/4JM	007360T3H184JM-S	1,086	P1S	77	1.15	6.93	88.5	16.634	575	9
		3600	182/4JM	007360T3V184JM-S	1,086	P1S	77	1.15	9.97	88.5	16.634	208-230/460	9
		1800	213/5JM	007180P3E213JM-S	945	P1S	112	1.15	9.29	88.5	17.717	208-230/460	9;30
		1800	213/5JM	007180P3H213JM-S	945	P1S	112	1.15	7.43	88.5	17.717	575	9;30
		1800	213/5JM	007180T3E213JM-S	1,119	P1S	128	1.15	9.14	91.0	17.717	208-230/460	9
		1800	213/5JM	007180T3H213JM-S	1,120	P1S	128	1.15	7.31	91.0	17.717	575	9
		1200	254/6JM	007120T3E254JM-S	1,985	P1S	231	1.15	10.2	90.2	21.969	208-230/460	9
10	7.5	3600	213/5JM	010360P3E213JM-S	1,109	P1S	115	1.15	12.2	88.5	17.717	208-230/460	9;30
		3600	213/5JM	010360P3H213JM-S	1,109	P1S	115	1.15	9.80	88.5	17.717	575	9;30
		3600	213/5JM	010360T3E213JM-S	1,289	P1S	128	1.15	12.0	89.5	18.110	208-230/460	9
		3600	213/5JM	010360T3H213JM-S	1,289	P1S	128	1.15	9.60	89.5	18.110	575	9
		3600	213/5JM	010360T3V213JM-S	1,289	P1S	128	1.15	13.8	89.5	18.110	200/400	9
		1800	213/5JM	010180P3E215JM-S	1,161	P1S	128	1.15	12.4	89.5	17.717	208-230/460	9;30
		1800	213/5JM	010180P3H215JM-S	1,161	P1S	128	1.15	9.90	89.5	17.717	575	9;30
		1800	213/5JM	010180T3E215JM-S	1,364	P1S	149	1.15	12.4	91.7	18.898	208-230/460	9
		1800	213/5JM	010180T3H215JM-S	1,366	P1S	149	1.15	9.90	91.7	18.898	575	9
		1200	254/6JM	010120T3E256JM-S	2,298	P1S	254	1.15	13.9	91.7	21.969	208-230/460	9
15	11	3600	213/5JM	015360P3E215JM-S	1,447	P1S	128	1.15	17.5	89.5	18.110	208-230/460	9;30
		3600	213/5JM	015360P3H215JM-S	1,447	P1S	128	1.15	14.0	89.5	18.110	575	9;30
		3600	213/5JM	015360P3V215JM-S	1,447	P1S	128	1.15	20.1	89.5	18.110	200/400	9;30
		3600	213/5JM	015360T3E215JM-S	1,707	P1S	143	1.15	17.2	90.2	18.898	208-230/460	9
		3600	213/5JM	015360T3H215JM-S	1,707	P1S	143	1.15	13.8	90.2	18.898	575	9
		3600	213/5JM	015360T3V215JM-S	1,707	P1S	143	1.15	19.8	90.2	18.898	200/400	9
		1800	254/6JM	015180P3E254JM-S	1,749	P1S	197	1.15	18.5	91.0	21.969	208-230/460	9;30
		1800	254/6JM	015180P3H254JM-S	1,749	P1S	197	1.15	14.8	91.0	21.969	575	9;30
		1800	254/6JM	015180T3E254JM-S	1,995	P1S	220	1.15	18.3	93.0	21.969	208-230/460	9
		1800	254/6JM	015180T3H254JM-S	1,995	P1S	220	1.15	14.7	93.0	21.969	575	9
		1800	254/6JM	015180T3V254JM-S	1,995	P1S	220	1.15	21.1	93.0	21.969	200/400	9
20	15	3600	254/6JM	020360P3E254JM-S	1,816	P1S	196	1.15	23.7	90.2	21.969	208-230/460	9;30
		3600	254/6JM	020360P3H254JM-S	1,816	P1S	196	1.15	19.0	90.2	21.969	575	9;30
		3600	254/6JM	020360T3E254JM-S	2,107	P1S	196	1.15	23.8	91.0	21.969	208-230/460	9
		3600	254/6JM	020360T3H254JM-S	2,107	P1S	196	1.15	19.0	91.0	21.969	575	9
		1800	254/6JM	020180P3E256JM-S	2,107	P1S	211	1.15	24.9	91.0	21.969	208-230/460	9;30
		1800	254/6JM	020180P3H256JM-S	2,013	P1S	211	1.15	19.9	91.0	21.969	575	9;30
		1800	254/6JM	020180T3E256JM-S	2,413	P1S	243	1.15	24.7	93.0	21.969	208-230/460	9
		1800	254/6JM	020180T3H256JM-S	2,413	P1S	243	1.15	19.7	93.0	21.969	575	9
25	18.5	3600	254/6JM	025360P3E256JM-S	2,242	P1S	219	1.15	29.0	91.0	21.969	208-230/460	9;30
		3600	254/6JM	025360P3H256JM-S	2,242	P1S	219	1.15	23.2	91.0	21.969	575	9;30
		3600	254/6JM	025360T3E256JM-S	2,598	P1S	219	1.15	29.1	91.7	21.969	208-230/460	9
		3600	254/6JM	025360T3H256JM-S	2,598	P1S	219	1.15	23.3	91.7	21.969	575	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JP - ODP

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JP	00118OP3E143JP-S	437	P1S	35.00	1.15	1.63	82.5	16.772	208-230/460	9;30
		1800	143/5JP	00118OT3E143JP-S	486	P1S	39.00	1.15	1.51	85.5	16.772	208-230/460	9
		1200	143/5JP	00112OT3E145JP-S	550	P1S	40.00	1.15	1.65	82.5	16.378	208-230/460	9
1.5	1.1	3600	143/5JP	00156OP3E143JP-S	453	P1S	34.00	1.15	1.88	82.5	16.772	208-230/460	9;30
		3600	143/5JP	00156OP3V143JP-S	453	P1S	34.00	1.15	2.16	82.5	16.772	200/400	9;30
		3600	143/5JP	00156OT3E143JP-S	534	P1S	34.00	1.15	1.85	84.0	16.772	208-230/460	9
		1800	143/5JP	00158OP3E145JP-S	478	P1S	41.00	1.15	2.19	84.0	16.772	208-230/460	9;30
		1800	143/5JP	00158OT3E145JP-S	553	P1S	47.00	1.15	2.07	86.5	17.559	208-230/460	9
		1200	182/4JP	00152OT3E182JP-S	729	P1S	63.00	1.15	2.25	86.5	18.524	208-230/460	9
2	1.5	3600	143/5JP	00236OP3E145JP-S	498	P1S	39.00	1.15	2.52	84.0	16.772	208-230/460	9;30
		3600	143/5JP	00236OP3V145JP-S	498	P1S	39.00	1.15	2.90	84.0	16.772	200/400	9;30
		3600	143/5JP	00236OT3E145JP-S	580	P1S	42.00	1.15	2.42	85.5	17.165	208-230/460	9
		1800	143/5JP	00218OP3E145JP-S	524	P1S	44.00	1.15	2.91	84.0	17.165	208-230/460	9;30
		1800	143/5JP	00218OT3E145JP-S	607	P1S	44.00	1.15	2.69	86.5	17.559	208-230/460	9
		1200	182/4JP	00212OT3E184JP-S	863	P1S	73.00	1.15	2.95	87.5	19.311	208-230/460	9
3	2.2	3600	143/5JP	00336OP3E145JP-S	565	P1S	42.00	1.15	3.69	84.0	17.165	208-230/460	9;30
		3600	143/5JP	00336OP3V145JP-S	565	P1S	42.00	1.15	4.25	84.0	17.165	200/400	9;30
		3600	143/5JP	00336OT3E145JP-S	660	P1S	45.00	1.15	3.59	85.5	17.559	208-230/460	9
		3600	143/5JP	00336OT3H145JP-S	660	P1S	45.00	1.15	2.87	85.5	17.559	575	9
		1800	182/4JP	00318OP3E182JP-S	557	P1S	61.00	1.15	4.04	86.5	18.524	208-230/460	9;30
		1800	182/4JP	00318OT3E182JP-S	665	P1S	73.00	1.15	3.86	89.5	19.705	208-230/460	9
		1800	182/4JP	00318OT3H182JP-S	665	P1S	73.00	1.15	3.09	89.5	19.705	575	9
		1200	213/5JP	00312OT3E213JP-S	1,095	P1S	110.00	1.15	4.16	88.5	21.575	208-230/460	9
5	3.7	3600	182/4JP	00536OP3E182JP-S	669	P1S	60.00	1.15	6.24	85.5	18.524	208-230/460	9;30
		3600	182/4JP	00536OP3V182JP-S	669	P1S	60.00	1.15	7.18	85.5	18.524	200/400	9;30
		3600	182/4JP	00536OT3E182JP-S	792	P1S	66.00	1.15	6.10	86.5	19.331	208-230/460	9
		3600	182/4JP	00536OT3H182JP-S	792	P1S	66.00	1.15	4.88	86.5	19.331	575	9
		1800	182/4JP	00518OP3E184JP-S	739	P1S	73.00	1.15	6.47	87.5	19.705	208-230/460	9;30
		1800	182/4JP	00518OT3E184JP-S	848	P1S	87.00	1.15	6.33	89.5	20.886	208-230/460	9
		1800	182/4JP	00518OT3H184JP-S	848	P1S	87.00	1.15	5.06	89.5	20.886	575	9
		1200	213/5JP	00512OT3E215JP-S	1,321	P1S	129.00	1.15	6.74	89.5	21.969	208-230/460	9
7.5	5.5	3600	182/4JP	00736OP3E184JP-S	862	P1S	70.00	1.15	8.86	87.5	19.331	208-230/460	9;30
		3600	182/4JP	00736OP3V184JP-S	862	P1S	70.00	1.15	10.2	87.5	19.331	200/400	9;30
		3600	182/4JP	00736OT3E184JP-S	1,086	P1S	77.00	1.15	8.67	88.5	19.705	208-230/460	9
		3600	182/4JP	00736OT3H184JP-S	1,086	P1S	77.00	1.15	6.94	88.5	19.705	575	9
		1800	213/5JP	00718OP3E213JP-S	946	P1S	112.00	1.15	9.29	88.5	21.575	208-230/460	9;30
		1800	213/5JP	00718OP3H213JP-S	946	P1S	112.00	1.15	7.43	88.5	21.575	575	9;30
		1800	213/5JP	00718OT3E213JP-S	1,120	P1S	128.00	1.15	9.14	91.0	21.575	208-230/460	9
		1800	213/5JP	00718OT3H213JP-S	1,120	P1S	128.00	1.15	7.31	91.0	21.575	575	9
		1800	213/5JP	00718OT3V213JP-S	1,120	P1S	128.00	1.15	10.5	91.0	21.575	200/400	9
		1200	254/6JP	00712OT3E254JP-S	2,113	P1S	231.00	1.15	10.2	90.2	24.843	208-230/460	9

continued on next page

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



CLOSE-COUPLED PUMP THREE PHASE

JP - ODP - *continued*

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
10	7.5	3600	213/5JP	**010360P3E213JP-S**	**1,109**	P1S	115.00	1.15	12.2	88.5	21.575	208-230/460	9;30
		3600	213/5JP	**010360P3H213JP-S**	**1,109**	P1S	115.00	1.15	9.80	88.5	21.575	575	9;30
		3600	213/5JP	**010360P3V213JP-S**	**1,109**	P1S	115.00	1.15	14.1	88.5	21.575	200/400	9;30
		3600	213/5JP	**010360T3E213JP-S**	**1,289**	P1S	128.00	1.15	12.0	89.5	21.969	208-230/460	9
		3600	213/5JP	**010360T3H213JP-S**	**1,289**	P1S	128.00	1.15	9.60	89.5	21.969	575	9
		1800	213/5JP	**010180P3E215JP-S**	**1,163**	P1S	128.00	1.15	12.4	89.5	21.575	208-230/460	9;30
		1800	213/5JP	**010180P3H215JP-S**	**1,163**	P1S	128.00	1.15	9.90	89.5	21.575	575	9;30
		1800	213/5JP	**010180T3E215JP-S**	**1,366**	P1S	149.00	1.15	12.4	91.7	22.756	208-230/460	9
		1800	213/5JP	**010180T3H215JP-S**	**1,366**	P1S	149.00	1.15	9.90	91.7	22.756	575	9
		1800	213/5JP	**010180T3V215JP-S**	**1,366**	P1S	149.00	1.15	14.2	91.7	22.756	200/400	9
		1200	254/6JP	**010120T3E256JP-S**	**2,298**	P1S	254.00	1.15	13.9	91.7	24.843	208-230/460	9
15	11	3600	213/5JP	**015360P3E215JP-S**	**1,447**	P1S	128.00	1.15	17.5	89.5	21.969	208-230/460	9;30
		3600	213/5JP	**015360P3H215JP-S**	**1,447**	P1S	128.00	1.15	14.0	89.5	21.969	575	9;30
		3600	213/5JP	**015360P3V215JP-S**	**1,447**	P1S	128.00	1.15	20.2	89.5	21.969	200/400	9;30
		3600	213/5JP	**015360T3E215JP-S**	**1,707**	P1S	143.00	1.15	17.2	90.2	22.756	208-230/460	9
		3600	213/5JP	**015360T3H215JP-S**	**1,707**	P1S	143.00	1.15	13.8	90.2	22.756	575	9
		1800	254/6JP	**015180P3E254JP-S**	**1,749**	P1S	197.00	1.15	18.5	91.0	24.843	208-230/460	9;30
		1800	254/6JP	**015180P3H254JP-S**	**1,749**	P1S	197.00	1.15	14.8	91.0	24.843	575	9;30
		1800	254/6JP	**015180T3E254JP-S**	**1,995**	P1S	220.00	1.15	18.3	93.0	24.843	208-230/460	9
		1800	254/6JP	**015180T3H254JP-S**	**1,995**	P1S	220.00	1.15	14.6	93.0	24.843	575	9
20	15	3600	254/6JP	**020360P3E254JP-S**	**1,815**	P1S	196.00	1.15	23.7	90.2	24.843	208-230/460	9;30
		3600	254/6JP	**020360P3H254JP-S**	**1,815**	P1S	196.00	1.15	19.0	90.2	24.843	575	9;30
		3600	254/6JP	**020360P3V254JP-S**	**1,815**	P1S	196.00	1.15	27.3	90.2	24.843	200/400	9;30
		3600	254/6JP	**020360T3E254JP-S**	**2,106**	P1S	196.00	1.15	23.8	91.0	24.843	208-230/460	9
		3600	254/6JP	**020360T3H254JP-S**	**2,106**	P1S	196.00	1.15	19.0	91.0	24.843	575	9
		1800	254/6JP	**020180P3E256JP-S**	**2,107**	P1S	211.00	1.15	24.9	91.0	24.843	208-230/460	9;30
		1800	254/6JP	**020180P3H256JP-S**	**2,107**	P1S	211.00	1.15	19.9	91.0	24.843	575	9;30
		1800	254/6JP	**020180T3E256JP-S**	**2,413**	P1S	243.00	1.15	24.7	93.0	24.843	208-230/460	9
		1800	254/6JP	**020180T3H256JP-S**	**2,413**	P1S	243.00	1.15	19.8	93.0	24.843	575	9
25	18.5	3600	254/6JP	**025360P3E256JP-S**	**2,243**	P1S	219.00	1.15	29.0	91.0	24.843	208-230/460	9;30
		3600	254/6JP	**025360P3H256JP-S**	**2,243**	P1S	219.00	1.15	23.2	91.0	24.843	575	9;30
		3600	254/6JP	**025360P3V256JP-S**	**2,243**	P1S	219.00	1.15	33.3	91.0	24.843	200/400	9;30
		3600	254/6JP	**025360T3E256JP-S**	**2,599**	P1S	219.00	1.15	29.1	91.7	24.843	208-230/460	9
		3600	254/6JP	**025360T3H256JP-S**	**2,599**	P1S	219.00	1.15	23.3	91.7	24.843	575	9

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.



CLOSE-COUPLED PUMP THREE PHASE

JM - ODP - Footless Vertical

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JM	**00118OP3E143JMV-S**	**513**	P1S	35.00	1.15	1.63	82.5	15.000	208-230/460	9;15;30
1.5	1.1	3600	143/5JM	**00156OP3E143JMV-S**	**542**	P1S	34.00	1.15	1.88	82.5	15.000	208-230/460	9;15;30
		1800	143/5JM	**00158OP3E145JMV-S**	**554**	P1S	48.00	1.15	2.10	84.0	15.354	208-230/460	9;15;30
2	1.5	3600	143/5JM	**00236OP3E145JMV-S**	**573**	P1S	39.00	1.15	2.52	84.0	15.000	208-230/460	9;15;30
		1800	143/5JM	**00218OP3E145JMV-S**	**603**	P1S	44.00	1.15	2.91	84.0	15.393	208-230/460	9;15;30
3	2.2	3600	143/5JM	**00336OP3E145JMV-S**	**657**	P1S	42.00	1.15	3.69	84.0	15.393	208-230/460	9;15;30
		1800	182/4JM	**00318OP3E182JMV-S**	**687**	P1S	61.00	1.15	4.04	86.5	16.752	208-230/460	9;15;30
		1200	213/5JMV	**00312OP3E213JMV-S**	**983**	P1S	111.00	1.15	4.31	86.5	18.977	208-230/460	9;15;30
5	3.7	3600	182/4JM	**00536OP3E182JMV-S**	**797**	P1S	60.00	1.15	6.24	85.5	16.752	208-230/460	9;15;30
		1800	182/4JM	**00518OP3E184JMV-S**	**875**	P1S	73.00	1.15	6.47	87.5	17.933	208-230/460	9;15;30
		1200	215JMV	**00512OP3E215JMV-S**	**1,287**	P1S	131.00	1.15	6.89	87.5	18.977	208-230/460	9;15;30
7.5	5.5	3600	182/4JM	**00736OP3E184JMV-S**	**993**	P1S	70.00	1.15	8.86	87.5	17.559	208-230/460	9;15;30
		3600	182/4JM	**00736OP3H184JMV-S**	**993**	P1S	70.00	1.15	7.09	87.5	17.559	208-230/460	9;15;30
		1800	213/5JM	**00718OP3E213JMV-S**	**1,106**	P1S	112.00	1.15	9.29	88.5	18.977	208-230/460	9;15;30
10	7.5	3600	213/5JM	**01036OP3E213JMV-S**	**1,201**	P1S	115.00	1.15	12.2	88.5	18.977	208-230/460	9;15;30
		3600	213/5JM	**01036OP3V213JMV-S**	**1,201**	P1S	115.00	1.15	14.0	88.5	18.977	200/400	9;15;30
		1800	213/5JM	**01018OP3E215JMV-S**	**1,323**	P1S	128.00	1.15	12.4	89.5	18.977	208-230/460	9;15;30
		1800	213/5JM	**01018OP3H215JMV-S**	**1,323**	P1S	128.00	1.15	9.90	89.5	18.977	575	9;15;30
15	11	3600	213/5JM	**01536OP3E215JMV-S**	**1,617**	P1S	128.00	1.15	17.5	89.5	19.370	208-230/460	9;15;30
		3600	213/5JM	**01536OP3H215JMV-S**	**1,617**	P1S	128.00	1.15	14.0	89.5	19.370	575	9;15;30
20	15	3600	254/6JM	**02036OP3E254JMV-S**	**2,092**	P1S	196.00	1.15	23.7	90.2	23.347	208-230/460	9;15;30
		3600	254/6JM	**02036OP3H254JMV-S**	**2,092**	P1S	196.00	1.15	19.0	90.2	23.347	575	9;15;30
		3600	254/6JM	**02036OP3V254JMV-S**	**2,092**	P1S	231.00	1.15	27.3	90.2	23.247	200/400	9;15;30
25	18.5	3600	254/6JM	**02536OP3E256JMV-S**	**2,352**	P1S	219.00	1.15	29.0	91.0	23.347	208-230/460	9;15;30
		3600	254/6JM	**02536OP3H256JMV-S**	**2,352**	P1S	219.00	1.15	23.2	91.0	23.347	575	9;15;30

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com



CLOSE-COUPLED PUMP THREE PHASE

JP - ODP - Footless Vertical

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1.5	1.1	3600	143/5JP	**001560P3E143JPV-S**	**513**	P1S	34.00	1.15	1.88	82.5	18.071	208-230/460	9;15;30
2	1.5	3600	143/5JP	**002360P3E145JPV-S**	**559**	P1S	39.00	1.15	2.52	84.0	18.071	208-230/460	9;15;30
3	2.2	3600	143/5JP	**003360P3E145JPV-S**	**629**	P1S	42.00	1.15	3.69	84.0	18.464	208-230/460	9;15;30
5	3.7	3600	182/4JP	**005360P3E182JPV-S**	**729**	P1S	60.00	1.15	6.24	85.5	19.823	208-230/460	9;15;30
7.5	5.5	3600	182/4JP	**007360P3E184JPV-S**	**993**	P1S	70.00	1.15	8.86	87.5	20.630	208-230/460	9;15;30
		3600	182/4JP	**007360P3V184JPV-S**	**993**	P1S	70.00	1.15	10.2	87.5	20.630	200/400	9;15;30
		1200	254/6JPV	**007120P3E254JPV-S**	**1,928**	P1S	229.00	1.15	10.8	88.5	26.221	208-230/460	9;15;30
10	7.5	3600	213/5JP	**010360P3E213JPV-S**	**1,273**	P1S	115.00	1.15	12.2	88.5	22.835	208-230/460	9;15;30
		3600	213/5JP	**010360P3H213JPV-S**	**1,273**	P1S	115.00	1.15	9.80	88.5	22.835	575	9;15;30
		3600	213/5JP	**010360P3V213JPV-S**	**1,273**	P1S	115.00	1.15	14.1	88.5	22.835	200/400	9;15;30
15	11	3600	213/5JP	**015360P3E215JPV-S**	**1,617**	P1S	128.00	1.15	17.5	89.5	23.229	208-230/460	9;15;30
		3600	213/5JP	**015360P3H215JPV-S**	**1,617**	P1S	128.00	1.15	14.0	89.5	23.229	575	9;15;30
		3600	213/5JP	**015360P3V215JPV-S**	**1,617**	P1S	128.00	1.15	20.2	89.5	23.229	200/400	9;15;30
		3600	213/5JP	**015360T3E215JPV-S**	**1,914**	P1S	139.00	1.15	17.2	91.0	21.240	208-230/460	9;15;30
		1800	254/6JP	**015180P3V254JPV-S**	**1,938**	P1S	197.00	1.15	21.28	91.0	26.221	208-230/460	9;15;30
20	15	3600	254/6JP	**020360P3E254JPV-S**	**2,092**	P1S	196.00	1.15	23.7	90.2	26.221	208-230/460	9;15;30
		3600	254/6JP	**020360P3H254JPV-S**	**2,092**	P1S	196.00	1.15	19.0	90.2	26.221	575	9;15;30
		3600	254/6JP	**020360P3V254JPV-S**	**2,092**	P1S	196.00	1.15	27.3	90.2	26.221	200/400	9;15;30
		3600	254/6JP	**020360T3E254JPV-S**	**2,814**	P1S	205.00	1.15	23.8	91.0	26.221	208-230/460	9;15;30
25	18.5	3600	254/6JP	**025360P3E256JPV-S**	**2,518**	P1S	219.00	1.15	29.0	91.0	26.221	208-230/460	9;15;30
		3600	254/6JP	**025360P3H256JPV-S**	**2,518**	P1S	219.00	1.15	23.2	91.0	26.221	575	9;15;30
		3600	254/6JP	**025360P3V256JPV-S**	**2,518**	P1S	219.00	1.15	33.3	91.0	26.221	200/400	9;15;30

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

CLOSE-COUPLED PUMP THREE PHASE

JM - ODP - AEGIS® Ring



HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JM	00118OT3E143JM-SG	626	P1S	39.00	1.15	1.51	85.5	13.701	208-230/460	9;11;34
		1800	143/5JM	00118OT3H143JM-SG	626	P1S	39.00	1.15	1.21	85.5	13.701	575	9;11;34
1.5	1.1	3600	143/5JM	00156OT3E143JM-SG	674	P1S	34.00	1.15	1.85	84.0	13.701	208-230/460	9;11;34
		3600	143/5JM	00156OT3H143JM-SG	674	P1S	34.00	1.15	1.48	84.0	13.701	575	9;11;34
		1800	143/5JM	00158OT3E145JM-SG	693	P1S	47.00	1.15	2.07	86.5	14.488	208-230/460	9;11;34
		1800	143/5JM	00158OT3H145JM-SG	693	P1S	47.00	1.15	1.66	86.5	14.488	575	9;11;34
2	1.5	1800	143/5JM	00218OT3E145JM-SG	747	P1S	44.00	1.15	2.69	86.5	14.488	208-230/460	9;11;34
		1800	143/5JM	00218OT3H145JM-SG	747	P1S	44.00	1.15	2.15	86.5	13.701	575	9;11;34
		3600	143/5JM	00236OT3E145JM-SG	720	P1S	42.00	1.15	2.42	85.5	14.094	208-230/460	9;11;34
		3600	143/5JM	00236OT3H145JM-SG	720	P1S	42.00	1.15	1.94	85.5	14.094	575	9;11;34
		3600	143/5JM	00236OT3V145JM-SG	720	P1S	42.00	1.15	2.78	85.5	14.094	200/400	9;11;34
3	2.2	1800	182/4JM	00318OT3E182JM-SG	835	P1S	73.00	1.15	3.86	89.5	16.634	208-230/460	9;11;34
		1800	182/4JM	00318OT3H182JM-SG	835	P1S	73.00	1.15	3.09	89.5	16.634	575	9;11;34
		1800	182/4JM	00318OT3V182JM-SG	835	P1S	73.00	1.15	4.43	89.5	16.634	200/400	9;11;34
		3600	143/5JM	00336OT3E145JM-SG	800	P1S	45.00	1.15	3.59	85.5	14.488	208-230/460	9;11;34
		3600	143/5JM	00336OT3H145JM-SG	800	P1S	45.00	1.15	2.87	85.5	14.488	575	9;11;34
		3600	143/5JM	00336OT3V145JM-SG	800	P1S	45.00	1.15	4.13	85.5	14.488	200/400	9;11;34
5	3.7	1800	182/4JM	00518OT3E184JM-SG	1,019	P1S	87.00	1.15	6.33	89.5	17.815	208-230/460	9;11;34
		1800	182/4JM	00518OT3H184JM-SG	1,019	P1S	87.00	1.15	5.06	89.5	17.815	575	9;11;34
		3600	182/4JM	00536OT3E182JM-SG	962	P1S	66.00	1.15	6.10	86.5	16.260	208-230/460	9;11;34
		3600	182/4JM	00536OT3H182JM-SG	962	P1S	66.00	1.15	4.88	86.5	16.260	575	9;11;34
		3600	182/4JM	00536OT3V182JM-SG	962	P1S	66.00	1.15	7.02	86.5	16.260	200/400	9;11;34
7.5	5.5	1800	213/5JM	00718OT3E213JM-SG	1,320	P1S	128.00	1.15	9.14	91.0	17.717	208-230/460	9;11;34
		1800	213/5JM	00718OT3H213JM-SG	1,320	P1S	128.00	1.15	7.31	91.0	17.717	575	9;11;34
		3600	182/4JM	00736OT3E184JM-SG	1,256	P1S	77.00	1.15	8.67	88.5	16.634	208-230/460	9;11;34
		3600	182/4JM	00736OT3H184JM-SG	1,256	P1S	77.00	1.15	6.93	88.5	16.634	575	9;11;34
10	7.5	1800	213/5JM	01018OT3E215JM-SG	1,566	P1S	149.00	1.15	12.4	91.7	18.898	208-230/460	9;11;34
		1800	213/5JM	01018OT3H215JM-SG	1,566	P1S	149.00	1.15	9.90	91.7	18.898	575	9;11;34
		3600	213/5JM	01036OT3E213JM-SG	1,489	P1S	128.00	1.15	12.0	89.5	18.110	208-230/460	9;11;34
		3600	213/5JM	01036OT3H213JM-SG	1,489	P1S	128.00	1.15	9.60	89.5	18.110	575	9;11;34
15	11	1800	254/6JM	01518OT3E254JM-SG	2,275	P1S	220.00	1.15	18.3	93.0	21.969	208-230/460	9;11;34
		1800	254/6JM	01518OT3H254JM-SG	2,275	P1S	220.00	1.15	14.7	93.0	21.969	575	9;11;34
		3600	213/5JM	01536OT3E215JM-SG	1,907	P1S	143.00	1.15	17.2	90.2	18.898	208-230/460	9;11;34
		3600	213/5JM	01536OT3H215JM-SG	1,907	P1S	143.00	1.15	13.8	90.2	18.898	575	9;11;34
20	15	1800	254/6JM	02018OT3E256JM-SG	2,693	P1S	243.00	1.15	24.7	93.0	21.969	208-230/460	9;11;34
		1800	254/6JM	02018OT3H256JM-SG	2,693	P1S	243.00	1.15	19.7	93.0	21.969	575	9;11;34
		3600	254/6JM	02036OT3E254JM-SG	2,387	P1S	196.00	1.15	23.8	91.0	21.969	208-230/460	9;11;34
		3600	254/6JM	02036OT3H254JM-SG	2,387	P1S	196.00	1.15	19.0	91.0	21.969	575	9;11;34
25	18.5	3600	254/6JM	02536OT3E256JM-SG	2,879	P1S	219.00	1.15	29.1	91.7	21.969	208-230/460	9;11;34
		3600	254/6JM	02536OT3H256JM-SG	2,879	P1S	219.00	1.15	23.3	91.7	21.969	575	9;11;34

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com





CLOSE-COUPLED PUMP THREE PHASE

JP - ODP - AEGIS® Ring

HP	KW	RPM	Frame Size	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff. (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	1800	143/5JP	00118OT3E143JP-SG	626	P1S	39.00	1.15	1.51	85.5	16.772	208-230/460	9;11;34
1.5	1.1	3600	143/5JP	00156OT3E143JP-SG	674	P1S	34.00	1.15	1.85	84.0	16.772	208-230/460	9;11;34
		1800	143/5JP	00158OT3E145JP-SG	693	P1S	47.00	1.15	2.07	86.5	17.559	208-230/460	9;11;34
2	1.5	1800	143/5JP	00218OT3E145JP-SG	747	P1S	44.00	1.15	2.69	86.5	17.559	208-230/460	9;11;34
		3600	143/5JP	00236OT3E145JP-SG	720	P1S	42.00	1.15	2.42	85.5	17.165	208-230/460	9;11;34
3	2.2	1800	182/4JP	00318OT3E182JP-SG	835	P1S	73.00	1.15	3.86	89.5	19.705	208-230/460	9;11;34
		3600	143/5JP	00336OT3E145JP-SG	800	P1S	45.00	1.15	3.59	85.5	17.559	208-230/460	9;11;34
5	3.7	1800	182/4JP	00518OT3E184JP-SG	1,019	P1S	87.00	1.15	6.33	89.5	20.886	208-230/460	9;11;34
		3600	182/4JP	00536OT3E182JP-SG	962	P1S	66.00	1.15	6.10	86.5	19.331	208-230/460	9;11;34
7.5	5.5	1800	213/5JP	00718OT3E213JP-SG	1,320	P1S	128.00	1.15	9.14	91.0	21.575	208-230/460	9;11;34
		1800	213/5JP	00718OT3H213JP-SG	1,320	P1S	128.00	1.15	7.31	91.0	21.575	575	9;11;34
		1800	213/5JP	00718OT3V213JP-SG	1,320	P1S	128.00	1.15	10.5	91.0	21.575	200/400	9;11;34
		3600	182/4JP	00736OT3E184JP-SG	1,256	P1S	77.00	1.15	8.67	88.5	19.705	208-230/460	9;11;34
10	7.5	1800	213/5JP	01018OT3E215JP-SG	1,566	P1S	149.00	1.15	12.4	91.7	22.756	208-230/460	9;11;34
		1800	213/5JP	01018OT3H215JP-SG	1,566	P1S	149.00	1.15	9.90	91.7	22.756	575	9;11;34
		1800	213/5JP	01018OT3V215JP-SG	1,566	P1S	149.00	1.15	14.2	91.7	22.756	200/400	9;11;34
		3600	213/5JP	01036OT3E213JP-SG	1,489	P1S	128.00	1.15	12.0	89.5	21.969	208-230/460	9;11;34
		3600	213/5JP	01036OT3H213JP-SG	1,489	P1S	128.00	1.15	9.60	89.5	21.969	575	9;11;34
15	11	1800	254/6JP	01518OT3E254JP-SG	2,275	P1S	220.00	1.15	18.3	93.0	24.843	208-230/460	9;11;34
		3600	213/5JP	01536OT3E215JP-SG	1,907	P1S	143.00	1.15	17.2	90.2	22.756	208-230/460	9;11;34
		3600	213/5JP	01536OT3H215JP-SG	1,907	P1S	143.00	1.15	13.8	90.2	22.756	575	9;11;34
20	15	1800	254/6JP	02018OT3E256JP-SG	2,693	P1S	243.00	1.15	24.7	93.0	24.843	208-230/460	9;11;34
		3600	254/6JP	02036OT3E254JP-SG	2,387	P1S	196.00	1.15	23.8	91.0	24.843	208-230/460	9;11;34
25	18.5	3600	254/6JP	02536OT3E256JP-SG	2,879	P1S	219.00	1.15	29.1	91.7	24.843	208-230/460	9;11;34

Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

- Models in green text are NEMA Premium compliant
- Shaded models are being discontinued once inventory is depleted

1	1.0 Service Factor
2	Aluminum Frame with Removable Feet
3	Automatic Reset Thermal Overload Protector
4	Manual Reset Thermal Overload Protector
5	CCW Rotation Viewed from Shaft End - Non Reversible
6	Compressor Duty
7	F2 Mount
8	F3 Mount
9	Rolled Steel Frame
10	Not Thermally Protected
11	Product Might Not be Available in Stock
12	Reduced Frame
13	Resilient Base
14	Roller Bearing
15	Round Body - Drip Cover Included
16	Split-Phase Motor
17	TENV - Totally Enclosed Non Ventilated
18	Z-Frame; Bigger Shaft Diameter and Bearings
19	105K Tempature Rise
20	Round Body - Drip Cover NOT Included
21	Stainless Steel Body
22	Two Speed - Double Windings
23	Two Speed - Single Winding
24	Not readily available. Usually ships in two weeks
25	Brake rectifier suitable for 230VAC
26	Brake rectifier suitable for 460VAC
27	For Export Only. Non-compliant with Energy Independence & Security Act of 2007 (EISA 2007)
28	ODP Fan Cooled
29	Standard Efficiency
30	High Efficiency (EPACT)
31	Rating is suitable for 1.0SF @ 50Hz. Also suitable for next lower HP @ 1.15SF 50Hz
32	Suitable for 1.15SF @ 50°C ambient
33	Suitable for 380V 60Hz when wired as YY (double WYE)
34	AEGIS® Installed
35	AEGIS® ring installation reduces the available "N-W" length
36	Super Premium
37	Design A

USA.RS.2015

WEG Electric Corp.
6655 Sugarloaf Parkway
Duluth, GA 30097
Phone: 1-800-ASK-4WEG (275-4934)
www.weg.net/us

Please contact your authorized distributor:

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP