ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *WinSystems PCM-MIO-G-1* at our website: *Click HERE*

PCM-MIO-G

PC/104 Data Acquisition Module Including 16-Bit ADC, 12-Bit DAC, and 48 Digital I/O

Features

Analog Inputs

- 16-bit Analog-to-Digital converter (ADC) with sample-and-hold circuit
- Input ranges: 0-5V, 0-10V, ±5V, and ±10V
- Any combination up to 16 single-ended or eight differential input channels
- Each channel independently software programmable for input type and range
- ±25V input protection on each channel
- No missing codes over full range
- Low-noise DC/DC reference for accuracy
- Programmable interrupt and DMA support

Analog Outputs

- Eight, 12-bit Digital-to-Analog converters (DAC)
- Output ranges: 0-5V, 0-10V, ±2.5V, ±5V, ±10V, and -2.5V to 7.5V
- Each channel independently software programmable
- Output channels can be updated and cleared individually or simultaneously

Digital Inputs/Outputs

- 48 Bidirectional lines with Input, Output or Output with Readback, 24 capable of event-sense interrupt generation
- 12mA sink current per line

General

- No calibration required
- Standard 0.100" headers for easy cable access
- Operating temperature: -40° to +85°C
- +5VDC operation
- 3.6 x 3.8 Inches (90 x 96mm)
- Custom OEM configurations available
- Compatible with industry-standard I/O racks



Product Description

The PCM-MIO-G is a versatile, PC/104-based analog input, analog output, and digital I/O board designed for high-accuracy and high-channel count analog and digital I/O. The board is based upon Linear Technologies' precision converters and voltage references which require no external calibration. The digital I/O utilizes WinSystems' versatile WS16C48 implementation, also available on many of our SBCs and other I/O products.

Analog Input Section - Two analog-to-digital converters (ADCs) are used on the board. Each contains an 8-channel multiplexer with ±25V protection. The multiplexer on each ADC can be programmed for single-ended inputs or pairs of differential inputs or combinations of both. The precision trimmed attenuators ensure accurate input ranges. All channels are fault protected so that a problem on one channel will not affect the conversion result of another channel.

The PCM-MIO-G supports four input voltage ranges. Any input range is independently software selectable for each channel. No jumpers are required.

The board will support up to 16 single-ended input channels, eight differential input channels or various combinations of both. This means that under software control, any channel can be set for either single-ended or differential along with its voltage range.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

PCM-MIO-G: ADC, DAC, and DIO PC/104 Module

Analog Output Section - The PCM-MIO uses two Linear Technologies SoftSpan™ quad Digital-to-Analog converters (DACs). They are software programmable for either unipolar or bipolar mode plus specific voltage range on a per channel basis.

There are eight independent, 12-bit, D/A channels, each with six programmable output voltage ranges. They are asynchronously cleared to 0V for all ranges when reset.

Digital Input/Output Section - The PCM-MIO-G contains WinSystems' highly-versatile WS16C48, 48-line digital I/O controller. There are 48 bits of bidirectional digital I/O. Each I/O line is individually programmable for input, output, or output with readback operation. Each output channel is latched and has an open collector driver (with a pull-up resistor) capable of sinking 12mA of current. This allows direct control of up to 48 opto-isolated signal conditioning modules.

The major feature of the WS16C48 controller is its ability to monitor the 24 of lines of Port 0, 1, and 2 for either rising or falling digital edge transitions, latch them and then interrupt the host processor notifying it that a change-of-input status has occurred. Transition polarity is programmable and enabled on a bit-by-bit basis. Each line's transition is latched.

The pinout is compatible with the industry-standard I/O module mounting racks and WinSystems' termination cards.


PC/104 Interface - The PCM-MIO is I/O mapped, requiring 32 sequential port addresses. The addresses are jumper selectable on any even 32-port boundary. The control, data, and power signals are wired to a 16-bit stackthrough PC/104 connector.

DMA - Direct Memory Access is supported for 8-bit command and 16-bit data transfers for both A/D and D/A. A DOS driver is available that supports DMA.

Custom OEM Configurations - WinSystems can populate this board to meet special OEM applications. Please contact an Applications Engineer with your requirements.

WinSystems reserves the right to make changes to products and/or documentation without further notification.

Product names of other companies may be trademarks of their respective companies.

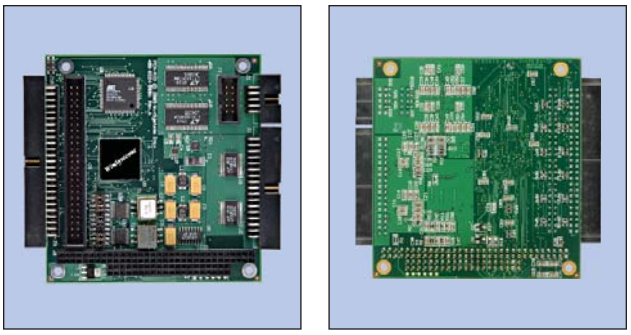

Front and Back Picture of PCM-MIO-G

Technical Specifications

Electrical

PC/104 Bus	16-bit, stackthrough
Voltage	+5V ±5% @ 500mA (typ.) All outputs unloaded.

A/D Section

Input	Up to 16 single-ended or 8 differential
Range	0-5V, 0-10V, ±5V, and ±10V
Resolution	16-bits
Input Impedance	42kohm (typ.) unipolar mode 31kohm (typ.) bipolar mode

D/A Section

Output	Eight channels
Range	0-5V, 0-10V, ±2.5V, ±5V, ±10V, and -2.5V to 7.5V
Resolution	12-bits, no missing codes
Settling Time	2µS to 0.1% full scale step
Output Current	±10mA per output typical with ±30mA maximum per board

Digital I/O

Type	48-bits organized in six, 8-byte segments
Logic	TTL-compatible with 12mA sink for each pin

Environmental

Operational from -40° to +85°C
RoHS compliant

Mechanical

Dimensions	3.6 x 3.8 inches (90 x 96mm)
Weight	3.08 oz. (87.32 gm)

Ordering Information

(See website for complete ordering information and accessories.)

PCM-MIO-G-1	16-bit A/D, 12-bit D/A, and 48 digital I/O lines

WinSystems®
An Employee-Owned Company

WinSystems | 715 Stadium Drive, Arlington, TX 76011 USA | Tel 817-274-7553 | Info@WinSystems.com | www.WinSystems.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP