ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Ametek / Xantrex / Sorensen XFR 60-46* at our website: *Click HERE*

Sorensen XFR Series

1.2–2.8 kW

Low Profile DC Power Supply with Zero Voltage "Soft Switching"

6–600 V

2–300 A

- Analog programming
- Zero voltage "soft switching"
- Constant voltage or constant current operation with automatic crossover and mode indication
- Standby/Remote/Local modes
- Front panel button preview of voltage, current, OVP
- Remote sense, 5 V line loss compensation
- LabVIEW® and LabWindows® drivers



~	110	208	230
≋		208	230

GPIB RS232

The Sorensen XFR Series provides 1.2 kilowatts and 2.8 kilowatts of power for research, product development, and production test applications such as magnet control, ATE, process control, electroplating and burn-in. The XFR Series is ideal for OEM applications where high power and a wide adjustment of output voltage or current is required.

The XFR Series is designed for excellent thermal management so each unit can be conveniently stacked in rack mounts without leaving ventilation space between each unit.

The XFR Series features zero voltage "soft switching" which virtually eliminates switching transients, resulting in lower noise performance that is closer to linear levels. Soft switching also increases efficiency, decreases heat generation, and reduces stress on the switching transistors – resulting in higher reliability.

AMETEK
Programmable Power
9250 Brown Deer Road
San Diego, CA 92121-2267
USA

AMETEK®
PROGRAMMABLE POWER

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

XFR Series : Product Specifications

Common		
Switching Frequency	XFR 2.8 kW: Nominal 31 kHz (62 kHz output ripple) XFR 1.2 kW: 6 V to 40 V models: nominal 78 kHz (156 kHz output ripple); 60 V to 600 V models: nominal 62.5 kHz (125 kHz output ripple).	
Time Delay	7 sec maximum from power on until output stable	
Voltage Mode Transient Response Time	< 3 ms for output voltage to recover within 0.5% of its rated voltage after a step change in load current of up to 10% to 90% of rated output	
Maximum Voltage Differential	±600 Vdc from output to safety ground	
Remote Start/Stop and Interlock	2.5-15 V signal or TTL-compatible input, selectable logic	
Remote Analog Programming	Voltage and current programming inputs (source must be isolated): 0-5 k, 0-10 k resistances; 0-5 V, 0-10 V (default) voltage sources	
Remote Analog Monitoring	Voltage and current monitor outputs 0-5 V, 0-10 V (default) ranges for 0-100% of output	
Remote Programming & Monitoring Accuracy	1% zero to full scale output for the default range	
Maximum Remote Sense Line Drop Compensation	5 V / line (Line drop is subtracted from total voltage available at supply output.)	
Front Panel Voltage and Current Control	10-turn voltage and current potentiometers	
Front Panel Voltage Control Resolution	0.02% of maximum voltage	
Main Output Connector	XFR 2.8 kW: 7.5 - 100 V models: nickel-plated copper bus bars with bus bar cover and strain relief; 150V to 600 V models: 4-terminal, wire clamp connector with cover and strain relief; XFR 1.2 kW: 6 - 40 V models: nickel-plated copper bus bars with bus bar shield; 60 - 600 V models: 4-terminal wire clamp connector with strain relief	
Approvals	CE-marked units meet: EN61010-1, EN61000-6-2 and EN61000-6-4; UL Listed to UL3111-1; CSA certified to CSA C22.2 No 1010.1 Meets USA EMC standard: FCC, part 15B, Class A; Meets Canadian EMC standard: ICES-001, Class A.	
Input		
Input Voltage Ranges	XFR 2.8 kW: 190-264 Vac, 1ϕ (24.3 A @ 208 Vac; 20.5 A @ 230 Vac typical), 47-63 Hz; Option: M2 3ϕ 208 Vac input XFR 1.2 kW: 85-130 Vac or 190-264 Vac, 1ϕ (17 A @ 120 Vac; 8.8 A @ 230 Vac typical), 47-63 Hz. Automatic range detect.	
AC Input Connector	Type 3-terminal, 34 A, 250 V, wire clamp connector with strain relief cover	
Protection Features		
Over-voltage protection		
Over-temperature protection		
Environmental		
Operating Temperature	XFR 2.8 kW: 0 to 50°C, XFR 1.2 kW: 0 to 50°C; 6 V model: for rack mounted units, derate output current by 1.5 A per °C for operating temperatures between 30 - 50°C	
Storage Temperature	-20°C to 70°C	
Humidity (Non-condensing)	Up to 90% RH, non-condensing	
Physical	**XFR 2.8 kW**	**XFR 1.2 kW**
Dimensions	Width: 19" (429.4 mm) Height: 3.5" (88.9 mm) Depth: 21" (533.5 mm)	Width: 19" (429.4 mm) Height: 1.7" (43.2 mm) Depth: 20" (508.1 mm)
Weight	33 lb (15 kg)	18 lb (8.2 kg)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Model	Output Voltage	Output Current	Output Power	Line Regulation[2]	
				Voltage	Current
XFR 7.5-300	0-7.5 V	0-300 A	2250 W	2.75 mV	32 mA
XFR 12-220	0-12 V	0-220 A	2640 W	3.2 mV	24 mA
XFR 20-130	0-20 V	0-130 A	2600 W	4 mV	15 mA
XFR 33-85	0-33 V	0-85 A	2805 W	5.3 mV	10.5 mA
XFR 40-70	0-40 V	0-70 A	2800 W	6 mV	9 mA
XFR 60-46	0-60 V	0-46 A	2760 W	8 mV	6.6 mA
XFR 100-28	0-100 V	0-28 A	2800 W	12 mV	4.8 mA
XFR 150-18	0-150 V	0-18 A	2700 W	17 mV	3.8 mA
XFR 300-9	0-300 V	0-9 A	2700 W	32 mV	2.9 mA
XFR 600-4	0-600 V	0-4 A	2400 W	62 mV	2.4 mA
XFR 6-200	0-6 V	0-200 A[8]	1200 W	2.6 mV	22 mA
XFR 7.5-140	0-7.5 V	0-140 A	1050 W	2.75 mV	16 mA
XFR 12-100	0-12 V	0-100 A	1200 W	3.2 mV	12 mA
XFR 20-60	0-20 V	0-60 A	1200 W	4 mV	8 mA
XFR 35-35	0-35 V	0-35 A	1225 W	5.5 mV	5.5 mA
XFR 40-30	0-40 V	0-30 A	1200 W	6 mV	5 mA
XFR 60-20	0-60 V	0-20 A	1200 W	8 mV	4 mA
XFR 100-12	0-100 V	0-12 A	1200 W	12 mV	3.2 mA
XFR 150-8	0-150 V	0-8 A	1200 W	17 mV	2.8 mA
XFR 300-4	0-300 V	0-4 A	1200 W	32 mV	2.4 mA
XFR 600-2	0-600 V	0-2 A	1200 W	62 mV	2.2 mA

Model	Load Regulation[3]		Meter Accuracy	
	Voltage	Current	Voltage (1% of Vmax + 1 count)	Current (1% of Imax + 1 count)
XFR 7.5-300	6.5 mV	65 mA	0.09 V	4 A
XFR 12-220	7.4 mV	49 mA	0.13 V	2.3 A
XFR 20-130	9 mV	31 mA	0.3 V	1.4 A
XFR 33-85	11.6 mV	22 mA	0.43 V	0.95 A
XFR 40-70	13 mV	19 mA	0.5 V	0.8 A
XFR 60-46	17 mV	14.2 mA	0.7 V	0.56 A
XFR 100-28	27 mV	10.6 mA	1.1 V	0.38 A
XFR 150-18	35 mV	8.6 mA	1.6 V	0.19 A
XFR 300-9	65 mV	6.8 mA	4 V	0.1 A
XFR 600-4	125 mV	5.8 mA	7 V	0.05 A
XFR 6-200	8.2 mV	45 mA	0.07 V	2.5 A
XFR 7.5-140	6.5 mV	33 mA	0.09 V	1.5 A
XFR 12-100	7.4 mV	25 mA	0.13 V	1.1 A
XFR 20-60	9 mV	17 mA	0.3 V	0.7 A
XFR 35-35	12 mV	12 mA	0.4 V	0.45 A
XFR 40-30	13 mV	11 mA	0.5 V	0.4 A
XFR 60-20	17 mV	9 mA	0.7 V	0.3 A
XFR 100-12	27 mV	7.4 mA	1.1 V	0.13 A
XFR 150-8	35 mV	6.6 mA	1.6 V	0.09 A
XFR 300-4	65 mV	5.8 mA	4 V	0.05 A
XFR 600-2	125 mV	5.4 mA	7 V	0.03 A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Model	Output Noise (0-20MHz)	Output Ripple (rms)	
	Voltage (p-p)	Voltage	Current
XFR 7.5-300	100 mV	10 mV	1600 mA
XFR 12-220	100 mV	10 mV	1200 mA
XFR 20-130	100 mV	10 mV	400 mA
XFR 33-85	100 mV	15 mV	300 mV
XFR 40-70	150 mV	15 mV	200 mA
XFR 60-46	150 mV	15 mV	100 mA
XFR 100-28	175 mV	25 mV	80 mA
XFR 150-18	200 mV	25 mV	40 mA
XFR 300-9	400 mV	40 mV	20 mA
XFR 600-4	500 mV	100 mV	10 mA
XFR 6-200	75 mV	9 mV	750 mA
XFR 7.5-140	75 mV	9 mV	500 mA
XFR 12-100	75 mV	9 mV	500 mA
XFR 20-60	75 mV	9 mV	500 mA
XFR 35-35	120 mV	9 mV	300 mA
XFR 40-30	150 mV	9 mV	200 mA
XFR 60-20	150 mV	9 mV	100 mA
XFR 100-12	150 mV	9 mV	100 mA
XFR 150-8	150 mV	18 mV	50 mA
XFR 300-4	200 mV	27 mV	25 mA
XFR 600-2	400 mV	72 mV	15 mA

Model	Drift (8 hours)[4]		Temp Coeffcient[5]	
	Voltage (0.5% of Vmax)	Current (0.05% of Imax)	Voltage (0.02% of Vmax °C)	Current (0.03% of Vmax °C)
XFR 7.5-300	3.75 mV	150 mA	1.5 mV	90 mA
XFR 12-220	6 mV	110 mA	2.4 mV	66 mA
XFR 20-130	10 mV	65 mA	4 mV	39 mA
XFR 33-85	16.5 mA	42.5 mA	6.6 mV	25.5 mA
XFR 40-70	20 mV	35 mA	8 mV	21 mA
XFR 60-46	30 mV	23 mA	12 mV	13.8 mA
XFR 100-28	50 mV	14 mA	20 mV	8.4 mA
XFR 150-18	75 mV	9 mA	30 mV	5.4 mA
XFR 300-9	150 mV	4.5 mA	60 mV	2.7 mA
XFR 600-4	300 mV	2 mA	120 mV	1.2 mA
XFR 6-200	3 mV	200 mA	1.2 mV	60 mA
XFR 7.5-140	3.75 mV	70 mA	1.5 mV	42 mA
XFR 12-100	6 mV	50 mA	2.4 mV	30 mA
XFR 20-60	10 mV	30 mA	4 mV	18 mA
XFR 35-35	17.5 mV	17.5 mA	7 mV	10.5 mA
XFR 40-30	20 mV	15 mA	8 mV	9 mA
XFR 60-20	30 mV	10 mA	12 mV	6 mA
XFR 100-12	50 mV	6 mA	20 mV	3.6 mA
XFR 150-8	75 mV	4 mA	30 mV	2.4 mA
XFR 300-4	150 mV	2 mA	60 mV	1.2 mA
XFR 600-2	300 mV	1 mA	120 mV	0.6 mA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Model	Program Slew Rate[6]		OVP Adjustment Range (5% to 110% of Vmax)	Efficiency[7]
	Rise time	Fall time		
XFR 7.5-300	100 ms	100 ms	0.375-8.25 V	80%
XFR 12-220	100 ms	100 ms	0.6-13.2 V	82%
XFR 20-130	100 ms	100 ms	1-22 V	85%
XFR 33-85	100 ms	100 ms	1.65 - 36.6 V	85%
XFR 40-70	100 ms	100 ms	2-44 V	87%
XFR 60-46	100 ms	100 ms	3-66 V	90%
XFR 100-28	170 ms	170 ms	5-110 V	90%
XFR 150-18	170 ms	170 ms	7.5-165 V	90%
XFR 300-9	170 ms	170 ms	15-330 V	91%
XFR 600-4	170 ms	100 ms	30-660 V	91%
XFR 6-200	100 ms	100 ms	0.3-6.6 V	75%
XFR 7.5-140	100 ms	100 ms	0.375-8.25 V	78%
XFR 12-100	100 ms	100 ms	0.6-13.2 V	81%
XFR 20-60	100 ms	100 ms	1-22 V	81%
XFR 35-35	100 ms	100 ms	1.75-38.5 V	83%
XFR 40-30	100 ms	100 ms	2-44 V	83%
XFR 60-20	100 ms	100 ms	3-66 V	86%
XFR 100-12	170 ms	170 ms	5-110 V	84%
XFR 150-8	170 ms	170 ms	7.5-165 V	84%
XFR 300-4	170 ms	170 ms	15-330 V	85%
XFR 600-2	170 ms	170 ms	30-660 V	85%

Interface Specifications with RS-232 or GPIB Interface Installed*


Model	Program Accuracy			Readback Accuracy	
	Voltage (mV)	Current (mA)	OVP (mV)	Voltage (mV)	Current (mA)
XFR 7.5-300	10 +0.12%	900 +0.15%	40	30 +0.12%	900 +0.1%
XFR 12-220	75 +0.12%	750 +0.15%	75	75 +0.12%	750 +0.1%
XFR 20-130	75 +0.12%	500 +0.15%	100	75 +0.2%	500 +0.1%
XFR 33-85	75 +0.3%	425 +0.1%	175	75 +0.3%	425 +0.1%
XFR 40-70	75 +0.3%	350 +0.15%	200	75 +0.3%	350 +0.1%
XFR 60-46	150 +0.3%	250 +0.1%	300	150 +0.35%	250 +0.1%
XFR 100-28	150 +0.35%	140 +0.15%	500	150 +0.35%	140 0.1%
XFR 150-18	225 +0.35%	120 +0.1%	750	225 +0.35%	120 +0.1%
XFR 300-9	225 +0.35%	80 +0.1%	1500	225 +0.35%	80 +0.1%
XFR 600-4	300 +0.35%	80 +0.1%	3000	300 +0.35%	80 +0.1%
XFR 6-200	10 +0.12%	500 +0.12%	30	30 +0.12%	500 +0.1%
XFR 7.5-140	10 +0.12%	500 +0.1%	40	30 +0.12%	500 +0.1%
XFR 12-100	75 +0.12%	460 +0.1%	75	75 +0.12%	460 +0.1%
XFR 20-60	75 +0.12%	250 +0.1%	100	75 +0.12%	250 +0.1%
XFR 35-35	75 +0.3%	200 +0.1%	175	75 +0.12%	200 +0.1%
XFR 40-30	75 +0.3%	150 +0.15%	200	75 +0.12%	150 +0.1%
XFR 60-20	150 +0.25%	120 +0.1%	400	150 +0.25%	120 +0.1%
XFR 100-12	150 +0.35%	80 +0.1%	500	150 +0.35%	80 +0.1%
XFR 150-8	225 +0.35%	80 +0.1%	750	225 +0.1%	80 +0.1%
XFR 300-4	225 +0.35%	80 0.1%	1500	225 +0.1%	80 +0.1%
XFR 600-2	300 +0.35%	75 +0.1%	3000	300 +0.1%	75 +0.1%

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

XFR Series : Diagram

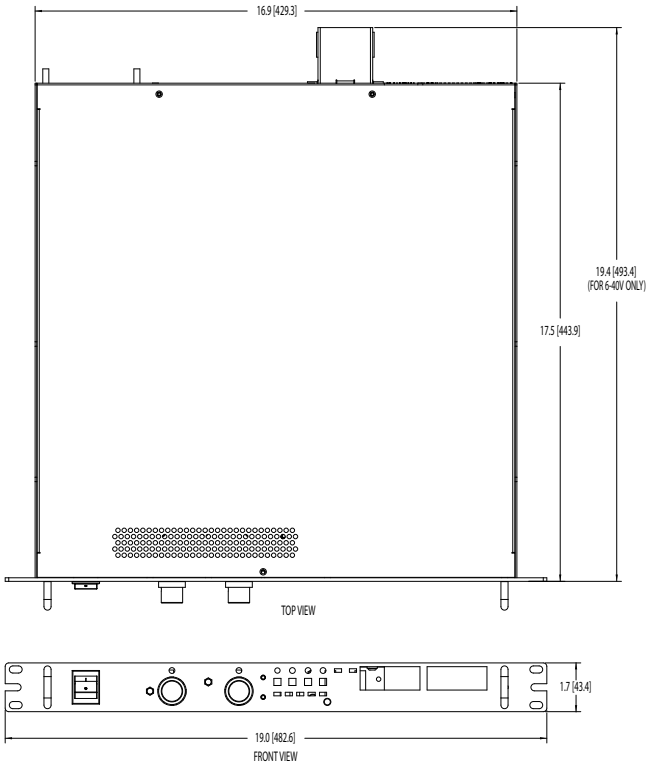


XFR 1.2

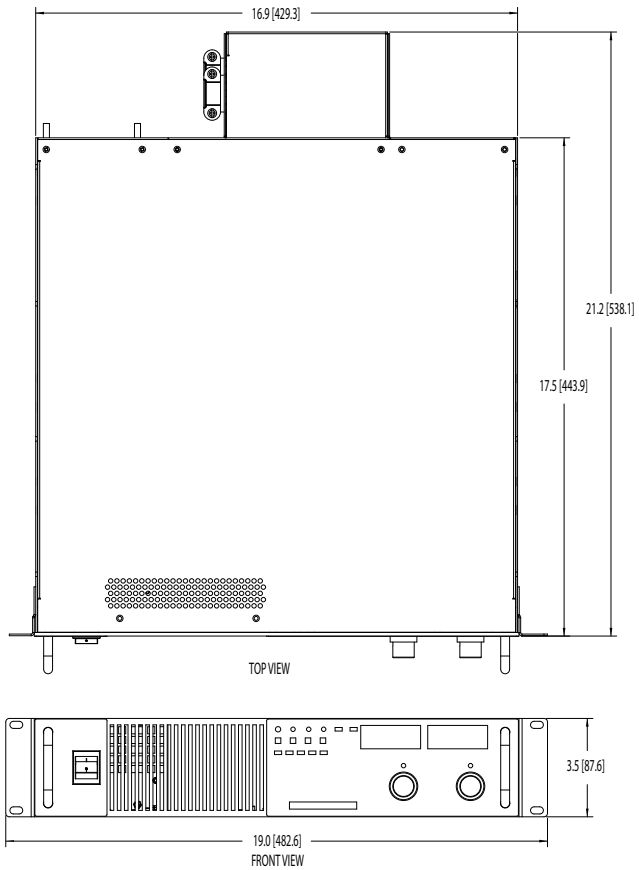

XFR 2.8

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Model Number Description

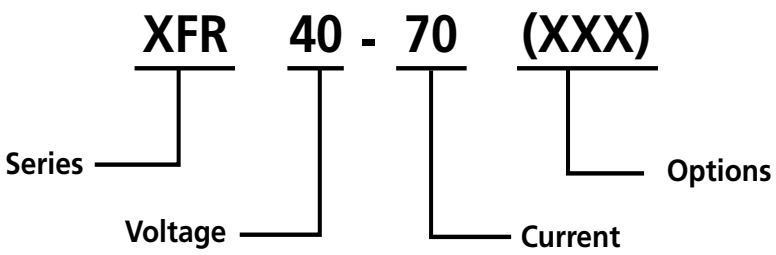

XFR 2.8 Options and Accessories	
MGA / MGB*	GPIB / IEEE 488.1
MGP	Multi-channel GPIB / IEEE 488.2
MCA	CANbus interface for hardware linking multiple units (used with GPIB-M)
MRA	RS-232 interface
MIA	ISOL interface card provides isolated analog control and readback
M2	3-phase 208 Vac input

XFR 1.2 Options and Accessories	
MGA / MGB*	GPIB / IEEE 488.1
MGP	Multi-channel GPIB / IEEE 488.2
MCA	CANbus interface for hardware linking multiple units (used with GPIB-M)
MRA	RS-232 interface
MIA	ISOL interface card provides isolated analog control and readback
RM-XFR	19 inch Rack Mount Kit

Specifications subject to change without notice.

1. Specifications indicate typical performance at 25°C ±5°C, nominal line input of 208 Vac for the 2.8 or 120 Vac for the 1.2.
2. For input voltage variation over the AC input voltage range, with constant rated load.
3. For 0-100% load variation, with constant nominal line voltage.
4. Maximum drift over 8 hours with constant line, load and temperature, after 30 minute warm-up.
5. Change in output per °C change in ambient temperature, with constant line and load.
6. Measured with stepped 0-10 V analog programming source and a resistive load.
7. Typical efficiency at nominal input voltage and rated output power.
8. Apply accuracy specifications according to the following voltage program accuracy example:
   Set a model 20-130 power supply to 10 V. The expected result will be within the range of 10 V ± 75 mV ± 0.12% of the set voltage of 10 V.

* MGB 600V output only. MGA for output less than 600V

© 2009 AMETEK Programmable Power All rights reserved. AMETEK Programmable Power is the trademark of AMETEK Inc., registered in the U.S. and other countries.
Elgar, Sorensen, California Instruments, and Power Ten are trademarks of AMETEK Inc., registered in the U.S.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Notes

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP