

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

ECE60 series

XP Power

60W ENCAPSULATED PCB MOUNT

AC-DC power supplies

The ECE60 series as standard is an encapsulated PCB mount device, it can also be supplied in an encapsulated chassis mount package with screw terminals (-S option), also available with a DIN rail mounting (-SD option).

With approvals to world-wide safety standards, compliance with class B for conducted & radiated emissions and a 20%, 30s peak load capability.

Not requiring any external components, these class II isolation parts benefit system designers with easy integration into a wide range of applications.



Features

- 60W convection cooled
- Regulated single outputs 3.3 to 48VDC
- Input range 85 to 264VAC
- Encapsulated PCB or chassis/DIN rail mount package
- Peak load capability
- 4.0kVAC input to output isolation
- No external components required
- -25°C to +70°C operating temperature
- Full load to +50°C
- 3 year warranty

Applications

Instrumentation

Robotics

IoT

Process control

Dimensions

ECE60/UT-P

91.4 x 38.1 x 28.0mm (3.60" x 1.50" x 1.10")

ECE60-S

113.0 x 40.0 x 28.5mm (4.45" x 1.57" x 1.12")

Documentation

For further information click the link or scan the code

→ xppower.com

Models & ratings

Model number[2,3]	Output voltage	Output current		Efficiency[4]	Output power
		Nominal	Peak[1]		
ECE60US03	3.3VDC	10.00A	13.00A	79%	33W
ECE60US05	5.0VDC	10.00A	13.00A	83%	50W
ECE60US09	9.0VDC	6.67A	8.67A	87%	60W
ECE60US12	12.0VDC	5.00A	6.50A	87%	60W
ECE60US15	15.0VDC	4.00A	5.20A	88%	60W
ECE60US24	24.0VDC	2.50A	3.25A	89%	60W
ECE60US36	36.0VDC	1.67A	2.17A	88%	60W
ECE60US48	48.0VDC	1.25A	1.63A	86%	60W

Notes:

1. Peak load lasting <30s with a maximum duty cycle of 10%, average output power not to exceed nominal power.
2. Add suffix -S to model number to denote chassis mount with screw terminal type, e.g. ECE60US12-S.
3. A screw terminal version (-S) is available with DIN Clip attached. Add suffix 'D', e.g. ECE60US24-SD. DIN Rail mounting clip is available as a separate item, order code ECE60 DIN CLIP.
4. Average of efficiencies measured at 25%, 50%, 75% & 100% load with 230VAC input.

ECE60 series

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Input voltage range	85		264	VAC	Derate load from 100% at 90 VAC to 90% at 85 VAC
	120		370	VDC	
Input frequency	47		63	Hz	
Power factor					EN61000-3-2 class A compliant
Input current		0.6		A rms	At 230 VAC
No load input power			0.3	W	12-36VAC versions
			0.5		3.3-9VAC & 48VAC versions
Inrush current		25/50		A	115/230 VAC cold start at 25°C
Earth leakage current					Class II construction no earth
Input protection	Internal T2A/250 VAC fuse				

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Output voltage	3.3		48	VDC	See models and ratings table
Initial set accuracy			±1	%	
Minimum load	No minimum load required				
Start Up Delay			2	s	
Start Up Rise Time			30	ms	
Hold up time	16			ms	At full load and 115VAC
Line regulation			±0.5	%	
Load regulation			±2	%	ECE60US03/05-S
			±1		All other models
Transient response			4	%	Recovery within 1% in less than 500 µs for a 25% load change
Ripple & noise			60	mV pk-pk	3.3-5VAC versions, 20 MHz bandwidth
			75		3.3-5VAC '-S' versions, 20MHz bandwidth, 0.1µF capacitor at output terminals
			1	% pk-pk	20MHz bandwidth all other models
Overvoltage protection	195		216	% Vnom	ECE60US03 models
	115		140		
Overload protection	110		180	%	All other models
Short circuit protection	Trip & restart (hiccup mode)				
Temperature coefficient			0.05	%/°C	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency	79	87	89	%	See models and ratings table
Isolation: input to output	3000			VAC	Input to output
Switching frequency		100		(kHz	
Power density			0.61 (10.1)	W/cm^3 (W/in^3)	
Mean time between failure		>300		khrs	MIL-HDBK-217F, +25°C GB
Weight		191 (0.42)		g (lbs)	ECE60
		200 (0.44)			ECE60-S

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Operating temperature	-40		+70	°C	Some specification parameters may not met below -25 °C. Derate linearly from 100% load at +50 °C to 50% load at 70 °C.
Storage temperature	-40		+85	°C	
Cooling	Convection-cooled				
Humidity			95	%RH	Non-condensing
Operating altitude			5000	m	
Vibration	2g, 10 Hz to 500 Hz, 10 mins/cycle, 60 mins each cycle				

Emissions - EMC

Phenomenon	Standard	Test level	Notes & conditions
Conducted	EN55032	Class B	
Radiated	EN55032	Class B	
Harmonic current	EN61000-3-2	Class A	
Voltage flicker	EN61000-3-3		

Emissions - Immunity


Phenomenon	Standard	Test Level	Criteria	Notes & conditions
ESD immunity	EN61000-4-2	3	A	
Radiated immunity	EN61000-4-3	10 V/m, 80% mod	A	
EFT/burst	EN61000-4-4	3	A	
Surge	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	3	A	
Dips and interruptions	EN61000-4-11	100% for 10ms	A	DIP
		30% for 500ms	A	DIP
		100% for 5000ms	B	INT

Safety approvals


Certification	Standard	Notes & Ccnditions
CB	IEC60950-1:2005 Ed 2 / IEC62368-1:2014	
UL	UL62368-1 & CAN/CSA C22.2 No. 62368- 1-14	
EN	EN62368-1:2014/A11:2017	
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

Mechanical details

Encapsulated (-E)

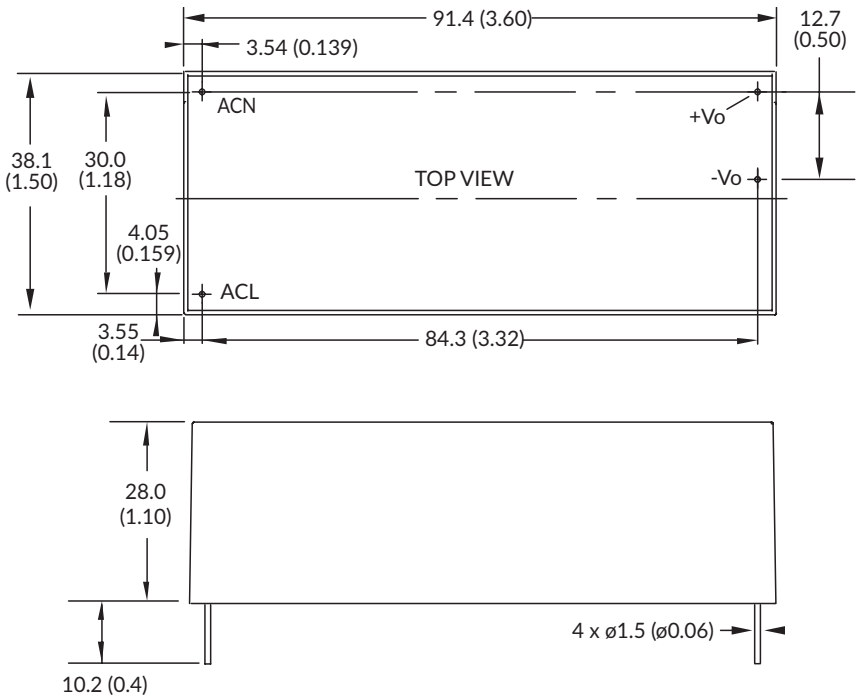

Screw terminal (-S)

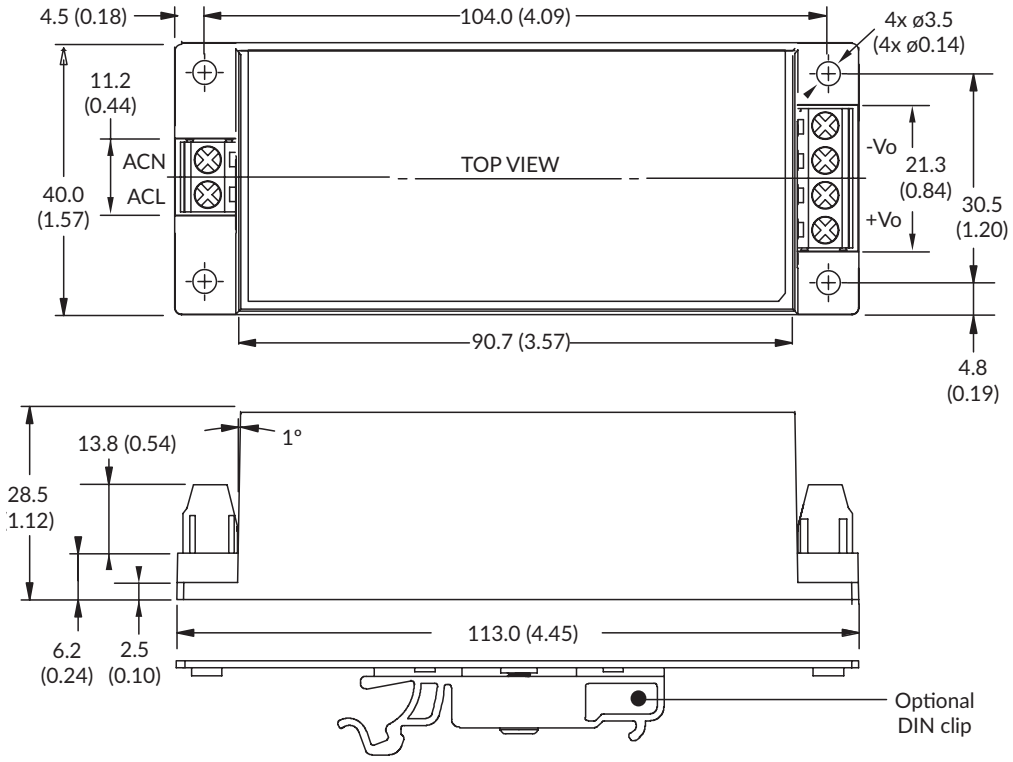

Notes:

1. All dimensions in mm (inches).
2. Weight: ECE60: 191g (0.42lbs) ECE60-S: 200g (0.44lbs)
3. Tolerances: x.xx (x.x) = ±0.5 (±0.02). x.xxx (x.xx) = ±0.25 (±0.01)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP