

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

130 Watts
JPS Series



- High Efficiency – up to 90%
- Medical Approval (JPS130–M Versions)
- 3”x 5”Footprint
- 100 W Convection–cooled
- 130 W Forced–cooled
- Single & Multi Outputs
- 3 Year Warranty

Specification

Input

Input Voltage	• 90-264 VAC (130-370 VDC)
Input Frequency	• 47-63 Hz
Input Current	• 2.0/1.0 A max at 115/230 VAC (JPS130) 2.6/1.3 A max at 115/230 VAC (JPS130-M)
Inrush Current	• 30 A at 115 VAC, 60 A at 230 VAC, cold start at 25 °C
Power Factor	• 0.9 typical
Earth Leakage Current	• 1.5 mA max at 264 VAC/60 Hz (JPS130) 260 µA max at 275 VAC/63 Hz (JPS130-M)
Input Protection	• JPS130 internal T3.15 A/250 VAC fused line, JPS130-M fused line & neutral

Output

Output Voltage	• See table
Output Voltage Trim	• ±10% on single output models, ±5% on multi output models, auxiliary outputs will track by the same percentage
Initial Set Accuracy	• At 60% rated load ±1% single outputs, ±3% on V1 for multi outputs
Minimum Load	• Single output: no minimum load required Multi-outputs: (see note 1)
Start Up Rise Time	• <20 ms
Hold Up Time	• 16 ms typical at 115 VAC & rated load (JPS130) 20 ms typical at 115 VAC & rated load (JPS130-M)
Drift	• <±0.2% after 20 mins warm up
Line Regulation	• ±0.5% Vmin to Vmax
Load Regulation	• ±1%, ±5% for auxiliary outputs, 20%-100% of rated load
Transient Response	• 4% max deviation, recovery to within 1% in 500 µs for a 25% load change
Ripple & Noise	• ±1% max pk-pk (see note 4)
Overvoltage Protection	• 110-140% Vnom on V1 only, recycle input to reset
Overload Protection	• 110-150%, auto recovery
Short Circuit Protection	• Trip & restart (hiccup mode), auto recovery
Temperature Coefficient	• 0.05%/°C
Remote Sense	• Single output models only, compensates for up to 0.5 V drop
Fan Output	• 12 V, 450 mA multi-output models only

General

Efficiency	• Up to 90% nominal line, full load
Isolation	• 3000 VAC Input to Output (JPS130), 4000 VAC Input to Output (JPS130-M 2 x MOPP), 1500 VAC Input to Ground (JPS130-M 1 x MOPP), 500 VAC Output to Ground
Switching Frequency	• 120 kHz, ±10% for both active PFC & PWM
Power Density	• 6.7 W/In^3
MTBF	• 200 kHrs to MIL-HDBK-217F at 50 °C, GB

Environmental

Operating Temperature	• 0 °C to +70 °C, (see derating curves)
Cooling	• JPS130PS03 83 W convection-cooling, 100 W, with 18 CFM airflow. All others, 100 W with convection cooling,130 W with 18 CFM airflow
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -40 °C to +85 °C (JPS130) -20 °C to +85 °C (JPS130-M)
Operating Altitude	• 3000 m

EMC & Safety

Emissions	• EN55022, Class B conducted FCC 20780, level B conducted EN60601-1-2, (JPS130-M)
Harmonic Currents	• EN61000-3-2 Class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 3 contact, level 3 air, Perf Criteria A
Radiated Immunity	• EN61000-4-3, 10 V/m Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3 Perf Criteria A
Surge	• EN61000-4-5, Installation Class 3 Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 2, Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 95% 5000 ms Perf Criteria A, B, B
Safety Approvals	• JPS130: EN60950-1, UL60950-1, CSA C22.2 No. 60950-1, CE Mark LVD, EN62368-1 JPS130-M: UL60601-1, EN60601-1, CSA C22.2 No. 601.1 CE Mark LVD.


Models and Ratings

Output Power[3]	Output Voltage	Output Current		Ripple & Noise Pk-Pk[4]	Standard Model Number	Medical Model Number
		Convection-cooled	18 CFM			
100 W	3.3 V	25.0 A	30.0 A	50 mV	JPS130PS03	
130 W	5.0 V	20.0 A	26.0 A	50 mV	JPS130PS05	JPS130PS05-M
	12.0 V	9.0 A	10.8 A	120 mV	JPS130PS12	JPS130PS12-M
	15.0 V	7.0 A	8.7 A	120 mV	JPS130PS15	JPS130PS15-M
	24.0 V	4.5 A	5.4 A	200 mV	JPS130PS24	JPS130PS24-M
	28.0 V	3.8 A	4.6 A	200 mV		JPS130PS28-M
	48.0 V	2.1 A	2.7 A	200 mV	JPS130PS48	JPS130PS48-M
130 W	+5.0 V[1]	11.5 A	15.0 A	50 mV	JPS130PT31	
	+12.0 V[2]	3.0 A	5.0 A	100 mV		
	-12.0 V[2]	0.5 A	0.5 A	100 mV		
130 W	+3.3 V[1]	10.0 A	15.0 A	50 mV	JPS130PT30	
	+5.0 V[2]	8.0 A	15.0 A	50 mV		
	+12.0 V[2]	0.5 A	0.5 A	100 mV		
130 W	+5.0 V[1]	10.0 A	15.0 A	50 mV		JPS130PT31-M
	+12.0 V[2]	3.0 A	4.1 A	120 mV		
	-12.0 V[2]	0.8 A	1.1 A	120 mV		
130 W	+5.0 V[1]	10.0 A	15.0 A	50 mV		JPS130PT32-M
	+15.0 V[2]	2.5 A	4.1 A	150 mV		
	-15.0 V[2]	0.8 A	1.1 A	150 mV		
130 W	+5.0 V[1]	2.5 A	4.0 A	50 mV		JPS130PT34-M
	+24.0 V[2]	2.8 A	4.0 A	240 mV		
	+12.0 V[2]	0.7 A	1.0 A	120 mV		

Notes

1. *20% minimum load required on V1 to maintain stated regulation for auxiliary rails.*
2. *Load regulation of auxiliary rails is defined over the range of 20%-100% of rated load.*
3. *Maximum power with 18 CFM of forced air.*
4. *Ripple and noise measured over 15 MHz bandwidth with a 47 µF electrolytic capacitor and 0.47 µF ceramic capacitor.*
5. *Covers available, order part number 'JPS130-M COVER' or add suffix '-C' to receive the unit with cover fitted. Overall dimensions 89.5 x 143.0 x 40.0 mm. For industrial units order part number 'JPS130 COVER' or add suffix '-C' to receive the unit with cover fitted. Overall dimensions 90.6 x 142.9 x 39.8 mm. Fixing screws M3, maximum penetration depth 3mm from cover outer surface.*
6. *Connector kits and cable harnesses available. Consult sales for options.*

Mechanical Details

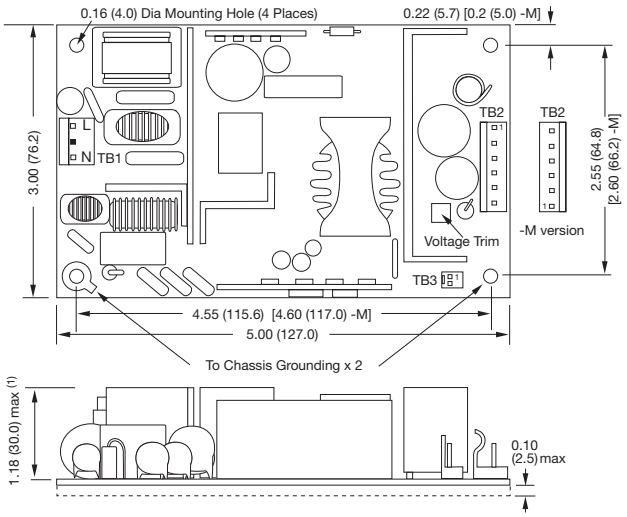

All dimensions are in inches (mm).
Tolerance: 0.02 (0.4) max.
Weight: 0.5 lbs (240 g) approx.

TB3 PIN CONNECTIONS		
Pin	Single	Multi
1	- Sense	0 V
2	+ Sense	+12 V Fan

Notes


1. Single output industrial model shown, add extra 0.08" (2.0 mm) to overall height for multi-output models. Dimensions followed by '-M' apply for medical units (note output connector orientation).
2. AC input connector (TB1): Molex 5277-02A or equivalent. Mates with 5196-N housings/5194/5225 crimps.
3. DC output connector (TB2): Molex 5273 or equivalent, mates with 5195-N housing/5194/5225 crimps and 5239-N housing/5167/5168/2478/2578 crimps. Except JPS130PS03 which has a 6-position terminal screw block: Dinkle part number EHK508V Series accepts 24-12 AWG wire. Terminal screw tightening torque 4 lbs-in (0.45 Nm) maximum.
4. TB3: Molex 5045-02A or equivalent. Mates with KK 51191 housings/50802 crimps and KK 5051 housings/2759/5159 crimps. Single output units - TB3 is remote sense. Multi-output units - TB3 is 12 V, 450 mA fan output.

JPS130-M PIN CONNECTIONS					
TB2	PS05	PS 12 - 48	PT31	PT32	PT34
1	Return	Return	-12 V	-15 V	+12 V
2	Return	Return	+12 V	+15 V	+24 V
3	Return	Return	Return	Return	Return
4	Return	+V	Return	Return	Return
5	+V	+V	Return	Return	Return
6	+V	+V	Return	Return	Return
7	+V		+5 V	+5 V	+5 V
8	+V		+5 V	+5 V	+5 V
9			+5 V	+5 V	+5 V
Type	*5273-08A	*5273-06A	*5273-09A		

JPS130 PIN CONNECTIONS				
TB2	PS05	PS03, 12 - 48	PT31	PT30
1	+V	+V	+5 V	+3.3 V
2	+V	+V	+5 V	+3.3 V
3	+V	+V	+5 V	Return
4	+V	Return	Return	Return
5	Return	Return	Return	Return
6	Return	Return	Return	Return
7	Return		Return	Return
8	Return		+12 V	+5 V
9			-12 V	+5 V
10				+12 V
Type	*5273-08A	*5273-06A	*5273-09A	*5273-10A

* Note: MOLEX connector type

Derating Curves

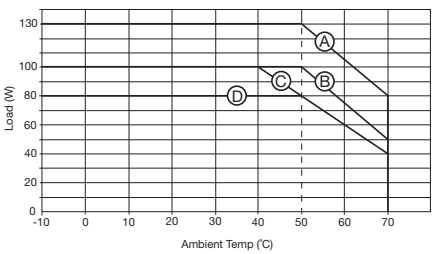

Ⓐ JPS130 and '-M' with 18 CFM fan (except JPS130PS03).

Ⓑ JPS130PS12, PS15, PS24 and PS48 and '-M' with convection cooling. JPS130PS03 with 18 CFM fan.

Ⓒ JPS130PS05, PT30, PT31, PT32 and PT34 and '-M' with convection cooling.

Ⓓ JPS130PS03 with convection cooling.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP