ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *XP Power RCL175PS24-F* at our website: *Click HERE*

175 Watts

RCL175 Series



- 200 W Peak Rating
- Up to 120 W Convection-cooled
- Industrial and Medical Approvals
- Low Leakage Current
- Class I & Class II Applications
- Flexible Design for Modified Standards
- Connector & Mechanical Options

Specification

Input

Input Voltage	• 85-264 VAC (120-370 VDC) See note 3
Input Frequency	• 47-63 Hz
Input Current	• 2.1 A max at 115 VAC 0.9 A max at 230 VAC
Inrush Current	• 17 A max at 115 VAC, 35 A max at 230 VAC, cold start at +25 °C
Power Factor	• Complies with EN61000-3-2 for Class A equipment
Earth Leakage Current	• 120 µA max at 115 VAC 200 µA max at 230 VAC
Input Protection	• 3.15 A line and neutral fused

Output

Output Voltage	• See models and ratings table
Output Voltage Trim	• ±10% output 1 via pot, outputs 2-4 track by same percentage
Initial Set Accuracy	• ±2% of nominal at 50% load
Minimum Load	• See models & ratings table
Start Up Delay	• <2 s
Start Up Rise Time	• <100 ms
Hold Up Time	• 20 ms min at nominal low line & maximum power
Drift	• <±0.2% after 20 mins warm up
Line Regulation	• ±0.5% of nominal over full input range
Load Regulation	• PQ42 & 43: V1 & V2 ±3%, V3 & V4 ±5% of nominal, all other models: V1 ±1%, V2, V3 & V4 ±5% of nominal
Transient Response	• 4% max deviation, recovery to within 1% in 500 µs for a 25% load change at 1 A/µs
Ripple & Noise	• 50 mV (Vo=<5 V), 120mV (Vo=12, 15 V), 200 mV (Vo=24, 48 V). Measured pk-pk with a 20 MHz bandwidth
Overvoltage Protection	• 115-140% - V1 only. Cycle mains to reset
Overtemperature Protection	• Fitted with auto restart
Overload Protection	• 110-125% - Primary side power limiting with auto recovery. Constant current limit for single output models and foldback current limit for multi output models. V3 & V4 PTC resetting fuses
Temperature Coefficient	• 0.02%/°C

General

Efficiency	• 80-90% depending on model
Isolation	• 4000 VAC Input to Output 1500 VAC Input to Ground 1500 VAC Output to Ground open frame (For BF applications, consult sales office) 500 VAC Output to Ground U channel & covered
Switching Frequency	• PFC 75 kHz typical, PWM 60 kHz typical
Signals	• Power fail - open collector output referenced to 0 V sense
Remote Sense	• See Application Notes
Remote On/Off	• See Application Notes
MTBF	• 385 kHrs typical at +25 °C per MIL-HDBK-217F

Environmental

Operating Temperature	• -10 °C to +50 °C at full power, derate to 50% power at +70 °C
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -20 °C to +85 °C
Operating Altitude	• 3000m
Shock	• 30 g peak, half sine, 6 axes
Vibration	• 2 g rms, 5-500 Hz, 3 axes

EMC & Safety

Emissions	• EN55011/22 class B conducted, class A radiated
Harmonic Currents	• EN61000-3-2 for class A equipment
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, Level 3 Perf Criteria A
Radiated Immunity	• EN61000-4-3, 10 V rms 80% mod, Perf Criteria A
EFT/Burst	• EN61000-4-4, Level 3 Perf Criteria A
Surge	• EN61000-4-5, Level 3 Perf Criteria A
Conducted Immunity	• EN61000-4-6, Level 3 Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms, Perf Criteria A, B, B
Safety Approvals	• EN60601-1-1, EN60950-1:2001, UL/cUL60950:2003, CSA60601.1, UL60601-1:2003.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Models and Ratings

Total Power			Output 1				Output 2[6]				Output 3[6,8]			Output 4[6,8]			Model Number
Max[7]	Peak	Conv.[4,5]	V	Min	Max	Peak[1]	V	Min	Max	Peak[1]	V	Min	Max	V	Min	Max	
175 W	204 W	120 W	12.0 V	0.0 A	14.5 A	17.0 A											RCL175PS12
175 W	195 W	120 W	15.0 V	0.0 A	11.6 A	13.0 A											RCL175PS15
175 W	200 W	120 W	24.0 V	0.0 A	7.2 A	8.3 A											RCL175PS24
175 W	200 W	120 W	28.0 V	0.0 A	6.2 A	7.1 A											RCL175PS28
175 W	202 W	120 W	48.0 V	0.0 A	3.6 A	4.2 A											RCL175PS48
175 W	200 W	110 W	5.0 V	1.5 A	15.0 A	-	12.0 V	0.1 A	8.3 A	10.4 A							RCL175PD22[4,6]
175 W	200 W	110 W	5.0 V	1.5 A	15.0 A	-	12.0 V	0.1 A	6.3 A	8.4 A	F 12 V	0.1 A	2.0 A				RCL175PT31[4,6]
175 W	200 W	110 W	5.0 V	1.5 A	15.0 A	-	15.0 V	0.1 A	4.6 A	6.6 A	F 15 V	0.1 A	2.0 A				RCL175PT32[4,6]
175 W	200 W	90 W	5.0 V	1.5 A	15.0 A	-	3.3 V	0.1 A	15.0 A	-	F 15 V	0.1 A	2.0 A	F 15 V	0.1 A	2.0 A	RCL175PQ43[5,6]
175 W	200 W	90 W	5.0 V	1.5 A	15.0 A	-	12.0 V	0.1 A	5.5 A	7.6 A	F 5 V	0.1 A	2.0 A	F 12 V	0.1 A	2.0 A	RCL175PQ44[6]
175 W	200 W	90 W	5.0 V	1.5 A	15.0 A	-	15.0 V	0.1 A	4.0 A	6.0 A	F 5 V	0.1 A	2.0 A	F 15 V	0.1 A	2.0 A	RCL175PQ45[4,6]
175 W	200 W	90 W	5.0 V	1.5 A	15.0 A	-	24.0 V	0.1 A	3.2 A	5.0 A	F 12 V	0.1 A	2.0 A	F 12 V	0.1 A	2.0 A	RCL175PQ46[4,6]
175 W	200 W	90 W	5.0 V	1.5 A	15.0 A	-	24.0 V	0.1 A	3.0 A	5.0 A	F 15 V	0.1 A	2.0 A	F 15 V	0.1 A	2.0 A	RCL175PQ47[4,6]

Notes

1. *Peak rating can be taken for 5 seconds in every minute. Average power not to exceed maximum power.*
2. *There is a user-accessible fan supply rated at 12 V at 350 mA (not available on fan-cooled units).*
3. *For operation at 85 VAC output power is derated to 95%.*
4. *Output 1 10 A max convection-cooled.*
5. *20 A max from output 1 and 2 combined convection-cooled.*
6. *A minimum load of 100 mA is required on output 2, 3 and 4 to maintain the regulation figures.*
7. *12 CFM airflow required for maximum power.*
8. *Outputs 3 & 4 are floating, they can be connected externally for positive or negative output.*
9. *Connector kits and cable harnesses available. Consult sales for options.*

Pin Connectors

INPUT CONNECTOR - P1	
Pin	Function
1	Live
2	N/C
3	Neutral

P1 is a 3-way 0.156" pitch square pin header
Molex housing 09-91-0300 pins 08-50-0106
(24-18 AWG) 08-50-0108 (28-22 AWG)

OUTPUT CONNECTOR - P2	
Pin	Function
1	+Output 1
2	+Output 1
3	+Output 1
4	0 V
5	0 V
6	0 V
7	0 V
8	0 V
9	0 V
10	+Output 2
11	+Output 2
12	+Output 2
13	-Output 3
14	+Output 3
15	-Output 4
16	+Output 4

SIGNALS CONNECTOR - P3	
Pin	Function
1	Remote On/Off
2	+Sense
3	-Sense
4	PF signal
5	0 V fan supply
6	+12 V fan supply

P3 is a 6-way 0.1" pitch square pin header
Molex housing 22-01-2065 pins 08-50-0032

Application Notes

Remote Sense - V1 only, compensates for 0.5 V or 10% whichever is lower.

Power Fail - Open collector output refers to 0 V sense (when using the power fail signal, -Sense must be connected to 0 V).

Remote On/Off - Connect pin 1 (P3) to 0 V to disable unit (optional remote enable specify suffix '-E' with the model number). Applying a logic '0' will also disable the unit.

Options

- For the U-channel version, add suffix '-U' to the model number.
- For the U-channel version with cover kit, add suffix '-C' to the model number.
- For the U-channel version with fan cover kit, add suffix '-F' to the model number.
- For screw terminals (output connector P2 only), add suffix '-S' to the model number.
- For versions with remote enable, contact sales.
- For foldback current limit on single output models, contact sales.
- For constant current limit (output 1 & 2) on multi-output models, contact sales.

Connector Info

For all formats, output connector P2 as follows:

Single Output Models:
6-way 0.156" pitch square pin header
Molex housing 09-91-0600
Pins 08-50-0106 (24-18 AWG) 08-50-0108 (28-22 AWG)

Dual Output Models:
12-way 0.156" pitch square pin header
Molex housing 09-91-1200
Pins 08-50-0106 (24-18 AWG) 08-50-0108 (28-22 AWG)

Triple Output Models:
14-way 0.156" pitch square pin header
Molex housing 09-91-1400
Pins 08-50-0106 (24-18 AWG) 08-50-0108 (28-22 AWG)

Quad Output Models:
16-way 0.156" pitch square pin header
Molex housing 09-91-1600
Pins 08-50-0106 (24-18 AWG) 08-50-0108 (28-22 AWG)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Mechanical Details

All dimensions are in inches (mm)
Tolerance ±0.02 (±0.5)

Open Frame


Weight: 1.10 lbs (500 g) approx.

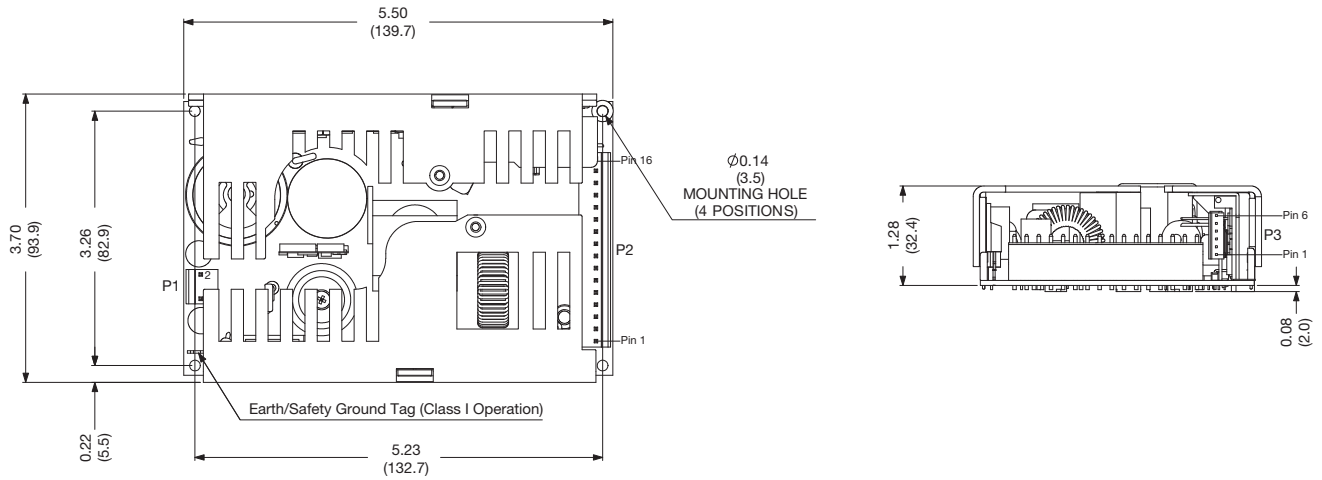

Note:
1. Suitable for class I and class II operation, for class II applications contact sales.
2. Overall height: 1.36 (34.6).

U-channel

Weight: 1.54 lbs (700 g) approx.

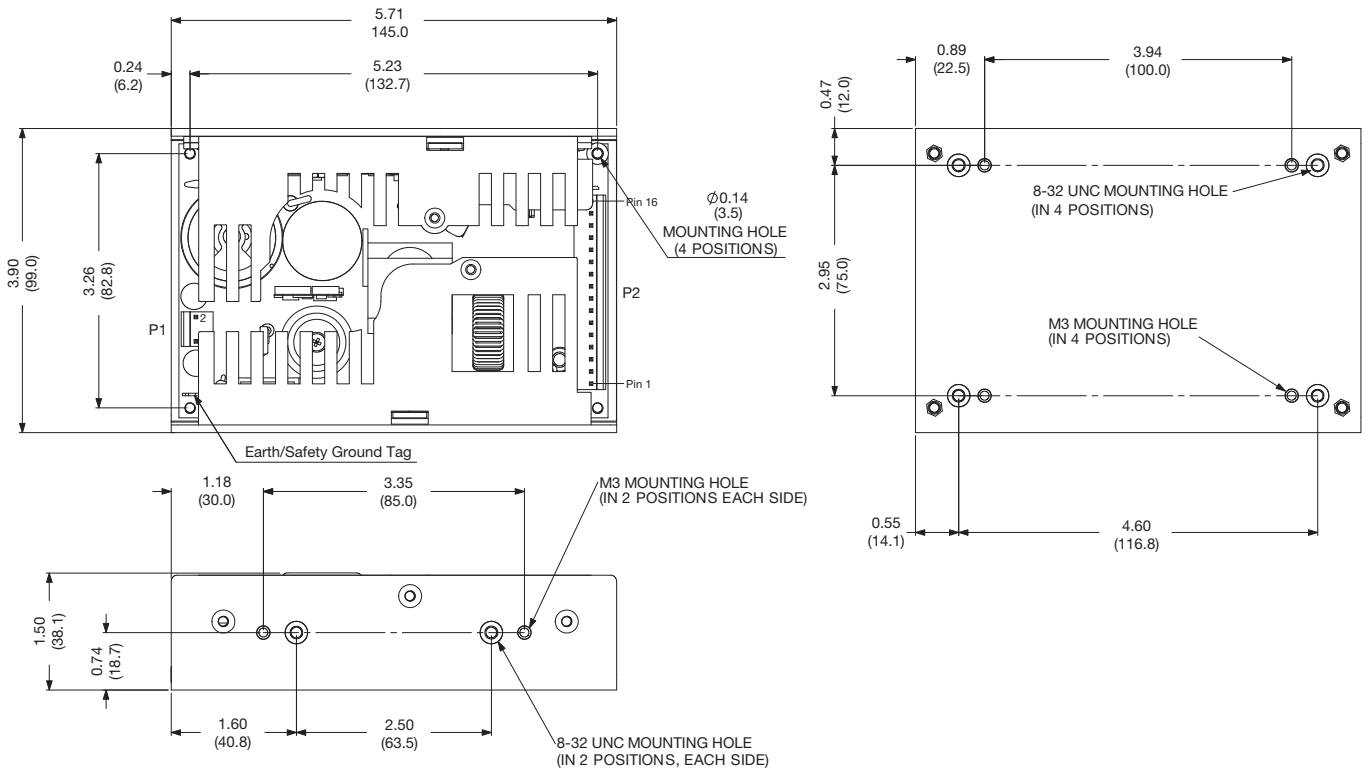

Note:
1. Suitable for class I operation only.
2. Mounting screws must not penetrate by more than 0.12” (3.0 mm) max


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Mechanical Details

All dimensions are in inches (mm)

U-channel & Cover


Weight: 1.76 lbs (800 g) approx.

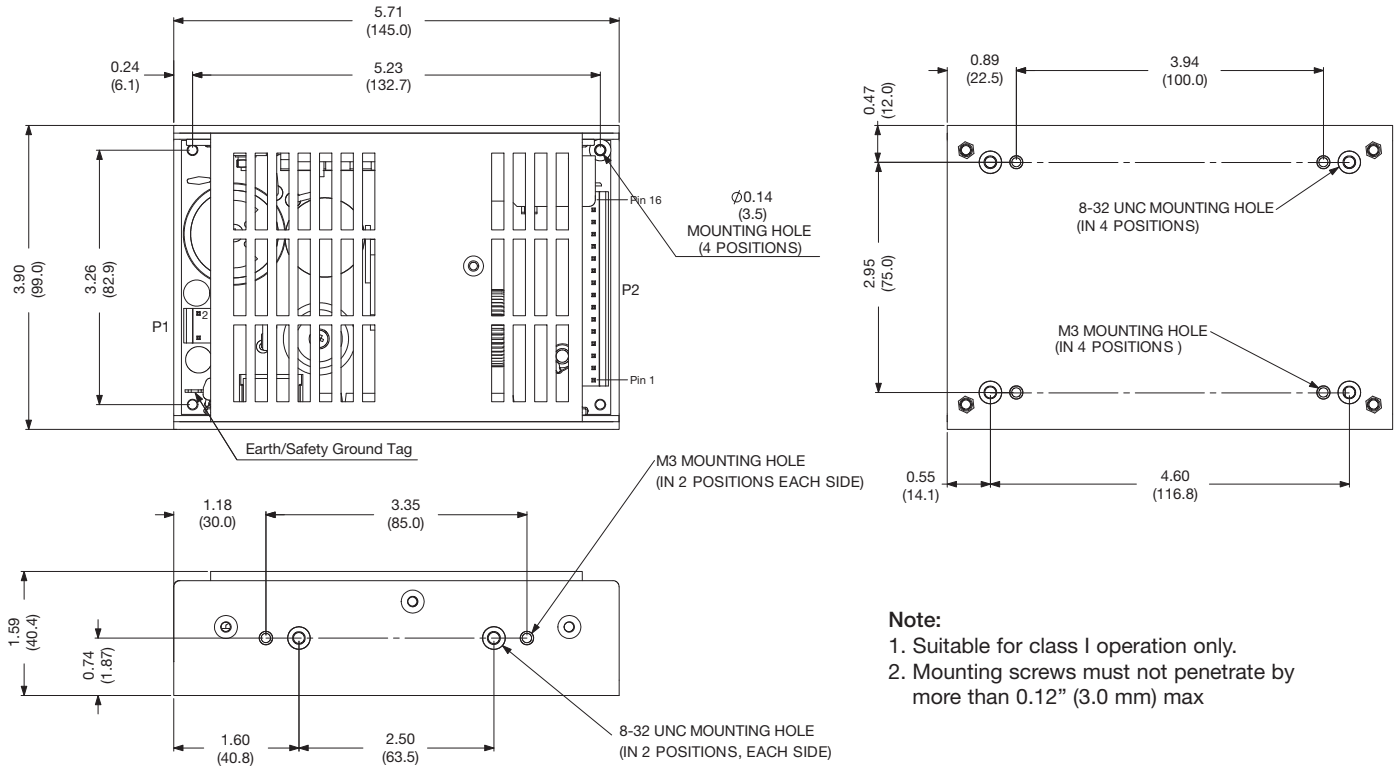

Note:
1. Suitable for class I operation only.
2. Mounting screws must not penetrate by more than 0.12” (3.0 mm) max

U-channel & Fan Cover

Weight: 1.98 lbs (900 g) approx.

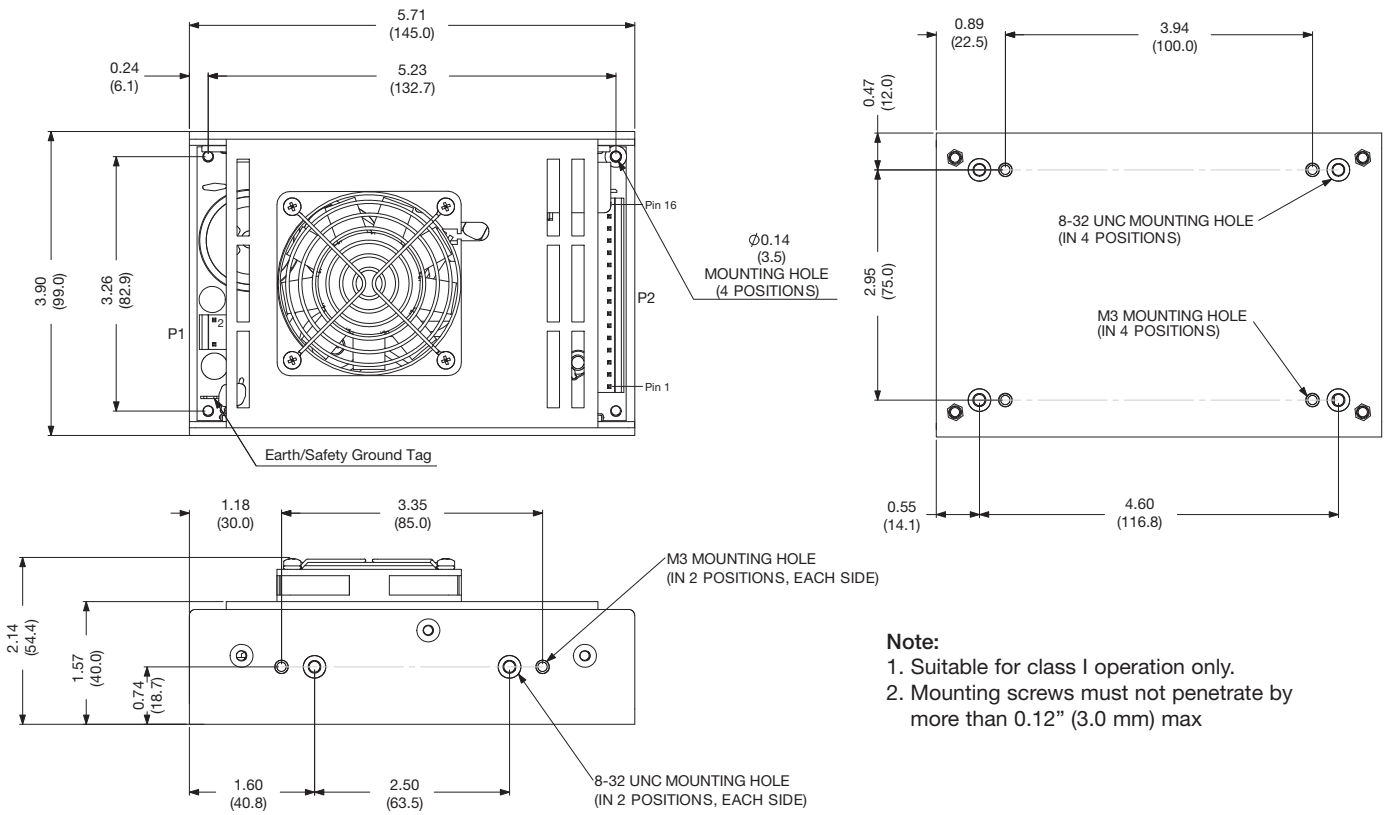

Note:
1. Suitable for class I operation only.
2. Mounting screws must not penetrate by more than 0.12” (3.0 mm) max

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP