



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT


Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

XVME-531 16-Channel Analog Output Modules

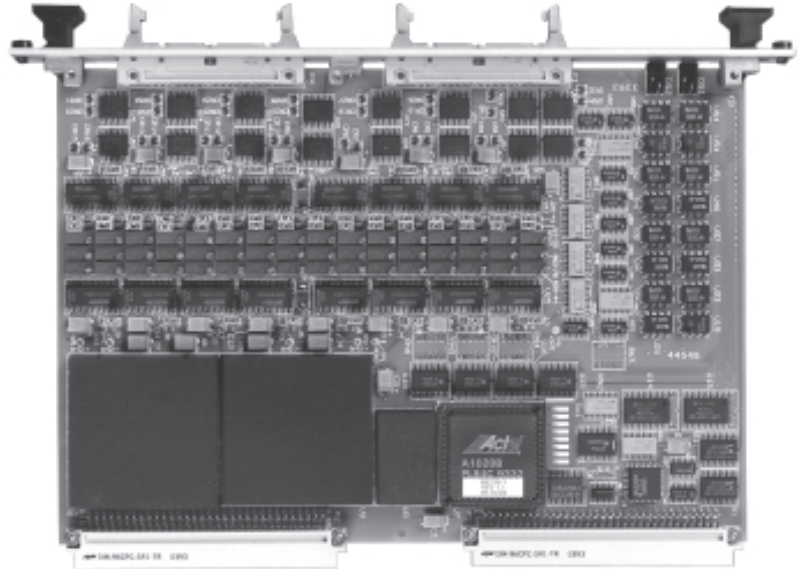

Features

- 16 independent Digital/Analog output channels
- 12-bit resolution
- Voltage ranges of 0-10 V, ± 5 V or ± 10 V
- Current output from 4 to 20mA
- 500 volt optical isolation
- Transparent or multichannel update mode
- Gain and offset adjustable on each channel
- Overall error limited to ± 0.5 LSB output voltage, ± 0.66 LSB output current

Applications

- Process control
- Machine control
- Display meters
- Strip chart recorders
- Proportional valves
- Variable speed motor controllers
- Temperature controllers
- Set point controllers
- Meters

Overview

The XVME-531 Analog Output Module is a powerful, double-high, VMEbus-compatible 12-bit Digital/Analog I/O module. This module provides your VME system with the capability of outputting voltage or current over any of 16 independent analog output channels. Each channel can be separately configured for a variety of voltage or current output operations. The XVME-531 supports simultaneous multichannel output and provides isolation to 500 volts.

The XVME-531 provides adjustable offset and gain, and are accurate to a maximum overall error of 0.5 LSB for voltage and ± 0.66 LSB for current. The XVME-531 module conforms to the XycomVME standard I/O architecture.

Hardware Specifications

Number of Channels	16
Optical Isolation 531	500 V

Voltage Output Characteristics

Resolution	12 bits
Accuracy	
Overall Error	±.5 LSB
Monotonicity	Guaranteed
Settling Time (to .012%)	
0-10V, ± 5V	5 µsec.
± 10V	6 µsec.
Offset T.C.	10 PPM/C max
Gain T.C.	20 PPM/C max

Current Output Characteristics

Resolution	12 bits
Compliance Voltage	10.5 volts @20mA
Accuracy	
Overall Error	± .66 LSB, ± .016%
Settling Time (to 1/2 LSB)	80 µsec.
Load Resistance Range	50 to 525Ω
Offset T.C.	30 ppm/C max
Gain T.C.	50 ppm/C max

Conversion Time

XVME-531 4.7 µsec., typ.
(Conversion Time is defined as the time required to start a conversion. It is measured from the start of DS0* or DS1* to when the analog output first begins to change.)

Power Requirements

XVME-531	5 V ± 5%, 1.8 A typ., with outputs at full scale (voltage mode)
	3.2 A typ., with outputs at full scale (current mode)

Reset

All DACs are reset to 0000H or 0800H jumper configuration at power-up or system reset or software reset.

XycomVME, Inc.
710 N. Maple Rd.
Saline, MI 48176
Ph. 734.944.1942
Fax. 734.944.1999

Web site: www.xycomvme.com

Environmental Specifications

Temperature

Operating	0° to 65° C (32° to 149° F)
Non-operating	-40° to 85° C (-40° to 185° F)

Humidity

20 to 95% RH, non-condensing

Altitude

Operating	Sea level to 10,000 ft. (3048m)
Non-operating	Sea level to 40,000 ft. (12192m)

Vibration

Operating	5 to 2,000 Hz .015" (.38 mm) peak-to-peak displacement 2.5 g (maximum) acceleration,
Non-operating	5 to 2,000 Hz .030" (.76 mm) peak-to-peak displacement 5.0 g (maximum) acceleration,

Shock

Operating	30 g peak acceleration 11 msec duration
Non-operating	50 g peak acceleration 11 msec duration

VMEbus Compliance

- Complies with VMEbus Specification, IEEE 1014
- A24/A16:D16/D08(E0) DTB Slave
- Utility signals- SYSFAIL

Warranty Information

The XVME-531 carries a two-year warranty.

Ordering Information

XVME-531/2 : 16-Channel Analog Output Module
Configurable as (Voltage or 4-20mA)

XycomVME, Inc. a company of the



©2005 XycomVME, Inc. All rights reserved. Printed in USA.
All brand or product names are the property of their respective owners.
Specifications may change without notice.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com