



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# XVME-656

## VMEbus Pentium® Processor Module

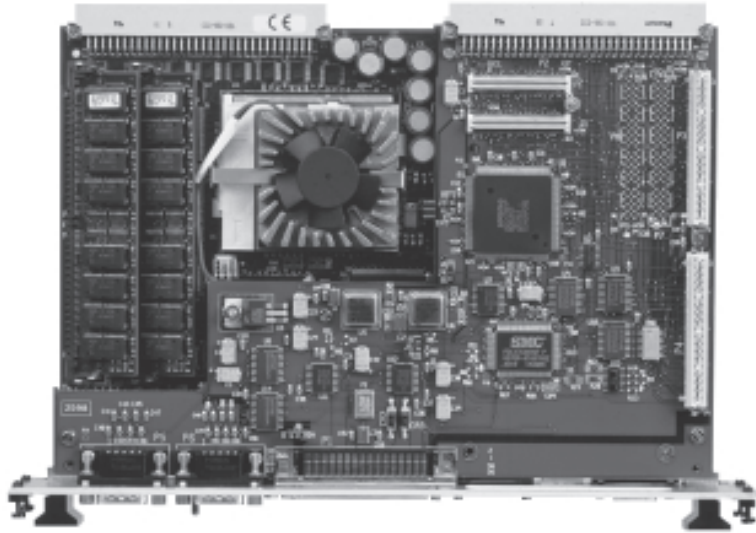

### Features

- 233 MHz Pentium® processor with MMX™ technology
- Supports up to 256 MB of fast-page or EDO DRAM in 72-pin SIMM sites, with ECC or parity
- 512K of synchronous Level 2 pipeline cache
- High-performance PCI local bus SVGA controller with 2 MB of VRAM
- PCI Enhanced IDE controller with DMA
- Secondary IDE controller
- 10/100 Mbit PCI Ethernet controller with front RJ-45 connector
- Up to 72 MB of optional flash disk storage
- PCI-to-VMEbus interface with DMA
- UltraSCSI PCI host adapter
- PCI Mezzanine Card (PMC) expansion site
- Four high-speed 16550-compatible serial ports
- Two Universal Serial Bus (USB) ports
- EPP or ECP parallel port
- PS/2-style keyboard and mouse ports
- Configurable hardware byte-swapping logic

### Overview

The XVME-656 is a powerful VMEbus PC compatible processor module from Xycom Automation, the pioneer and leader in VMEbus PC technology. This powerful two-slot VMEbus processor integrates a 233 MHz MMX Pentium CPU with a PCI-to-VMEbus interface and allows users to take advantage of the powerful multiprocessing capability of the VMEbus while utilizing standard off-the-shelf PC software and operating systems.

At the core of the XVME-656 module is the Intel 233MHz MMX CPU combined with 512K of synchronous Level 2 pipeline cache and up to 256 MB of fast-page or EDO DRAM.

The XVME-656 module contains a wide breadth of I/O including PCI Graphics, EIDE, Ultra SCSI and Ethernet controllers, two Universal Serial Bus (USB) Ports, four high-speed serial ports, one EPP/ECP parallel port, and PS/2 style keyboard and mouse ports. The module also has one onboard PCI Mezzanine Card (PMC) site, and additional I/O expansion is available using Xycom Automation's modular I/O carrier modules (XVME-976), which provide a mechanism to expand your system using additional PMC or PC/104 modules.

The XVME-656 module is an unbeatable solution for power and I/O for VMEbus systems.

The XVME-656 features a high-performance, highly integrated Intel chipset that incorporates a host-to-PCI bus interface and PCI-to-ISA bridge with Universal Serial Bus host controller.

### ***Display Support***

Graphics support is provided by a highly integrated SVGA controller with an internal 2 MB 83 MHz frame buffer. Resolutions of up to 1280 × 1024 with 256 colors are supported. The device uses a 64-bit internal graphics engine with hardware BitBLT to enhance Windows GUI performance. SVGA output is available at the module front panel in standard 15-pin D shell connector.

### ***Network Support***

The XVME-656 contains a state-of-the-art Intel 82558 10/100 Mbit Ethernet controller with a 32-bit PCI bus mastering interface to support bus transfers of 100 Mbits per second. The RJ-45 connector on the module's front panel provides autosensing for 10 BaseT and 100 BaseTX connections.

### ***VMEbus Interface***

The PCI-to-VMEbus bridge device provides users with a flexible mapping architecture to allow configurations that will support virtually all user applications. The bridge supports multiple VME master and slave images with BLT and DMA capability for high-performance block data operations.

The XVME-656 also contains onboard hardware byte-swapping.

### ***Expansion***

Two expansion modules are available for use with the XVME-656. The XVME-976/1 allows for one additional PMC module and one PC/104 module and the XVME-976/104 provides for two PC/104 modules.

### ***Ultra SCSI Support***

SCSI support is enabled by an UltraSCSI host adapter with a 32-bit bus mastering PCI interface. This highly integrated UltraSCSI controller contains a SCSI phase engine which provides auto-execution of SCSI commands freeing up the host CPU to perform other tasks.

### ***Mass Storage***

Floppy and hard drive functions are supported by bus mastering EIDE and PC-compatible controllers. Signals for both the floppy and EIDE interfaces are routed to the A and C rows of the module's P2 connector, allowing the XVME-656 to access a variety of mass-storage options. These options include single-slot hard and floppy disk modules (XVME-977), or other externally mounted mass storage devices using the XVME-973 drive adaptor module.

### ***Nonvolatile Storage***

An onboard 32-pin socket provides nonvolatile storage with zero-power SRAM or an M-Systems DiskOnChip® flash disk. The DiskOnChip® flash disk (XVME-992) will provide up to 72 MB of solid-state disk storage for embedded applications.

### ***I/O Support***


The PCI to ISA bridge device contains a high speed bus mastering EIDE controller and two Universal Serial bus (USB) channels with connections on the module's front panel for connecting the next generation of PC-compatible peripheral devices.

Other functions provided on the XVME-656 include four 16550-compatible RS-232C serial ports, one ECP/EPP parallel port, and PS/2-style keyboard and mouse ports. All connections to these ports are available on the front panel.

### ***Software Support***

Although the XVME-656 is fully PC-compatible and will run "off-the-shelf" PC software, most packages will not be able to access the features of the VMEbus. To solve this problem, Xycom Automation has developed extensive Board Support Packages (BSPs) that simplify the integration of VMEbus data into PC software applications. Xycom Automation's BSPs provide users with an efficient high-level interface between their applications and the VMEbus-to-PCI bridge device. Board Support Packages are available for MS-DOS®, Windows NT®, QNX®, Lynx, Solaris™, and VxWorks®.

# XVME-656 Block Diagram

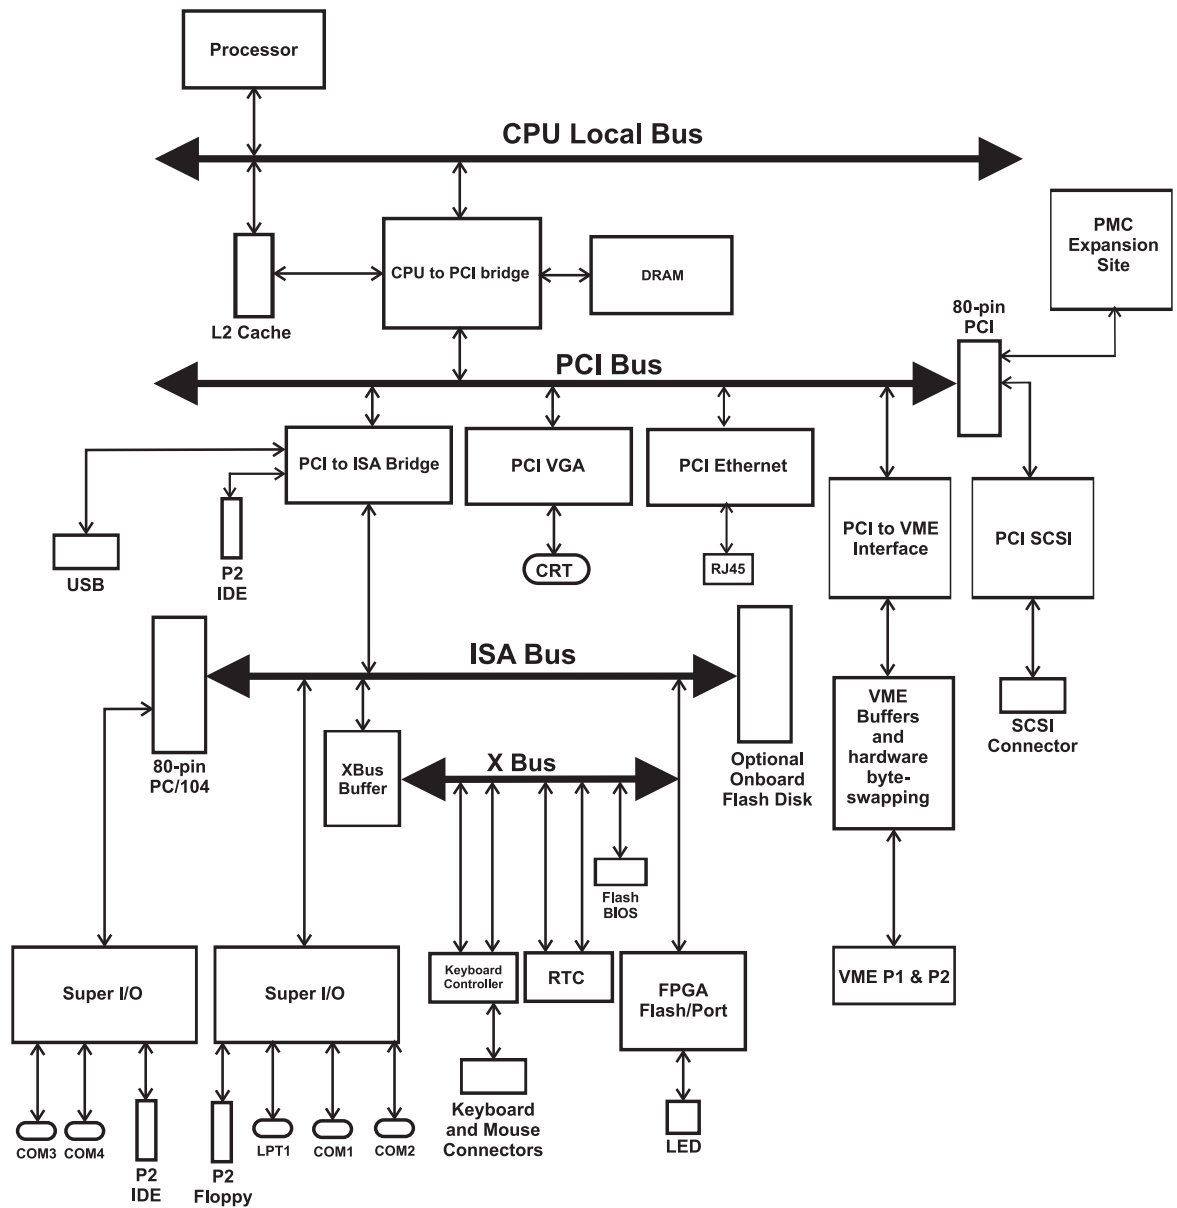

## Hardware Specifications

### CPU

233 MHz Pentium Processor with MMX technology

### PCI Super VGA Graphics Controller

1280 × 1024; 256 colors  
2 MB VRAM

### PCI Ethernet Controller

Intel 82558 Controller  
10/100 Mbps Fast Ethernet  
RJ-45 Connector on module front panel

### Serial Ports

Four RS-232C-compatible  
Two Universal Serial Bus ports

### PCI Ultra SCSI Controller

32-bit bus mastering PCI interface

### Parallel Interface

One EPP/ECP-compatible

### Onboard Memory

Fast-page or EDO DRAM, 32 MB to 256 MB

### Cache

512K pipeline burst cache standard

### Power Specifications<sup>a</sup>

11.82 amps (max.), 5.87 amps (typical)

<sup>a</sup>Requires VME P2 Backplane

## Environmental Specifications

### Temperature

Operating	0-50° C with 100 CFM airflow
Nonoperating	-40 to 85° C

### Vibration

Frequency	5 to 2000 Hz
Operating	.015" (.38 mm) peak-to-peak displacement 2.5 g (maximum) acceleration
Nonoperating	.030" (.76 mm) peak-to-peak displacement 5.0 g (maximum) acceleration

### Shock

Operating	30 g peak acceleration 11 msec duration
Nonoperating	50 g peak acceleration 11 msec duration

### Humidity

Operating	20% to 80% RH, noncondensing
Nonoperating	20% to 80% RH, noncondensing

## Warranty

The XVME-656 carries a two-year parts and labor warranty.

## VMEbus Compliance

- Complies with VMEbus Specification, ANSI/VITA 1-1994
- A32/A24/A16:D64/D32/D16/D08(EO) DTB Master
- A32/A24:D64/D32/D16/D08(EO) DTB Slave
- R(0-3) Bus Requester
- Interrupter I(1)-I(7) DYN
- IH(1)-IH(7) Interrupt Handler
- SYSCLK and SYSRESET Driver
- PRI, SGL, RRS Arbiter
- RWD, ROR bus release
- Form Factor: DOUBLE  
233 mm × 160 mm (9.2" × 6.3")

## Ordering Information

XVME-656/31x 233 MHz MMX Pentium VMEbus PC Processor with 512K cache, configurable hardware byte-swapping

where: x=0	No DRAM
x=3	32 MB DRAM
x=4	64 MB DRAM
x=5	128 MB DRAM
x=6	256 MB DRAM

XVME-973/1	Drive Adapter Module
XVME-976/1	PMC/PC/104 Expansion Module
XVME-976/104	Dual PC/104 Expansion Module
XVME-977	Single-slot Mass Storage Module
XVME-992/8	8 MB DiskOnChip®
XVME-992/24	24 MB DiskOnChip®
XVME-992/40	40 MB DiskOnChip®
XVME-992/72	72 MB DiskOnChip®

### **XYCOM, INC.**

750 North Maple Road  
Saline, Michigan 48176-1292  
Phone: (734) 429-4971  
FAX: (734) 429-1010  
Call toll-free: 1-800-AT-XYCOM  
<http://www.xycom.com/>

### **XYCOM AUTOMATION CANADA, INC.**

3490 Laird Road, Suite 11  
Mississauga, Ontario L5L 5Y4 Canada  
Phone: (905) 825-0281  
FAX: (905) 825-0282

### **XYCOM EUROPE LTD. NORTHERN EUROPE**

21 Tenter Road, Moulton Park  
Northampton NN3 6AX England  
Phone: +44-1604-790-767  
FAX: +44-1604-790-722

### **XYCOM AUTOMATION S.r.L. SOUTHERN EUROPE**

Via Chambery 93/107/U  
10142 Torino, Italy  
Phone: 39-011-770-5311  
FAX: 39-011-770-53270



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)