



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗


WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

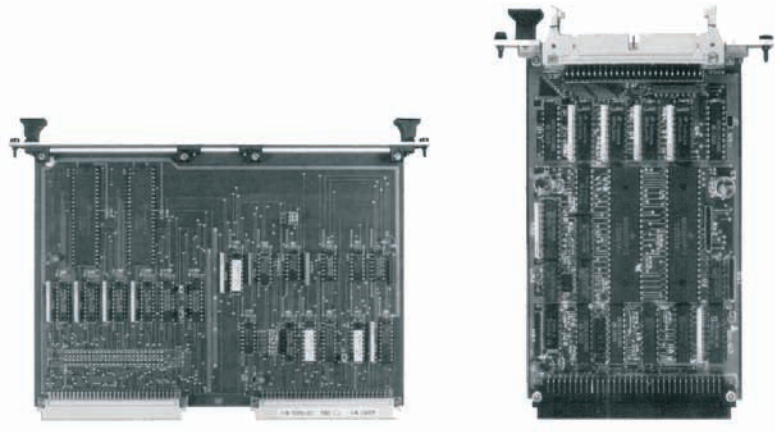

XVME-200/290

Digital I/O

Modules

FEATURES

- Low-cost digital I/O
- 68230 PI/T chips
- Buffered inputs and outputs
- Handshaking
- VMEbus interrupts
- Two 24-bit timers

APPLICATIONS

- Printers
- Thumbwheel switches
- OPTO 22 I/O
- Computer interface

The XVME-200 is a single-high VMEbus-compatible Digital I/O Module. The XVME-200 provides a VMEbus system with 32 channels of TTL-level I/O, as well as two 24-bit timer devices.

The XVME-200 contains two 68230 Parallel Interface/Timer (PI/T) devices with VMEbus interrupt capability. The direction of the I/O signals from the PI/T devices is software-selectable as four independent 8-bit ports. All inputs and outputs from the XVME-200 are buffered. The pinout of the front panel connectors are compatible with OPTO 22-style signal conditioning equipment.

For applications not allowing I/O to be routed out the front panel, the XVME-290 offers a 6U form factor with the same functionality as the XVME-200, but the I/O is routed through the VMEbus P2 connector on the back of the board.



Embedded products you can count on!

PRODUCT SPECIFICATIONS AND RATINGS

Environmental

	Operating	Nonoperating
Thermal	0° to 65° C (32° to 149° F)	-40° to 85° C (-40° to 185° F)
Humidity	20% to 95% RH, noncondensing	20% to 95% RH, noncondensing
Shock^a	30g peak acceleration, 11 msec duration	50g peak acceleration, 11 msec duration
Vibration 5-2000 Hz^a	.015" (.38 mm) peak-to-peak displacement, 2.5g maximum acceleration	.030" (.76 mm) peak-to-peak displacement, 5.0g maximum acceleration
Altitude	Sea level to 10,000 ft.(3048 m)	Sea level to 40,000 ft.(12192 m)

Electrical

Power Supply	+5 V DC @ 1.3A typical, 1.5 A maximum
Channels	32
Parallel Device	68230 (two)
Input Characteristics	<ul style="list-style-type: none">• Vil = 0.8 V max.• Iil = -750 μA max.• Vih = 2.0 V min.• Iih = -325 μA max.
Output Characteristics	<ul style="list-style-type: none">• Vol = 0.4 V max., Ioh = 12 mA• Vol = 0.5 V max., Ioh = 24 mA• Voh = 2.4 V min., Ioh = -3 mA• Voh = 2.0 V min., Ioh = -15 mA
Timer Characteristics	<ul style="list-style-type: none">• Quantity: 2• Resolution: 24 bits

VME Compliance

- Complies with VMEbus Specification IEEE 1014
- A16:D08(0) DTB Slave
- Interrupter - I(1)-I(7)(STAT), RORA
- Interrupter Vector D08(O)(DYN)

Form Factor:

- XVME-200: SINGLE 6.5" \times 3.94" (165.1 mm \times 100.01 mm)
- XVME-290: DOUBLE 9.2" \times 6.3" (233.35 mm \times 160 mm)

ORDERING INFORMATION

Order Number	Description
XVME-200	32-Channel DIO with interrupts
XVME-290	6U version of the XVME-200 with I/O routed to the VMEbus P2 connector
includes	6U front panel kit for the XVME-200

XycomVME, Inc.
710 N. Maple Rd.
Saline, MI 48176
Ph. 734.944.1942
Fax. 734.944.1999

XycomVME, Inc. a company of the



Web site: www.xycomvme.com

©2005 XycomVME, Inc. All rights reserved. Printed in USA.
All brand or product names are the property of their respective owners.
Specifications may change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisanTG.com



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com