



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

XVME-240

Digital Input/Output Module

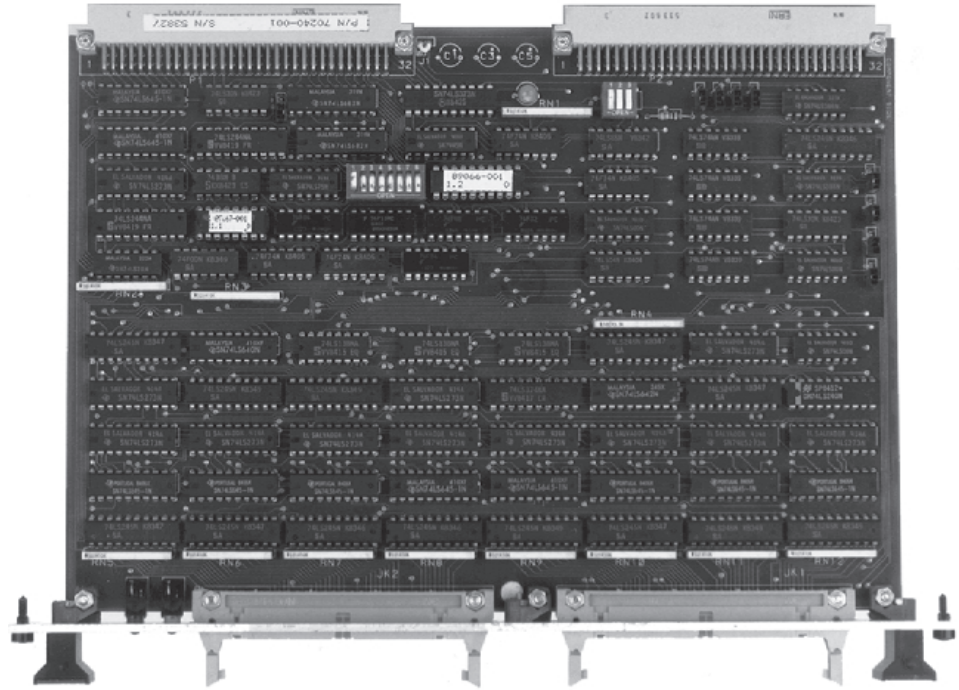

Features

- 64-Channels (8 ports) of bidirectional TTL I/O
- 8- Channels of edge-selectable interrupt inputs with programmable mask
- 8- channels of flag outputs
- High density, low cost-per-channel

Applications

- Printers
- Interface to programmable controllers
- Thumbwheel switches
- Opto 22 I/O
- Computer interface
- Interface to other digital systems and subsystems
- Parallel port devices

Overview

The XVME-240 Digital Input/Output Module is an 80-channel, TTL-level, VMEbus-compatible I/O module. Sixty-four of these channels are arranged to form eight (byte-wide) bidirectional I/O ports. Each port can be separately programmed for either input or output by simply setting or clearing a single corresponding bit in the port direction register.

The XVME-240 provides eight interrupt input lines to allow externally-connected devices to generate VMEbus interrupts on any level. The user has the option to control whether the board will latch the interrupt input signals on the rising or falling edge. Each interrupt line is also maskable via a programmable interrupt mask register. In addition, the XVME-240 has eight flag output lines which can be employed as external interrupt acknowledge lines or as control signal lines to any externally-connected devices.

Hardware Specifications

Input Characteristics— any input

High-level input voltage (V_{ih})	2.0 V min., 5.5 V max.
Low-level input voltage (V_{il})	0.8 V max.
Low-level input current (I_{il})	0.2 mA max.

Output Characteristics

Channel Outputs

Low-level output voltage (V_{ol})	
$I_{ol} = 48\text{mA}$, 0.5 V max.	
$I_{ol} = 16\text{mA}$, 0.4 V max.	
Low-level output current (I_{ol})	48mA max.
High-level output current (I_{oh})	
$V_{oh} = 2.4\text{ V}$, 3mA, max.	
$V_{oh} = 2.0\text{ V}$, 15mA, max.	

Flag Outputs

Low-level output voltage (V_{ol})	
$I_{ol} = 24\text{mA}$, 0.5 V max.	
$I_{ol} = 12\text{mA}$, 0.4 V max.	
Low-level output current (I_{ol})	24mA max.
High-level output current (I_{oh})	
$V_{oh} = 2.4\text{ V}$, 3mA, max.	
$V_{oh} = 2.0\text{ V}$, 15mA, max.	

Power Requirements

All channels- High outputs	+5 V, typ. 2.7A
All channels- Low outputs	+5 V, typ. 3.6A
	+5 V, typ. 2.7A

Warranty Information

The XVME-240 carries a two-year parts and labor warranty.

XycomVME, Inc.
710 N. Maple Rd.
Saline, MI 48176
Ph. 734.944.1942
Fax. 734.944.1999

Web site: www.xycomvme.com

Environmental Specifications

Temperature

Operating	0° to 65°C (32° to 149°F)
Non-operating	-40° to 85°C (-40° to 185°F)

Humidity

Operating	20 to 80% RH, non-condensing
Non-operating	20 to 90% RH, non-condensing

Altitude

Operating	Sea level to 10,000 ft. (3048 m)
Non-operating	Sea level to 40,000 ft (12192 m)

Vibration

Operating	5 to 2000 Hz .015" (0.38 mm) peak-to-peak displacement 1.0 g (max.) acceleration
Non-operating	5 to 2000 Hz .030" (0.76 mm) peak-to-peak displacement 2.5 g (max.) acceleration

Shock

Operating	30 g peak acceleration 11 msec duration
Non-operating	50 g peak acceleration 11 msec duration

VMEbus Compliance

- Complies with VMEbus Specification, IEEE 1014
- A24/A16:D16/D08(E0) DTB Slave
- Interrupter - I(1)-I(7)(STAT), RORA
- Interrupt vector - D08(O)(DYN)
- Utility signals - SYSFAIL
- Form Factor: DOUBLE
233.7 mm × 160.0 mm (9.2" × 6.3")
- Conforms to XycomVME Standard I/O Architecture

Ordering Information

XVME-240 80-Channel Digital TTL I/O Module

XycomVME, Inc. a company of the



©2005 XycomVME, Inc. All rights reserved. Printed in USA.
All brand or product names are the property of their respective owners.
Specifications may change without notice.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com