



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

XVME-540

Analog Input/Output Module

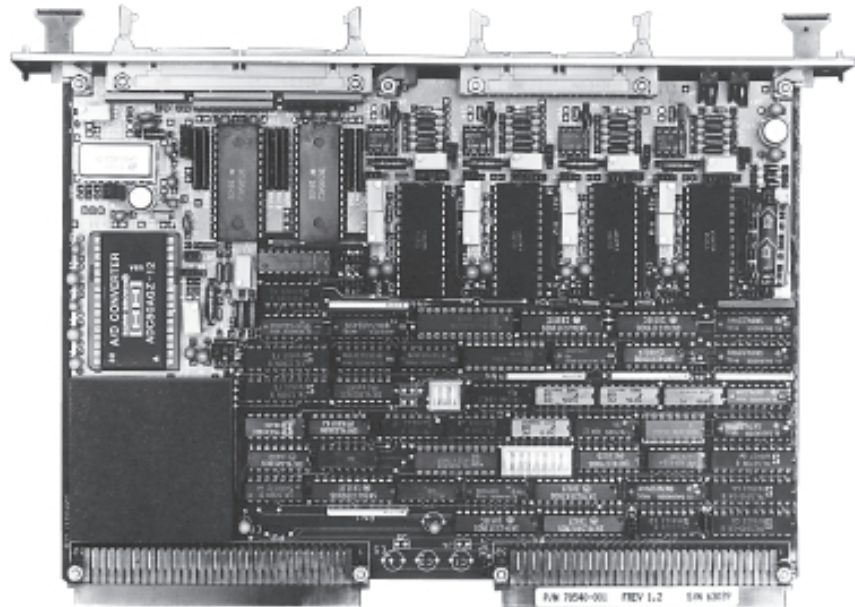

Features

- 32 single-ended or 16 differential input channels
- Inputs are configurable as bipolar or unipolar
- 12-bit conversion
- Three ranges of programmable gain
- Jumper-selectable input/output voltage ranges
- Four input sampling modes
- Four output channels, each selectable for voltage or current output
- Fully compatible with Analog Devices 3B signal conditioning

Applications

- Data acquisition
- Process control
- Pressure and temperature sensing
- Machine control

Overview

The XVME-540 Analog Input/Output Module is a powerful, VMEbus-compatible I/O module that can perform 12-bit A/D and D/A conversions.

The XVME-540 contains 32 single-ended or 16 differential analog input channels. The input channels can be programmed to operate in any one of four operating modes: random channel sampling, sequential channel sampling, single-channel sampling, and sampling based on an external trigger. The XVME-540 has programmable gain available within one of three jumper-selected ranges.

The XVME-540 also contains four analog output channels. These output channels can be configured as either voltage or current outputs.

Hardware Specifications

Analog Outputs

Number of Channels	4
Accuracy	
Resolution	12 bits
Overall error	±1/2 LSB
Differential linearity	±1 LSB

Voltage Output Characteristics

Ranges	0-5 V, 0-10 V, ±5 V, ±10 V
Output current	5 mA min. @ ±10 V
Settling time	50 µsec
Load resistance range	50-500 ohms
Offset T.C.	75 ppm/°C
Gain T.C.	100 ppm/°C

Current Loop Characteristics

Range	4-20 mA, non-isolated
Compliance voltage	10 V @ 20 mA
Loop supply voltage	+15 V to +30 V
Settling time	50 µsec
Load resistance range	50-500 ohms
Offset T.C.	75 ppm/°C
Gain T.C.	100 ppm/°C

Digital Input Coding

BIN, OBN

Analog Inputs

Number of Channels	
Single-ended	32
Differential	16

A/D Input Full Scale Voltage Ranges (G=1)

Unipolar	0-5 V, 0-10 V
Bipolar	±2.5 V, ±5 V & ±10 V

Programmable Gain

Range 1	1,2,5, or 10
Range 2	4, 8, 20, 50, or 100
Range 3	10, 20, 50, or 100

Maximum Input Voltage

Power on	44 V
Power off	30 V

Input Impedance

w/22 MΩ resistor	17 MΩ, min.
w/o 22 MΩ resistor	100 MΩ, min.

Bias Current

±100 nA, max.

Input Capacitance

225 pF, max.

Operating Common Mode Voltage

+13 V/-11 V

Common Mode Rejection Ratio

60 db, min.

External Trigger to Sample

25 µsec

Speed

Conversion Time

Single-channel mode	<25 µsec
All other modes	<50 µsec

Throughput

Single-channel mode	40 KHz
All other modes	20 KHz

Environmental Specifications

Temperature

Operating	0° to 65°C (32° to 149°F)
Nonoperating	-40° to 85°C (-40° to 185°F)

Humidity

20 to 95% RH, non-condensing

Altitude

Operating	Sea level to 10,000 ft. (3048 m)
Nonoperating	Sea level to 40,000 ft. (12192 m)

Vibration

Operating	5 to 2000 Hz .015" (.38 mm) peak-to-peak displacement 2.5 g (maximum) acceleration
Nonoperating	5 to 2000 Hz .030" (.76 mm) peak-to-peak displacement 5.0 g (maximum) acceleration

Shock

Operating	30 g peak acceleration
Nonoperating	50 g peak acceleration 11 msec duration

VMEbus Compliance

Complies with VMEbus Specification, IEEE 1014

A24/A16:D16/D08(E0) DTB Slave

Interrupter - I(1)-I(7)(STAT), RORA

Interrupt Vector - D08(0)(DYN)

Interrupt Signals - SYSFAIL

Form Factor NEXP

Conforms to Xycom Automation Standard I/O Architecture

Warranty

The XVME-540 carries a two-year parts and labor warranty.

Ordering Information

XVME-540: 32 SE/16 DI Channel Analog Input,
4 Channel Analog Output

XYCOM AUTOMATION, INC.

750 North Maple Road
Saline, Michigan 48176-1292
Phone: (734) 429-4971
FAX: (734) 429-1010
Call toll-free: 1-800-AT-XYCOM
<http://www.xycomautomation.com/>

XYCOM CANADA, INC.

461 North Service Road West, Unit B36
Oakville, Ontario L6M 2V5 Canada
Phone: (905) 825-0281
FAX: (905) 825-0282

XYCOM AUTOMATION LTD.

NORTHERN EUROPE
21 Tenter Road, Moulton Park
Northampton NN3 6AX England
Phone: +44-1604-790-767
FAX: +44-1604-790-722

XYCOM AUTOMATION S.r.L.

SOUTHERN EUROPE
Via Chambery 93/107/U
10142 Torino, Italy
Phone: 39-011-770-5311
FAX: 39-011-770-53270



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com