

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Acromag / Xembedded / Xycom XVME-566* at our website: ***Click HERE***

XYCOM VME

Embedded products you can count on!

XVME-566 High-Performance Analog Input Module

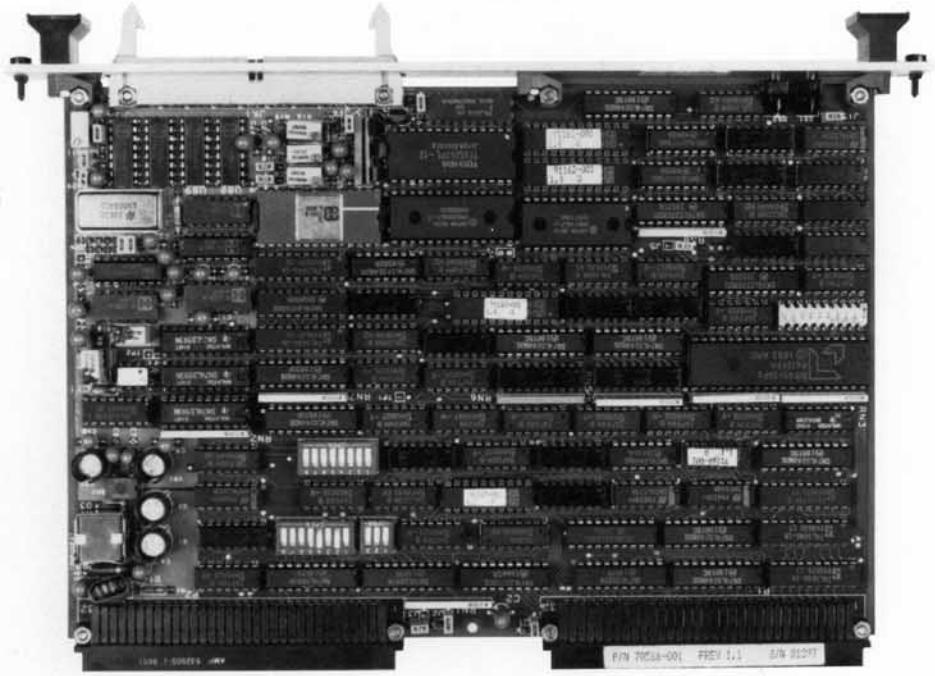

Features

- 100 KHz throughput
- 64 Kbytes dual-access RAM
- Programmable gain
- Programmable conversion sequence
- External trigger and on-board sample clock
- Powerful automatic sampling modes

Applications

- High-speed sampling
- Vibration analysis
- Automatic data collection

Overview

The XVME-566 is a high-performance VMEbus-compatible Analog Input Module. It converts data on 32 single-ended or 16 differential analog input channels and provides 12-bit resolution. Conversions are performed at a rate of 100 KHz, using a dual sample and hold architecture.

At conversion rates of 100 KHz and faster, 100% of the VMEbus bandwidth can be used in servicing the module. The XVME-566 alleviates this problem by providing 64 Kbytes of dual-access RAM, enough for over 32,000 samples. The sequence of channels to be converted can be programmed in a 256 byte sequence RAM. This sequence RAM allows for looping of sample sequences, interrupting the VMEbus when a particular sample is completed, and stopping the sampling process. A gain RAM is also used to provide the gain factor for each individual channel.

A programmable sample clock is provided, which controls the basic sampling rate up to 100 KHz. A sequence of samples can be initiated by either a second on-board trigger clock and external trigger or an S/W trigger.

© *Xycom* VME

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Hardware Specifications

Analog Inputs

Number of Channels	
Single-ended	32
Differential	16
ADC input ranges	0-10, ±5, ±10
Programmable Gain	
Range 1	1, 2, 5, or 10
Range 2	4, 8, 20, or 40
Range 3	10, 20, 50, or 100
Maximum Input Voltage	
Power on	35 V
Power off	20 V
Common Mode Voltage	14 V
Common Mode Rejection Ratio	60 db, min.
Accuracy	
Resolution	12 or 8 bits
Linearity	± 1/2 LSB
Differential linearity	± 1/2 LSB
Monotonicity	Guaranteed
System accuracy	
Gain = 1	0.05% FSR
Gain = 100	0.1% FSR
System accuracy temp. drift	
Gain = 1	40 ppm/°C, max.
Gain = 100	110 ppm/°C, max.
Speed	
Conversion time	<10 usec.
Throughput	100 KHz, 12-bit mode
	142 KHz, 8-bit mode
Trigger clock	up to 100 KHz
Sample clock	up to 142 KHz
Power requirements	5 V

Environmental Specifications

Temperature	
Operating	0° to 65° C (32° to 149° F)
Non-operating	-40° to 85° C (-40° to 185° F)
Humidity	5 to 95% RH, non-condensing
Altitude	
Operating	Sea level to 10,000 ft. (3048 m)
Non-operating	Sea level to 50,000 ft. (15240 m)
Vibration	5 to 2000 Hz
Operating	.015" peak-to-peak displacement
	2.5 g (maximum) acceleration
Non-operating	.030" peak-to-peak displacement
	5.0 g (maximum) acceleration
Shock	
Operating	30 g peak acceleration,
	11 msec duration
Non-operating	50 g peak acceleration,
	11 msec duration

VMEbus Compliance

Complies with VMEbus Specification, IEEE 1014
A16/A24:D16/D08(EO) DTB Slave
Interrupter - I(1)-I(7)(STAT), RORA
Interrupt Vector - D08(O)(DYN)
Utility Signals - SYSFAIL
Form Factor - NEXP (233.35 mm x 160 mm)
Conforms to Xycom Standard I/O Architecture

Warranty Information

The XVME-566 carries a two-year warranty.

Ordering Information

XVME-566: High-performance Analog Input Module

XycomVME, Inc. a company of the 3Sixty group

XycomVME, Inc.
710 N. Maple Rd.
Saline, MI 48176
Ph. 734.944.1942
Fax. 734.944.1999

Web site: www.xycomvme.com

©2005 XycomVME, Inc. All rights reserved. Printed in USA.
All brand or product names are the property of their respective owners.
Specifications may change without notice.

Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP