

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

ZMI 7702 Laser Head

P/N's	Power	Beam Diameter	Mount
8070-0102-31	>400 µW	6 mm	Narrow
8070-0102-32		3 mm	
8070-0102-33	>400 µW	6 mm	Wide
8070-0102-34		3 mm	
8070-0102-35	>525 µW	6 mm	Narrow
8070-0102-36		3 mm	

Physical Characteristics	
Dimensions	See Figure
Weight	5.5 kg
Materials	Casting- Aluminum Narrow Feet- Ultem 2400
Nominal Cable Clearance	135 mm


Electrical	
Power Requirements (max)	+15 VDC ± 0.5 V @ 2.1 A -15 VDC ± 0.5 V @ 1.2 A
Power Dissipation (max)	39 W during operation 50 W during warm-up

Laser Characteristics	
Type	Helium-Neon, CW, heterodyne, linearly polarized
Output Power	See P/N section
Beam Diameter	See P/N section

Laser Characteristics continued	
Beam Pointing Stability	<0.5 arc/°C
Time from turn-on to laser light	<10 sec typical, 70 sec maximum
Time to wavelength stability	<10 minutes, typical
Frequency Difference	20 MHz ± 1600 Hz
Nominal Vacuum Wavelength	F1: 632.991501 nm (vertical polarization) F2: 632.991528 nm (horizontal polarization)
Vacuum Wavelength Lifetime Accuracy	±0.1 ppm
Vacuum Wavelength Stability	0.005 ppm/1 hr 0.01 ppm/24 hrs
DHHS Laser Safety Classification	Class II, conforms to NCDRH regulations

Environmental	
Operating Temperature	10 to 30°C
Non-operating Temperature	-40 to 75°C
Operating Humidity	0 to 90%, noncondensing
Non-operating Humidity	0 to 90%, noncondensing
Shock (non-operational)	11 msec 40g shock on each of three orthogonal axes

Configurations 31/32/35/36

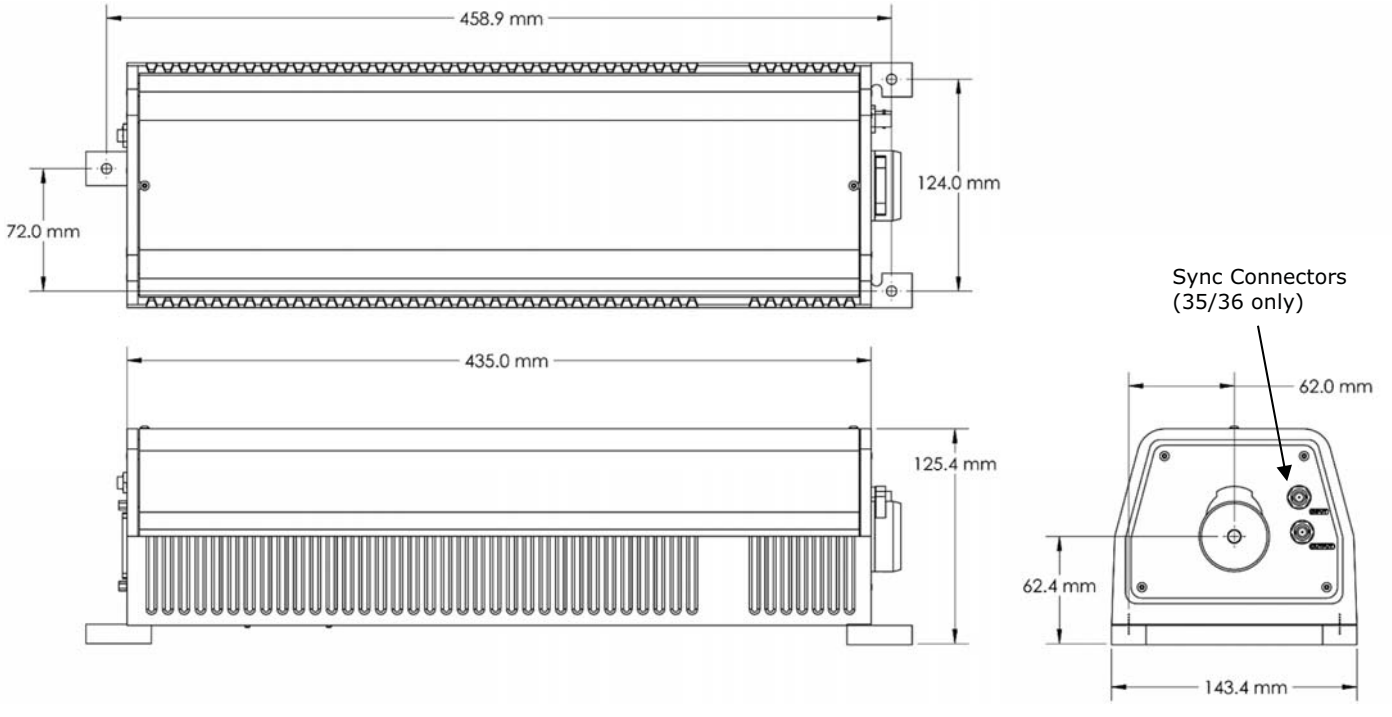



Distribution in the UK & Ireland

Lambda Photometrics Limited
Lambda House Batford Mill
Harpenden Herts AL5 5BZ
United Kingdom
E: info@lambdaphoto.co.uk
W: www.lambdaphoto.co.uk
T: +44 (0)1582 764334
F: +44 (0)1582 712084


Characterisation, Measurement & Analysis

SS-0079 02/20
© 2020 Zygo Corporation

ULTRA PRECISION TECHNOLOGIES

ZMI 7702 Laser Head

Configurations 33/34

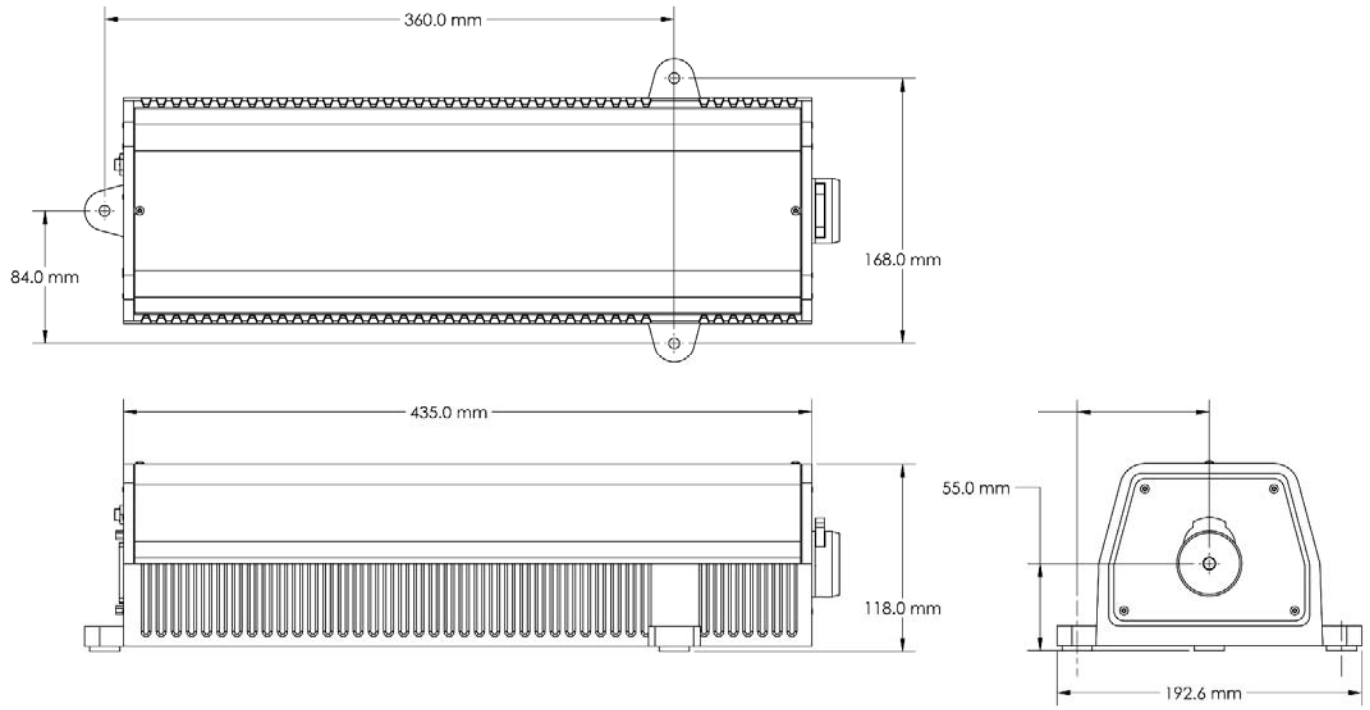

Zygo Corporation
Laurel Brook Road
Middlefield, CT 06455

Phone: 860-347-8506
Email: inquire@zygo.com
Website: www.zygo.com

SS-0079 02/20
© 2020 Zygo Corporation

AMETEK® ULTRA PRECISION TECHNOLOGIES

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP