



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT


Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

TIP850 16 Channel 12 bit A/D, 4 Channel 12 bit D/A

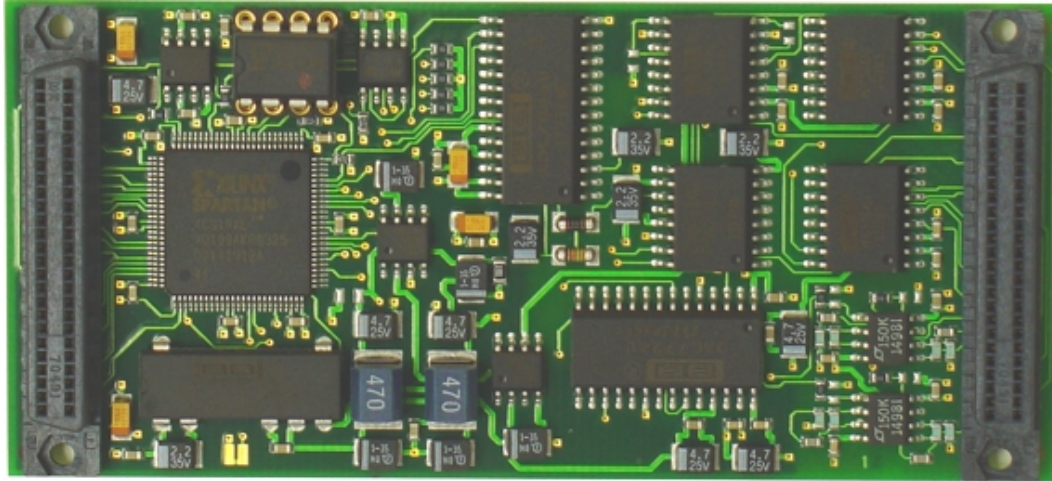

Application Information

The TIP850 is an IndustryPack® compatible module and offers 16 single-ended or 8 differential channels of 12 bit A/D conversion together with 4 channels of 12 bit D/A conversion.


The input multiplexer of the A/D circuit offers analog overvoltage protection of up to 70Vpp. A programmable gain amplifier allows gains of 1, 10, 100 or 1, 2, 4, 8. The full-scale input range is +/-10V. The data acquisition and conversion time is up to 10µs without channel / gain change and up to 62µs with channel / gain change.

The four D/A channels provide simultaneous loading and output voltages of +/-10V. Default value after reset is 0V for all D/A channels. The settling time to 0.01% is 10µs maximum. Each TIP850 is factory calibrated. The calibration information for A/D and D/A circuits are stored in the Identification PROM unique to each IP.

Software Support (TIP850-SW-xx) is available for different operating systems.

Technical Information

- Interface according to IndustryPack specification
- Identification-PROM supports auto-configuration
- Single Size IndustryPack
- 16 single-ended or 8 differential channels of 12 bit A/D conversion
- ESD protected input multiplexer
- Programmable gain amplifier gain 1, 10, 100 or gain 1, 2, 4, 8
- Complete 12 bit A/D converter with internal S/H and reference (100 KHz)
- Full-scale input range +/- 10 V (gain = 1)
- 4 channels of 12 bit D/A conversion, simultaneous load
- Output range +/-10V, 0V after RESET
- Factory calibrated, calibration information in Identification-PROM unique to each IP
- Operating temperature -40°C to +85°C

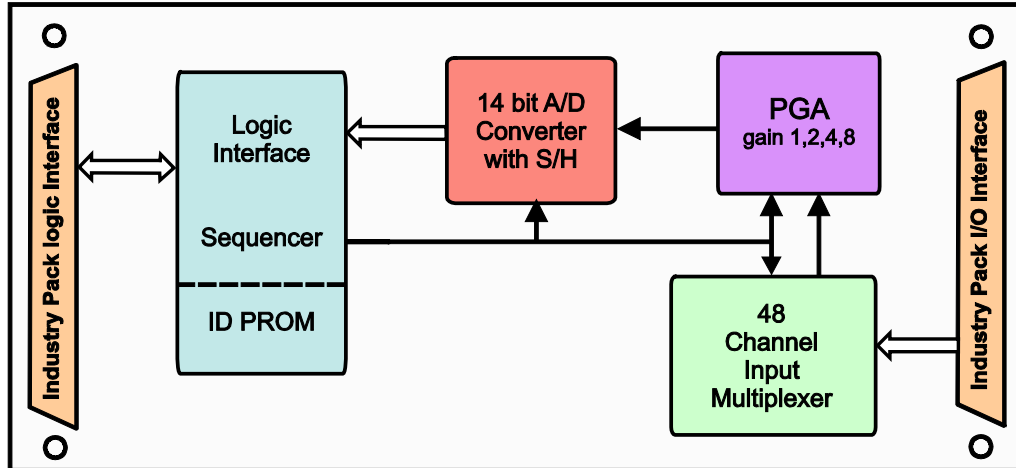

Order Information

RoHS Compliant

TIP850-10R 16 Channel multiplexed 12 bit A/D, gain 1,10,100, +/-10V; 4 Channel D/A, +/-10V
TIP850-11R 16 Channel multiplexed 12 bit A/D, gain 1,2,4,8, +/-10V; 4 Channel D/A, +/-10V

For the availability of non-RoHS compliant (lead solder) products please contact TEWS.

Documentation

TIP850-DOC User Manual

Software

TIP850-SW-25 Integrity Software Support
TIP850-SW-42 VxWorks Software Support (Legacy and VxBus-Enabled Software Support)
TIP850-SW-65 Windows Software Support
TIP850-SW-72 LynxOS Software Support
TIP850-SW-82 Linux Software Support
TIP850-SW-95 QNX Software Support

For other operating systems please contact TEWS.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com