



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation


**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)



Dimensions

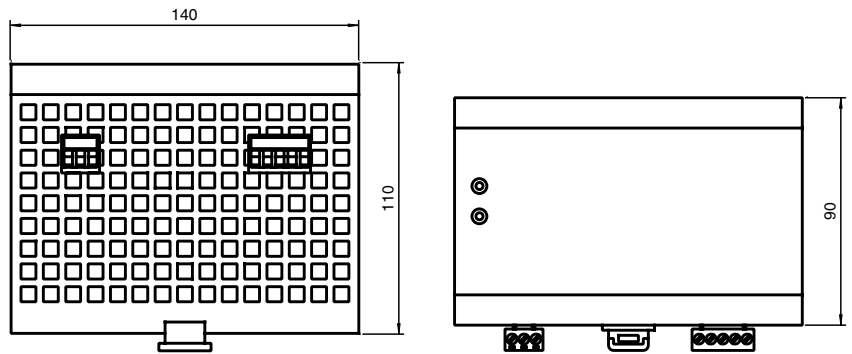

Electrical connection

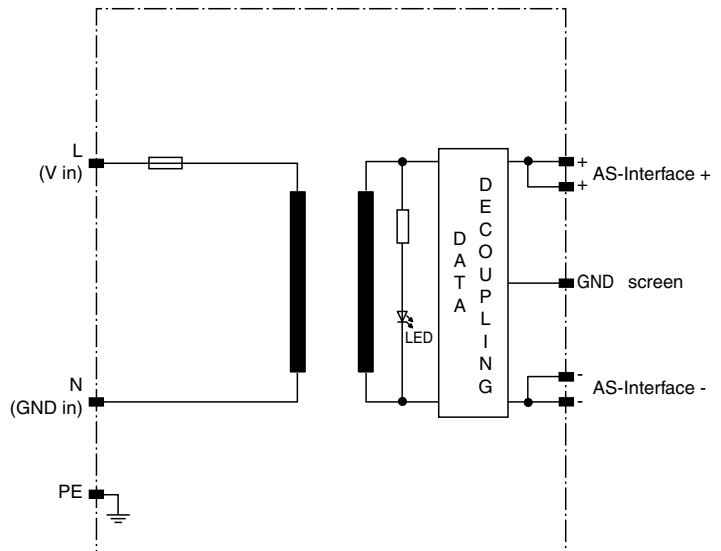

Model Number

VAN-115/230AC-K8

AS-Interface power supply


Features

- AS-Interface certificate
- PELV
- LED operating display
- Up to 2.8 A output load
- 115 V AC to 230 V AC
- AS-Interface filter integrated
- Power factor correction
- Cable fed in from below

Function

The VAN-115/230AC-K8 power supply unit supplies a fully loaded AS-Interface system with an output current of 2.8 A. The sinusoidal current consumption of the power supply prevents harmonic waves; thus this power supply unit has a particularly low susceptibility to faults. The powerfactor correction ensures that the current is in phase with the voltage, so the capacity factor of  $\cos \varphi > 0.97$  prevents reactive power.

Indicating / Operating means

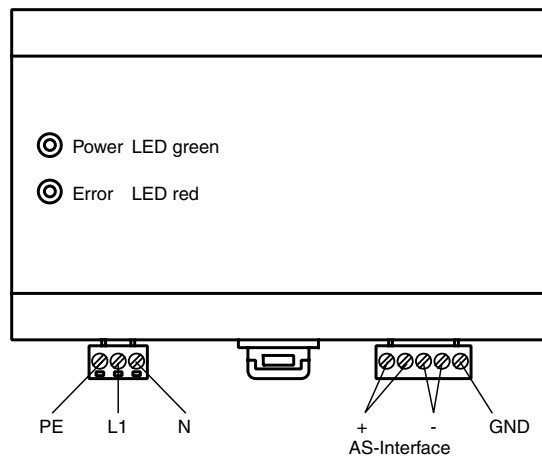

Release date: 2005-08-01 12:19 Date of issue: 2005-08-01 04:3202\_ENG.xml

**Technical data****Indicators/operating means**

LED ERROR	overload display (beginning at 2.9 A output current); LED red
LED ENERGY	operating display; LED green

**Electrical specifications**

Fusing	version TR5, 2 A delayed soldered in permanently internally
Capacity factor	at $U_E = 115 \text{ V}$ : 0.99 at $U_E = 230 \text{ V}$ : 0.97
Mains frequency	47 ... 63 Hz
Rated operational voltage	$U_e$ nominal: 115 ... 230 V AC permissible: 98 ... 265 V AC
Rated operational current	$I_e$ 0.4 ... 1.2 A
Ripple	according to AS-Interface specification

**Output**

Current limit	3.5 A
Current	2.8 A
Voltage	29.5 ... 31.6 V DC

**Standard conformity**

Standards	emitted interference to: EN 55022:1995 Class A, VDE 0878 Part 22:12.1995 interference resistance in acc. with: EN 50082-2:1995, ENV 50140:02.95, ENV 50141:1994, ENV 50142:10.95, VDE 0839 Part 82-2:02.1996, VDE 0847 Part 3, VDE 0843 Part 4/5/6
-----------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Ambient conditions**

Ambient temperature	0 ... 70 °C (273 ... 343 K)
Storage temperature	-25 ... 85 °C (248 ... 358 K)

**Mechanical specifications**

Protection degree	IP20 according to EN 60529
-------------------	----------------------------



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)