



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

KAD/DSI/003/B

24-ch. bi-level input module with counters and time tagging

FEATURES



- 24 differential-ended (D/E) discrete bi-level input channels
- 8 x 32-bit counters (period, frequency, events and so on)
- FIFO-based time tagging
- Programmable¹ threshold
- Programmable¹ hysteresis (for slow slew rate, high noise applications)
- Programmable¹ falling/rising edge detect (for counters only)

2


1. Programmable for each channel separately

DESCRIPTION

The KAD/DSI/003/B is used to monitor the status (high/low) of up to 24 differential ended (D/E) discrete channels. Eight of these have alternative functions as programmable counters, of which four can be configured as resettable event counters. Another 16 channels can be used to trigger time-tagged events. All 24 discrete signals are sampled simultaneously and can be read as a 16-bit +8-bit word or as a 12-bit + 12-bit word. The KAD/DSI/003/B uses 24 separate 14-bit A/Ds operating continuously at 111ksps to sample each input thus enabling the threshold and hysteresis to be programmed separately for each channel.

The eight counters can be programmed as period, frequency, events_since_last_read, events or elapsed time. The range of each counter is programmable as is the threshold, hysteresis sensitivity to the rising/falling edge and roll-over. If the counter uses more than 16 bits, they are treated as two words.

The 16 channels control the time tagging to the 8K FIFO. For each input time tagging can be triggered by a rising and falling edge or neither (when the channel is disabled). Every time a trigger occurs a 64-bit word is written to the FIFO consisting of the 16 inputs (after the change) and the BCD time that the event happened (up to 23 hours 59 minutes 59.99 9999 seconds).

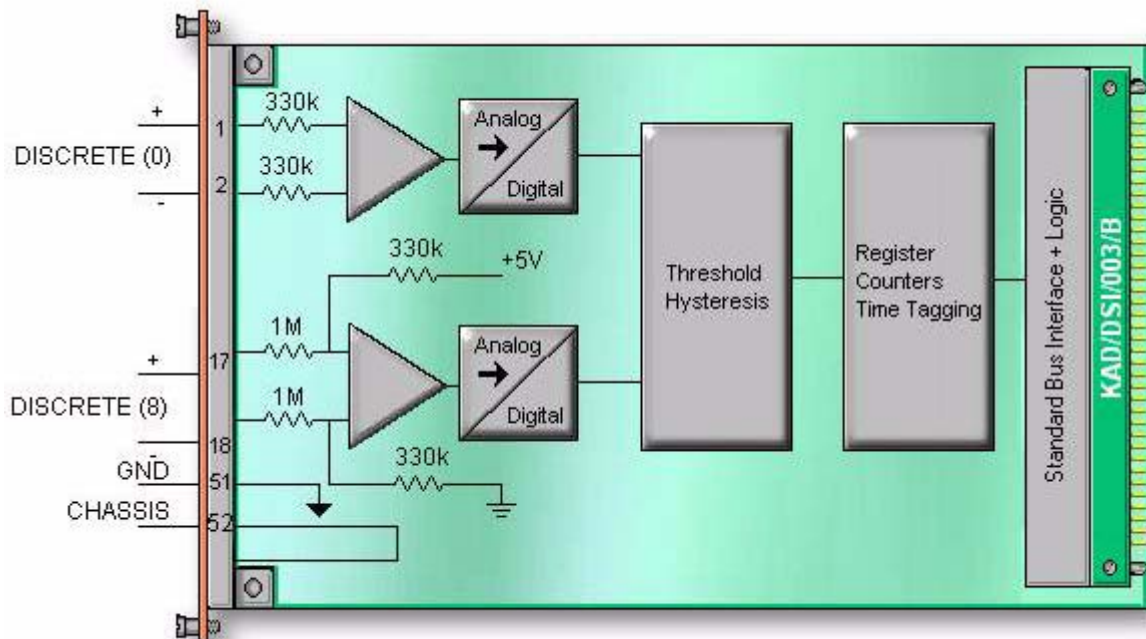

First of 24 discrete inputs (first of 8 counter inputs)



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com