



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

PXI Laser Source / Measure Module



www.pxit.com

info@pxit.com

Model Number: PX2000-305

General:


The PX2000-305 is a high performance programmable constant current source and voltage measurement unit compatible with the PXI format. A compliance voltage can be programmed to prevent voltage excursions outside programmed limits. It includes PXIT's patented 'Sequence Engine' technology and on board memory thus allowing it to independently synchronise and communicate with other modules in PXIT's Photonic range. The PX2000-305 can be used In conjunction with other PXIT photonics modules such as the PX2000-306 Dual Optical Power Meter for the test and characterisation of tuneable laser diodes.

Features

- Integrate on a master slave basis with other 305's or other PXIT Photonics Cards.
- High Speed Real Time Sequence Engine– >5000 current steps per Second.
- Fully floating output allowing 'star ground' connections for multiple units.
- 2MB on board memory for data storage and sequence instructions.
- Voltage measurement with 'Kelvin' connection.
- 16-bit stimulus and measure.
- Compliance voltage programmable from 0 to 8V.
- Small footprint / PXI Modular Architecture.
- Calibration data stored in on-board NV Ram.

Typical Applications:

- Laser Diode Test (LIV) of DFB's and VCSEL's
- Tuneable Laser Test using multiple cards
- Light Emitting Diodes
- Signal Diode DC Test

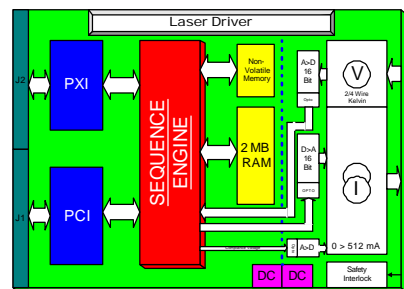


Software for Windows 98, ME, NT & 2000

PX Panel Panel Suite allows real time control of all OPM functions for "bench-top instrument" use.

Drivers Drivers are available for VISA®, LabVIEW® and LabWindows/CVI®. Additional support is provided for TestStand®, Visual Basic®, C and C++ through documented DLL's and example programs.

PXInstall Our install wizard gets you up and running in minutes !

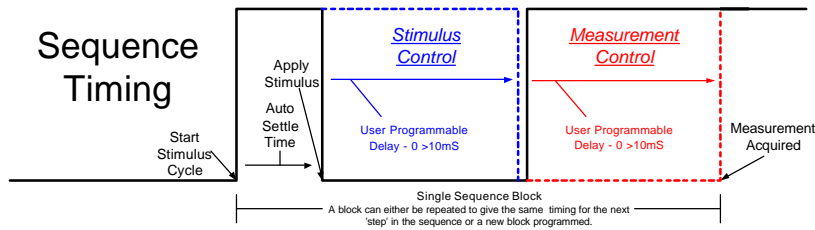

Specification	
Parameter	Constant Current Source
Current Range	250 / 500mA (PX2000 -305), 20/ 100mA (PX2000 -305L)
Accuracy	±0.05%
Basic Resolution	16 bits : 4uA / 8uA (PX2000 -305), 0.4uA / 1.6uA (PX2000 -305L)
Compliance Voltage	0 - 8V
Compliance Voltage Accuracy	±0.1% ±40mV
Output Slew Rate	20mA/μs (Δ<100mA)
Front panel safety interlock	2 contacts must be closed for output to be on. Multiple interlocks can be connected in parallel.
DC Voltage Measurement	
Voltage Range	0 - ±10V
Accuracy	0.1% ±2mV
General	
Stimuli & Measurements Rate	>5000 per Second
Connector Interface	4mm sockets for current out. 9 pin 'D -type' for all other
Form Factor	3U PXI – single slot width
Trigger	Local Bus and Trigger Bus + front panel access
Front Panel Indication	Single LED – 'Green' indicates all 'OK' 'Red' indicates 'over current' or 'over voltage' condition.
Sequence Engine Specifications	
Master Clock	20MHz
Min Step	25uS
Max Step	10mS
Max Memory Blocks	100,000 Each new block describes a change in the basic sequence timing
Max steps in a single sequence / burst	500,000
Memory	2 Mbyte

Ordering Information

PX2000-305

Source Measure Module 250/500mA

PX2000-305L

Source Measure Module 20/100mA



Technology Centre
PX Instrument Technology Ltd
Unit 32 Beechwood Close,
Boghall road, Bray,
County Wicklow, Ireland
Tel : (353) 1-2864221
Fax : (353) 1-2864223

U.S Branch Office
PX Instrument Technology
1807 Elmhurst Drive,
Arlington, TX 76012
Tel: +1 817-226 PXIT
Toll Free 866-878 3289
Fax: +1 817-461 2311

European Branch Office
PX Instrument Technology
Olgastr. 11,
D-73033 Göppingen, Germany

Tel: +49 7161 659210
Fax: +49 7161 659211



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com