



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗


WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

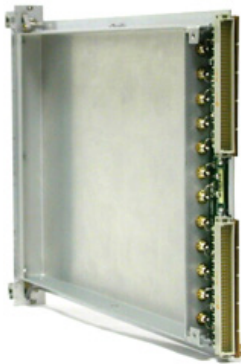

Racal Instruments™

7066

RF Prototyping Module

OBSOLETE

The Racal Instruments™ 7066 is ideal for adding specific RF and Microwave modules into a VXIbus system. The 7066 decouples and filters the VXIbus backplane power lines for use within the shielded enclosure.

Key Features

- For RF and microwave applications
- Decoupled and filtered power lines from VXIbus backplane
- Shielded RF compartment
- Low cost, 1 or 2-slot, C-size modules

Product Information

Add Microwave Functions to VXIbus Systems

This module enables RF components or sub systems to be conveniently added to a VXIbus system. RF/Microwave couplers, splitters, amplifiers or up-and-down converters can be added to your system in this fully shielded module. If additional cooling is required, holes may be drilled in the modules shield to provide air circulation.

VXIbus Power is Accessible

The 7066 fully utilizes the available power from the VXIbus by connecting to multiple power pins on the P1 and P2 connectors. This gives you custom RF circuitry access to 7 A on the +5 V rail, 5 A on the -5.2 V rail and 1 A for all others. Single or double slot versions are available but only one row of P1/P2 connectors are used (i.e. no difference in power capability).

Specifications

Note: The Astronics Test Systems policy is one of continuous development and improvement. Consequently, the equipment may vary in detail from the description and specifications in this publication.

Prototyping Features

Breadboarding Space

- 11.58 in (289 mm) x 8.36 in (209 mm): 97 in²

RF Compartment

- Sealed (no cooling holes), either single or double (Opt. 01) wide

Supplies to RF Compartment

| | | | | | |
|-----|-----|-----|------|-----|-----|
| +24 | +12 | +5 | -5.2 | -12 | -24 |
| 1 A | 1 A | 7 A | 5 A | 1 A | 1 A |

Lower voltages loss <10 mV/A Higher voltages loss <20 mV/A

Power Supply Filtering (insertion loss at specified frequency)

- 10 MHz: 20 db
- 100 MHz: 65 dB
- 500 MHz to 1 GHz: 70 dB

Optional Features

Option 01

- Double Wide RF Compartment

Environmental

Temperature

- Operating: 0° C to 50° C

EMI

- Meets MIL-STD-461C CEO3/REO3

EMC (Council Directive 89/336/EEC)

- Meets CE requirement but dependent upon added circuitry.


Safety (Low Voltage Directive 3/23/EEC)

- EN6010-1, IEC1010-1, UL3111-1, CSA 22.2#1010

Mechanical

Cooling (single slot)

- 21° C Rise with 40 W Dissipation in RF Compartment.



Ordering Information

R-7066 : Racal Instruments™ 7066

Single Slot RF Prototype Module

R-7066/01 : Racal Instruments™ 7066-01

Double Slot RF Prototype Module

R-7066/02 : Racal Instruments™ 7066-02

Triple Slot RF Prototype Module



All trademarks and service marks used in this document are the property of their respective owners.

- Racal Instruments is a trademark of Astronics Test Systems Inc. in the United States and/or other countries



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com