

Merrimac QHB-2-70B

Power Divider / Combiner



© Artisan Technology Group

\$125.00

In Stock

Qty Available: 1

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/50327-3>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.


Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**PRINCIPAL SPECIFICATIONS**

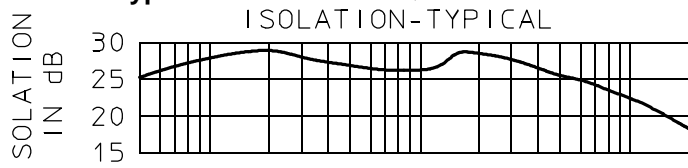
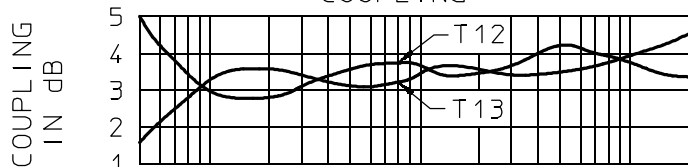
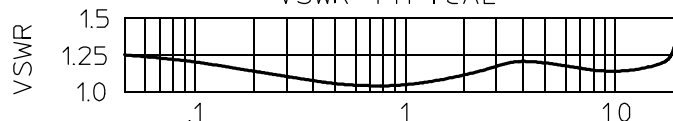
Model Number, BNC	Model Number, SMA	Freq. Range, MHz	Amplitude Balance, dB, Max.	Bandwidth Ratio	Insertion Loss, dB, Max.	Phase Tolerance	VSWR, Max.	Isolation, dB, Min.	Weight, oz.(g) Nom.
QH-7-4.9	QHM-7-4.9	0.1 - 10	1.0	100 : 1	1.5	$90^\circ \pm 5^\circ$	1.3:1	20	16(448)
QH-7-15	QHM-7-15	0.5 - 30	1.0	60 : 1	1.5	$90^\circ \pm 3^\circ$	1.3:1	20	7(196)
QH-7-17	QHM-7-17	2 - 32	1.0	16 : 1	1.0	$90^\circ \pm 3^\circ$	1.3:1	20	7(196)
QH-7-41	QHM-7-41	2 - 80	1.0	40 : 1	1.5	$90^\circ \pm 3^\circ$	1.3:1	20	7(196)
QH-7-126	QHM-7-126	2 - 250	1.3	125 : 1	2.0	$90^\circ \pm 6^\circ$	1.4:1	18	7(196)

General Notes:

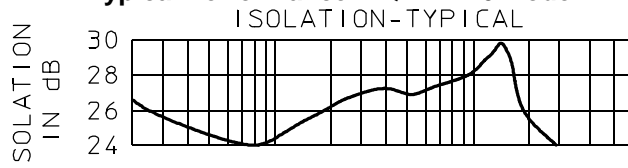
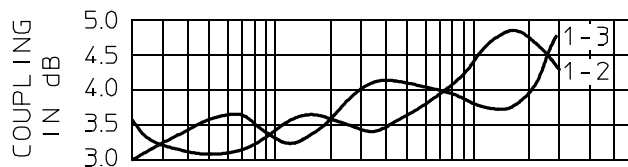
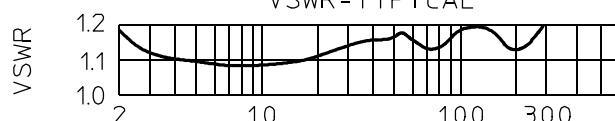
1. The QH-7 Series consists of multi-octave models with bandwidth ratios ranging from 16:1 to 125:1. Their function is to split an input signal into two equal amplitude, isolated outputs having a quadrature phase relationship. Conversely, these units may be used to combine two quadrature phased, equal amplitude signals into a single output.

GENERAL SPECIFICATIONS

Nominal Coupling: – 3 dB nom.
 CW Input: 1 W max. (1.2:1 VSWR_{out})
 (0.1 W for QH-7-4.9)
 Impedance: 50 Ω nom.
 Operating Temp: – 55° to +85°C

Typical Performance - QH-7-4.9 Model**ISOLATION-TYPICAL****COUPLING****VSWR-TYPICAL**

FREQUENCY IN MHz

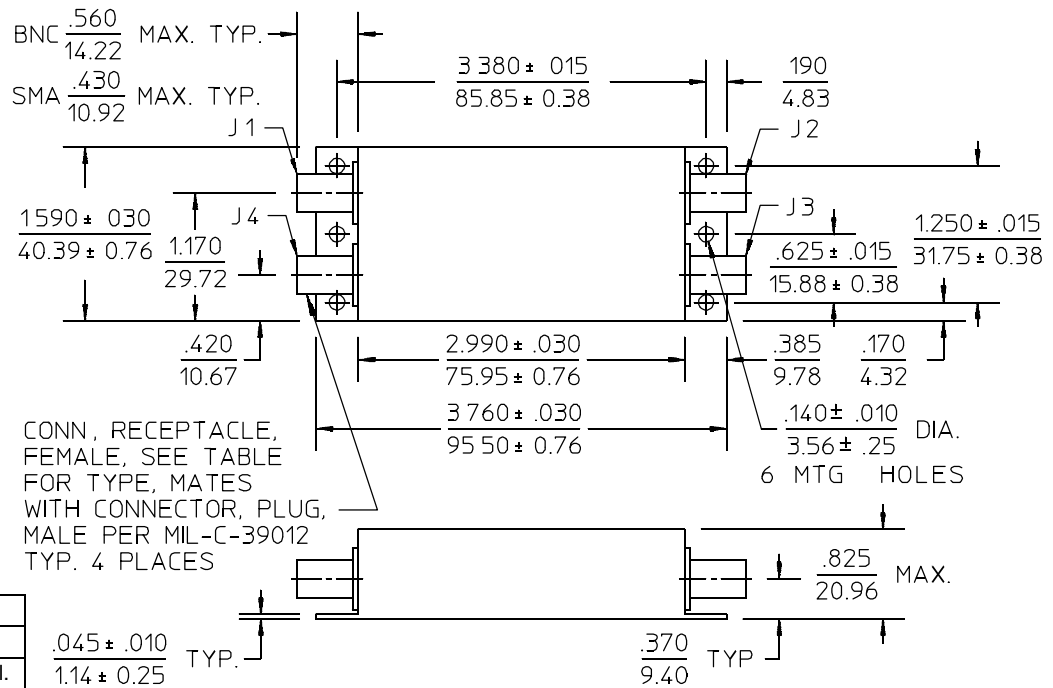
Typical Performance - QH-7-126 Model**ISOLATION-TYPICAL****COUPLING****VSWR-TYPICAL**

FREQUENCY IN MHz 24Apr96

QH & QHM-7 Series 90° POWER DIVIDERS/COMBINERS

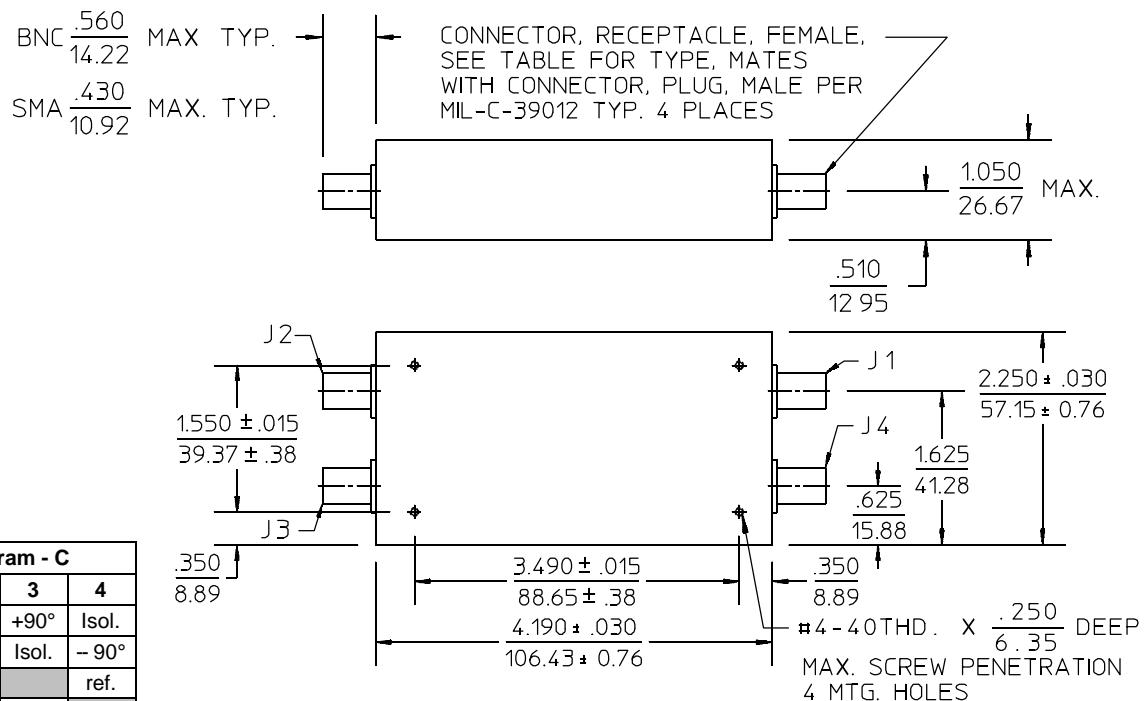
100 kHz to 250 MHz / Multi-Section Lumped Element Designs / BNC & SMA Versions

QH/QHM-7 Outlines (except QH/QHM-7-4.9)



NOTES: 1. Tolerance on 3 place decimals ±.020(.51) except as noted.
2. Dimensions in inches over millimeters.

QH/QHM-7-4.9 Outline



NOTES: 1. Tolerances on 3 place decimals ±.020(.51) except as noted.
2. Dimensions are in inches over millimeters.

24Apr96

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisan^{tg}.com](https://www.artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisan^{tg}.com | [artisan^{tg}.com](https://www.artisantg.com)

