

MetraByte DAS-16F

## Plug-In Data Acquisition Board



Artisan Technology Group

**In Stock**

**Used and in Excellent Condition**

**Open Web Page**

<https://www.artisanng.com/64751-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

## DAS-16 Series

Compatible with existing applications.  
For new applications see the DAS-1600 Series.

50 to 100 Kilosample/Second  
ISA-Bus Analog I/O Boards

### FEATURES

- Up to 100 ksamples/s (DAS-16F)
- Up to 70 ksamples/s (DAS-16G)
- Up to 50 ksamples/s (DAS-16)
- Software-selectable input ranges (DAS-16G)
- 16 single-ended/8 differential analog inputs
- 2 channels of multiplying 12-bit D/A output
- 4 digital outputs, 4 digital inputs
- 16-bit DriverLINX software drivers for Windows 95/98—ActiveX and DLL based
- TestPoint drivers
- New start-up software included

### APPLICATIONS


- Signal analysis
- FFT & frequency analysis
- Vibration analysis
- Transient analysis
- Production test
- Process control

### Functional Description

The DAS-16 Series consists of the DAS-16, DAS-16F, and DAS-16G high-speed analog and digital interface boards for ISA-bus compatible PCs. The boards install directly into a computer expansion slot, turning it into a high-speed, high-precision data acquisition instrument.

Each member of the DAS-16 Series has similar functionality with the following differences:

- The DAS-16 has switch selectable input ranges and a 50 ksamples/s maximum input rate.
- The DAS-16F has switch-selectable input ranges and a 100 ksamples/s maximum input rate.
- The DAS-16G1 and DAS-16G2 have software-programmable input ranges and a 70 ksamples/s maximum input rate.

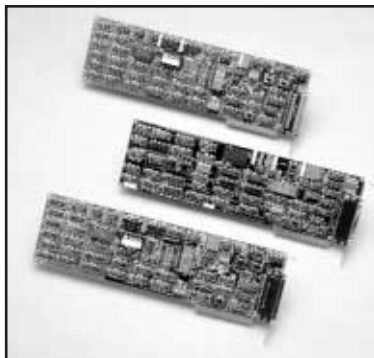

The DAS-16 Series offers 16 single-ended or 8 differential analog inputs with 12-bit resolution. The inputs are switch-selectable for unipolar (e.g., 0 to 10V) or bipolar (e.g.,  $\pm 10V$ ) input ranges.

A 3-channel programmable interval timer (Intel 8254) provides timing for the A/D or can be used for generating frequency outputs at any rate from 2.5MHz to 1 pulse/hr.

Two channels of multiplying 12-bit D/A converters provide analog outputs. The DAS-16 Series uses an onboard -5V reference for a 0 to +5V output range, or external references can be used to generate other output ranges.

Eight bits of digital I/O (4 input and 4 output) allow the DAS-16 Series to interface to a variety of digital signals. These digital bits can control multiplexers, read external status, gate the counter/timer, etc.

Get "Up & Running" Quickly  
with Keithley's FREE  
Bundled Start-Up Software




### Software

The array of free software included with Keithley's data acquisition products helps developers get applications "Up and Running" quickly. For example, a new start-up software utility makes it possible to interact with a new board in a matter of minutes. Software drivers are provided on a CD for fast, uncomplicated installation. These 16-bit DriverLINX device drivers for Visual Basic, C/C++, and Delphi also help speed defining new applications by offering both DLL and ActiveX interfaces. A variety of useful examples and on-line help are provided with Keithley's software. Of course, Keithley's easy-to-use application development package, TestPoint, takes advantage of the DriverLINX feature set.

- FREE new bundled start-up software
- DriverLINX 16-bit Device Drivers—Visual Basic, C/C++, Delphi, TestPoint, DLL, and ActiveX
- Runs under Windows 95/98

### Configuration Guide

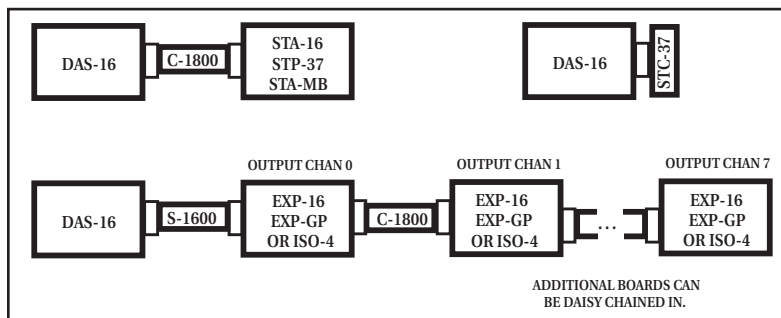

### Connector Pin Assignments

|                       |    |    |                |
|-----------------------|----|----|----------------|
| L.L. GND              | 19 | 37 | CH0 HI IN      |
| CH0 LO IN/*CH8 HI IN  | 18 | 36 | CH1 HI IN      |
| CH1 LO IN/*CH9 HI IN  | 17 | 35 | CH2 HI IN      |
| CH2 LO IN/*CH10 HI IN | 16 | 34 | CH3 HI IN      |
| CH3 LO IN/*CH11 HI IN | 15 | 33 | CH4 HI IN      |
| CH4 LO IN/*CH12 HI IN | 14 | 32 | CH5 HI IN      |
| CH5 LO IN/*CH13 HI IN | 13 | 31 | CH6 HI IN      |
| CH6 LO IN/*CH14 HI IN | 12 | 30 | CH7 HI IN      |
| CH7 LO IN/*CH15 HI IN | 11 | 29 | L.L. GND       |
| D/A 0 REF IN          | 10 | 28 | L.L. GND       |
| D/A 0 OUT             | 9  | 27 | D/A 1 OUT      |
| VREF (-5 V)           | 8  | 26 | D/A 1 REF IN   |
| POWER GND             | 7  | 25 | IP0/TRIG 0     |
| IP1                   | 6  | 24 | IP2/CTR 0 GATE |
| IP3                   | 5  | 23 | OP0            |
| OP1                   | 4  | 22 | OP2            |
| OP3                   | 3  | 21 | CTR 0 CLOCK IN |
| CTR 0 OUT             | 2  | 20 | CTR 2 OUT      |
| +5 V PWR              | 1  |    |                |

\*ALTERNATIVE CONNECTIONS  
REAR VIEW OF I/O CONNECTOR  
(37-PIN MALE "D")

### QUESTIONS?

1-800-552-1115 (U.S. only)

Call toll free for technical assistance,  
product support or ordering information, or  
visit our website at [www.keithley.com](http://www.keithley.com).

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

