ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Alta Data Technologies PC104P-MA4-1D8* at our website: *Click HERE*

PC104P-MA4

Multi-Channel, Multi-Protocol 1553 and ARINC Interface for PC104-*Plus* Systems






A/D Signal Capture on First 1553 Channel & First Two ARINC RX

Alta Data Technologies' PC104P-MA4 interface module is a multi-channel, multi-protocol 1553 and ARINC PC104-*Plus* interface card supported by the latest software technologies. The PC104P-MA4 card is based on the industry's most advanced 32-bit FPGA protocol engine, ***AltaCore***™, and by a feature-rich application programming interface, ***AltaAPI***™, which is a multi-layer ANSI C and Windows .NET (MSVS 2005/08/10 C++, C#, VB .NET) architecture. This hardware and software package provides increased system performance and reduces integration time.

AltaCore-1553 is guaranteed 1553B Notice II & IV and ARINC compliant and all cards are manufactured to the highest IPC-610 Class 3 standards and ISO 9001:2008 processes. Cards are available in 1553 dual-function (BC/Mon or multi-RT/Monitor) or full-function (BC, mRT and Mon) configurations. Playback and Signal Generation are part of BC operations and Waveform Capture is for Monitor only operation. Alta is committed to a risk free integration and will be glad to help with any level of your system development.

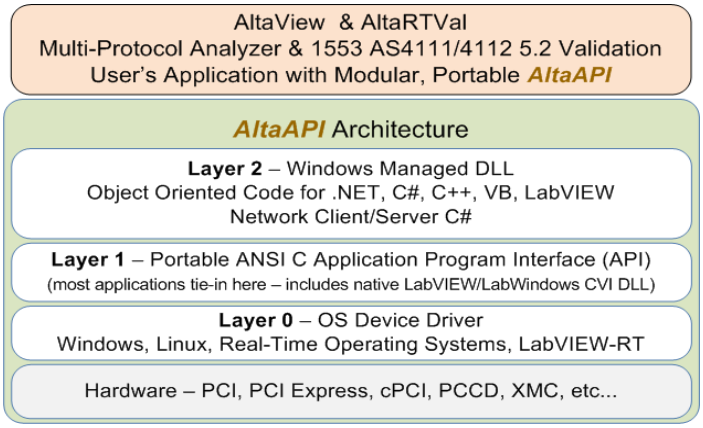

Alta's Advanced Software Architecture

Key Features:

- **One or Two Independent, Dual Redundant MIL-STD-1553 Channels**
- Dual Function 1553 (BC/Mon or mRT/Mon) or Full Function (BC/mRT/Mon)
  - One Mbyte RAM per 1553 Channel
- **ARINC – 8 Channels Total:**
  - 4 Shared TX/RX & 4 Dedicated RX
  - One Mbyte of RAM for all Channels
- ***Capture 1553 & ARINC Waveforms***
  - First 1553 Channel & First Two ARINC RX Channels
  - 8-bit, 50 nSec for 1553 – 1 uSec for ARINC A/D for Voltage Measurements
- Channels May be Factory configured for fixed ARINC RX/TX or Monitor only 1553
- **Available as PCI/104 Form Factor**

- Commercial, Industrial (Extended) Temperature and Conduction Cooled
- Advanced BC & ARINC TX Frequency Controls: 1553 Framing/Subframing;
- RT/ARINC RX Full Buffering with 64-bit 20 nsec Time Tags
- Advanced, Multi-layer *AltaAPI* Provided at No Cost with Source Code
- 32 & 64-bit Windows & x86 Linux
  - .NET Managed DLLs
  - Contact Factory for Latest RTOS and NI LabVIEW Support
- True HW Playback (BC or TX)
- Industry First: 20/1000 ns Signal Generation
  - Bit Construction
  - Supports RT Validation Testing
- IRIG-B RX PAM or RX/TX PPS Ext Clock
- Avionics/ RS-485 Discretes
- Advanced BIT Features and Dual Temperature Sensors
- Full HW Interrupt Features
- PCI 32 Bit, 33/66MHz & PCI-X Compatible

www.altadt.com

4901 Rockaway Blvd., Building A Rio Rancho, NM 87124 USA
(In US): 888-429-1553 (Outside US): 505-994-3111 Fax: 805-504-8588

Multi-Channel, Multi-Protocol Avionics

PC104P-MA4 Specifications

General

- PC/104-Plus Compliant
- 32-Bit PCI 33/66MHz/PCI-X Compatible
  - PCI-SIG PCI 2.1 Compliant
- **1-2 MIL-STD-1553B Notice II & IV Channels**
- **4 Shared RX/TX & 4 RX ARINC Channels**
- Dual and Full Function 1553 Channels
- Connectors
  - 1553: 10-Pin Locking Molex
  - ARINC: 20-Pin Molex
  - AUX: 16-Pin Locking Molex
- Weight: 6oz/180grams
- Power (Estimated @ Max Bandwidth) 4-5W
- Parts Temp (C) : -55 to +120 Storage, 0 to +70 Commercial, -40 to + 85
- Extended6 Avionics, One RS-485 Discretes, One TTL I/O
- Loop-Back & User BIT, Dual Temp Sensors
- IRIG-B RX PAM, TTL/RS-485 PPS Time Sync
- IPC Class 3 and ISO 9001:2008 Processes

BC & ARINC TX Features

- Variable Framing and Subframing
- Schedule Message Timing in Frames or Intermessage/Label Gap Spacing
- Low and High Priority Aperiodic Scheduling
- ARINC TX Has Complete Frequency Control Per Channel – No Framing/Subframing
- Infinite Linked Data Buffers
- Interrupts, No-Ops, Ext Trigger
- 1553 Legal and Reserved Mode Codes
  - 1553A and 1553B Support
- 64-Bit, 20 ns Time Tags
- Full Error Injection/Detection

1553 RT Features

- Infinite Linked Data Buffers
- Legal and Reserved Mode Codes
  - 1553A and 1553B Support
  - Full Buffering of All Mode Codes
- 64-Bit, 20 ns Time Tags
- Full Error Injection/Detection

ARINC RX Features – 3 RX Modes

- Channel Level Label/Word Tables
- Multi-Channel Data Tables for All Channels
- Channel Level Current Value Tables
- ARINC 717 Frame Support
- 64-Bit, 20 nsec Time Tags
- Full Error Detection

Playback/Signal Vector (BC or ARINC TX)

- Real Hardware Playback from Archive Files.
- Signal Vector Generation **INDUSTRY FIRST**
- 20 nSec 1553 Vectors and 1 uSec ARINC Vectors

1553 Monitor

- Sequential and RT Mapped Monitoring with Infinite Linked CDP Data Buffers
  - Available with All Card Models
  - 64-Bit, 20 ns Time Tags, Interrupts, Triggers
  - Full Error Detection
- 8-bit, 50 nSec 1553 and 1 uSec A/D Waveform Signal Capture. 1st Channel 1553 and First 2 RX of ARINC
  AltaView Software is Ideal for Signal Display

Software: *AltaAPI & AltaView*

- Multi-Layer ***AltaAPI*** Architecture to Support Windows , .NET and ANSI C Linux, VxWorks, Integrity, etc…
  - Contact Factory For RTOS Platforms
  - LabVIEW & RT No Cost
- Optional ***AltaView*** is Based on the Latest Windows MS Office User Interface Style with Ribbon-Bar
  - Full Analyzer Integration Tool
  - Multi Language Support

Part Numbers

Add Suffix **-D** or **-F** for 1553 Dual or Full Function and Channel Count (**1** or **2**). Add "**8**" for ARINC.

Example: PC104P-MA4-**2F8**

Contact Factory for Desired Channel Configuration.

Options: -E for Ext Temp Parts (-40 to +85C), -F for Conformal Coating, -A for AltaView, -G for PCI/104.
Example: PC104P-MA4-2D8-AEFG

5 Year Limited Warranty!

EU and China RoHS Compliant

Contact Alta for Special Lead Build Configurations

AltaAPI Software with ANSI C Source, .Net Managed DLLs and LabVIEW & LabVIEW-RT Provided at No Cost.

Alta Data Technologies LLC
4901 Rockaway Blvd., Building A
Rio Rancho, NM 87124 USA
888-429-1553 (in US)
505-994-3111 (outside US)
alta.sales@altadt.com
www.altadt.com

Information in this data sheet is subject to change without notice. Alta is not responsible for errors or omissions. All trademarks are reserved by their respective owners. AltaCore, AltaAPI, AltaView and AltaRTVal are trademarks of Alta Data Technologies.1312-1 – Page 2/2

Alta dt data technologies

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP