ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Alta Data Technologies USB-MA4-1D8* at our website: ***Click HERE***

USB-MA4™


Multi-Channel 1553 and/or ARINC USB 3.0 SuperSpeed® Appliance

Industry First!
USB SuperSpeed Appliance
Full Featured 1553 & ARINC



Very Small
~110x89x17mm

O-Scope A/D Signal Capture Included on First Channel of 1553 and First 2 Channels of ARINC

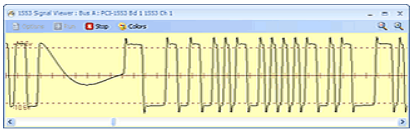


- **One or Two Dual Redundant 1553 Channels**
  - Dual (BC/BM or mRT/BM) or Full Function (BC/mRT/BM) Modes

And/Or

- **Eight ARINC-429/717 Channels**
  - 4 RX/TX & 4 RX; First 2 Channels Share 717
- **USB SuperSpeed. Compatible with USB 2**
  - **Recommend USB 3.0 SuperSpeed (SS Trident Logo) for all applications. ~5-10K Packets/Sec Total.**
  - USB 2.0 or hub performance is dramatically less. Hubs/Converters/USB 2.0 NOT recommended except for low bus loading or simple, on-demand tests.
- **AltaAPI SDK Provides Easy Integration** – Quickly code your application with our modular, portable SDK. Great NI LabVIEW/Windows support, too. Single Application Only.
  - **Windows 7/8/10 and Specific Linux Builds Only**
  - Other Windows Applications May Affect Performance

- USB 3.0 B to Host USB 3.0 A Cable Provided. Host side compatible to USB 2.0 A connectors.
- 1553, ARINC and Auxiliary (Aux) Signals via **J1** Honda Connector.
- **Optional J1 Cables:**
  - 1553 Jacks Only
  - 1553 Jacks with DB26 for ARINC and Aux
  - DB26 Only for ARINC and Aux
  - Aux Signals Include Avionics Discretes (6), Triggers, TTL and IRIG RX Clock

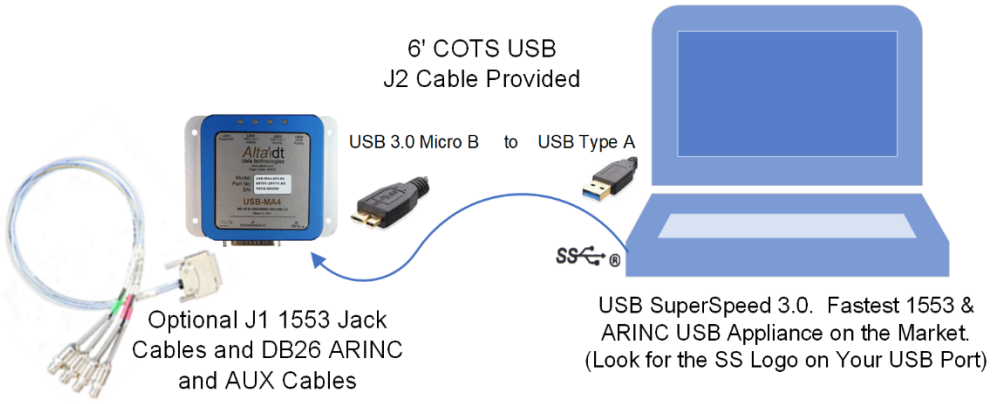

Optional ***AltaView*** Windows Analyzer. Full 1553 or ARINC Control with Signal Capture.



www.altadt.com

4901 Rockaway Blvd., Building A Rio Rancho, NM 87124 USA
(In US): 888-429-1553 (Outside US): 505-994-3111 Fax: 805-504-8588

SuperSpeed and the SuperSpeed USB Trident Logo is a registered trademark of the USB Implemeters Forum, Inc.

AltaCore-1553/ARINC
USB-MA4 Appliance Specifications

General

- USB 3.0 SuperSpeed Recommended
  - Compatible with USB 2, but NOT recommended
- Physical: 110x89x17mm; 180grams
- 1-2 Dual Redundant Independent 1553 Busses
  - Optional 1553 Variable Voltage
- **and/or** 8 ARINC Channels: 4 RX/TX & 4 RX
  - TX Extra RX Load; Unpowered RX Drain
- One Megabyte RAM Buffering Per Channel/Bank
- USB 3.0 Spec 5V @ 3A Bus Power:
  - Idle 3.6W
  - 100% TX Load, Full Channels: ~10W
  - **USB 2 Connections Must Supply Full Power**
- 2 Temp Sensors: TX and FPGA
- Temp (C): 0-70 Operating; -55 to +120 Storage
- 5-95% humidity, non-condensing
- Transmit Inhibit Optional
- Flash Disable Factory Setting for Secure Mem
- 6 SE Avionics Discretes, One RS-485 Discrete, TTL Clock, Triggers
- IRIG-B DC or PAM RX
- Advanced Startup, User and Continuous BIT
- Single Application Only. Polling Interrupts

1553 BC & TX ARINC

- 1553 Framing, Subframing, Scheduling, Aperiodic
- ARINC TX Complete Frequency Control
- 1553 Legal and Reserved Mode Codes
  - 1553A and 1553B Support
- 64-Bit, 20 ns Time Tags
- Full Error Injection/Detection

1553 RT Features

- Circular Linked Data Buffers SAs and MCs
- Legal, Reserved, and 1553A Mode Codes
- 64-Bit, 20 ns Time Tags
- Full Error Injection/Detection

1553 Bus Monitor

- Sequential Monitor
- RT SA Map Monitor
- 64-bit, 20 ns Time Tags and IRIG Sync

ARINC RX Features – 3 RX Modes

- Channel Level Label/Word Tables
- Multi-Channel Data Tables for All Channels
- 64-Bit, 20 ns Time Tags. Full Error Detection

Playback/Signal Vector (BC or TX)

- Real Hardware Playback from Archive Files.
- Signal Vector Generation at 20/1000 (1553/ARINC) ns **INDUSTRY FIRST**
- 20 nSec 1553 Vectors and 1 us ARINC Vectors
- 8-bit, 50 ns 1553 and 1 uSec ARINC A/D Waveform Signal Capture. 1st Channel 1553 and First 2 RX of ARINC

Software – *AltaAPI & AltaView*

- Multi-Layer ***AltaAPI*** *SDK* Architecture – Windows 10, C/C++, .NET, LabVIEW/Windows, etc..
- Optional ***AltaView*** Analyzer Windows Applications.
  - Full Analyzer Integration Tool & RT Validation Tools
  - Multi Language Support
- Linux Support for Specific Kernel Builds – Contact Factory for Kernel Support Details

Part Numbers (1553 and ARINC)

1553 Dual Function: BC/Monitor or mRT/Monitor

- **USB-MA4-1D8 or USB-MA4-2D8**

1553 Full Function: BC, mRT and Monitor

- **USB-MA4-1F8 or USB-MA4-2F8**

- **For 1553 Only Substitute "-1D0" example**
- **For ARINC Only Substitute "-0D8" example**

Options: Add -N for NVRAM Write Protection, -F for Conformal Coating, -I for TX Inhibit; -V 1553 Variable Voltage, –A for AltaView Analyzer Software.
Example: USB-MA4-2F8-AFINV

6ft USB 3.0 Micro B to Host USB 3.0 A Cable Provided. (Host side backward compatible to USB 2.0 A connectors.)

Optional J1 1553/ARINC Cables:

- **PCCDCAB-1553-1-01 or PCCAB-1553-2-01**
  - Single or Dual Channel 1553 Jacks Only
- **HTKCAB-AUX01:** DB26 Only for ARINC and Aux
- **HTKCAB-1-AUX01:** Single Channel 1553 w/ DB26
- **HTKCAB-2-AUX01:** Dual Channel 1553 w/ DB26

5 Year Limited Warranty!

EU and China RoHS Compliant

Non-Public Telcom/CE Device/Non Safety-Mission

Alta Data Technologies LLC
4901 Rockaway Blvd., Building A
Rio Rancho, NM 87124 USA
www.altadt.com
alta.sales@altadt.com
888-429-1553 or 505-994-3111

Information in this data sheet is subject to change without notice. Alta is not responsible for errors or omissions. All trademarks are reserved by their respective owners. USB/TBOLT-MA4, AltaCore, AltaAPI, AltaView and AltaRTVal are trademarks of Alta Data Technologies.2003-2 – Two Pages

Alta dt data technologies

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP