ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *B&K Precision 1760* at our website: ***Click HERE***

BK PRECISION
ELECTRONIC TEST INSTRUMENTS


Models 1760A &1761

Triple Output DC Power Supplies with 4-digit LED display

Data Sheet

Models 1760A, 1761

BK Precision's new Models 1760A & 1761 Triple Output DC Power Supply offers outputs with two 0-30V, 0-2A and one 4-6.5V, 5A(Model 1760A), 0-35V, 0-3A and one 2-6.5V, 5A(Model 1761) outputs with two 4-digit LED displays. The 4-digit LED displays offer 10mV and 1mA resolution which provides higher accuracy. This makes it an ideal supply for power sensitive applications. The 1760A &1761 are fully overload protected and comes with a two year warranty.

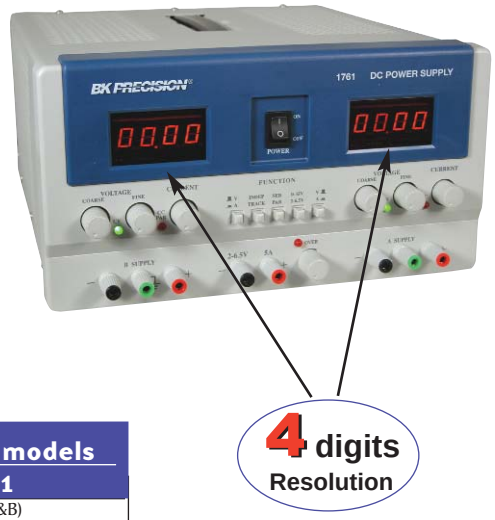

Specifications	models	
	1760A	1761
Output Voltage	0-30V (A&B)	0-35V (A&B)
	4-6.5V (C)	2-6.5V (C)
Output Current	0-2A (A&B)	0-3A (A&B)
	5A	5A
Constant Voltage Operation		
Voltage Regulation		
Line (120VAC +10%)	≤ 0.01% + 3mV	≤ 0.01% + 3mV
Load	≤ 0.01% + 3mV	≤ 0.01% + 3mV
Recovery Time	100μs	100μs
Ripple & Noise (5Hz to 1MHz)	< 1mVrms	< 1mVrms
Temperature Coefficient	< 300ppm°C	< 300ppm°C
Constant Current Operation		
Adjustable Current Range	5% to 100% (A&B)	5% to 100% (A&B)
Current Regulation		
Line (120VAC +10%)	< 0.2% + 3mA	< 0.2% + 3mA
Load	< 0.2% + 3mA	< 0.2% + 3mA
Current Ripple	< 3mA	< 3mA
Metering		
Display	2 four digit LEDs	2 four digit LEDs
Voltmeter Range	0-99.99V	0-99.99V
Voltmeter Accuracy	+(0.5% rdg + 9 digits)	+(0.5% rdg + 9 digits)
Ampmeter Range	0-9.999A	0-9.999A
Ampmeter Accuracy	+(0.5% rdg + 9 digits)	+(0.5% rdg + 9 digits)

B&K Precision Corporation
22820 Savi Ranch Parkway, Yorba Linda, CA 92887
Tel: 714-921-9095, Fax: 714-921-6422
www.bkprecision.com

Specifications subject to change without notice

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP