



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com


PIO-96W(PC)

96 Channel Bi-Directional TTL Digital I/O Board

2-31

PC HELPER SERIES

2

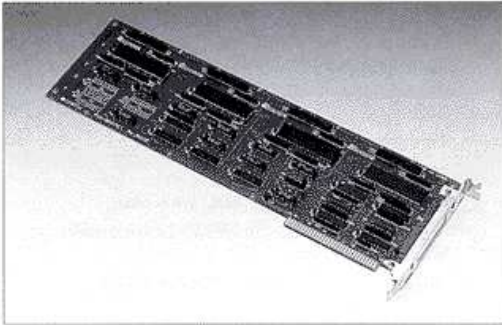

INTRODUCTION

The PIO-96W(PC) is a full-size IBM PC/AT add-on board that provides 96 fully programmable, bi-directional TTL-level input and output channels. All 96 channels are divided into four separate 24 channel groups. This board has four 8255-5 programmable peripheral interface ICs that can be programmed with the 8255A PPI's Mode 0 to Mode 2 operation. This board is useful for any number of applications such as contact closures or parallel data communication.

APPLICATIONS

- Interface with the DTP-/S24 SSR module racks
- Interface with parallel digital I/Os
- Interface with BCD-compatible devices
- Digital I/O control
- Contact closure or switch monitoring

FEATURES

- 96 bi-directional TTL digital I/Os
- Four 8255 PPIs on board
- 8255 PPI Mode 0 - Mode 2
- Enhanced interrupts - use only one IRQ

SPECIFICATIONS

Digital input/output

- No. of channels: 96
- Type: Bi-directional TTL level (positive logic)
- Programmable mode: 8255 PPI Mode 0 - Mode 2

Digital Inputs

- Input impedance: 20KΩ

Digital Outputs

- Output current: 5VDC 1mA max. (2LS-TTL load)

General

- Interrupts: C0 & C3 of Port C can generate an interrupt to IRQ 3-7 and 9, Enhanced interrupt feature: 8 interrupt lines use only one IRQ
- Throughput time: 300 ns min.
- I/O address: Any 32-byte boundary
- Power consumption: +5VDC 450mA max.
- Connectors: Four 30-pin header connectors
- Dimensions: 13.1" x 4.2" (340mm x 107mm)

PIN ASSIGNMENT

	A	B	
Port A	PA0	1 1	PB0
	PA1	2 2	PB1
	PA2	3 3	PB2
	PA3	4 4	PB3
	PA4	5 5	PB4
	PA5	6 6	PB5
	PA6	7 7	PB6
	PA7	8 8	PB7
Port B	GND	9 9	GND
	PC0	10 10	PC4
	PC1	11 11	PC5
	PC2	12 12	PC6
	PC3	13 13	PC7
	GND	14 14	GND
	VCC	15 15	VCC
Port C			Port C

(x4 Connectors)

ORDERING INFORMATION

PIO-96W(PC)

- 96 channel bi-directional TTL digital I/O board, user's manual and sample programs

SUPPORT-PAC(PC)603

- DOS driver support for BASICA, GW-BASIC, MS-C/C++, TurboPascal and assembly

API-DIO(PC)WIN

- WINDOWS driver support for MS-Visual BASIC, MS-C, MS-Visual C++, Borland C/C++/TurboPascal for Windows

For accessories and I/O circuit diagrams, see Product Configuration Guide and Digital I/O Circuitry section at the end of Section 2. Also, for optional software, see Section 5.

Toll Free 1-800-888-8888

Data Acquisition and Control Boards / Digital



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com