

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PRV-0509

DATASHEET


Dual Ball-Bearing Fans on PC/104 Form Factor

FEATURES

Fans:
- Two Ball-Bearing Fans (with Noise Suppression Circuitry); Adjustable Air Flow Direction

Protection:
- Overcurrent Protection

Bi-Directional Airflow:
- Septum Enables Bi-Directional Airflow

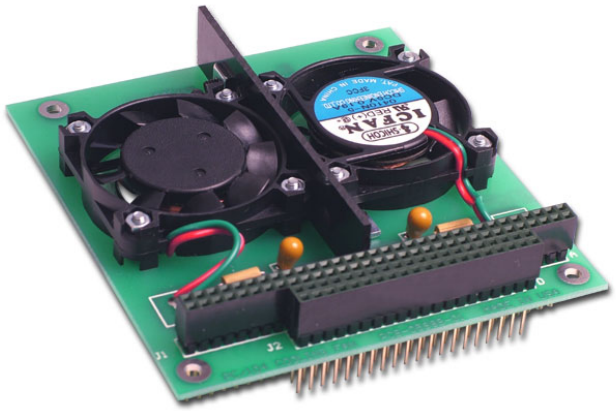

DESCRIPTION

The PC/104 Fan Card from Parvus Corporation is designed to help cool embedded PC/104 systems and remove dangerous hot spots, even in completely enclosed applications. In most cases, it is placed between a CPU and power supply - where thermal management is most needed. With dual fans aimed in opposite directions and a septum in between, this PC/104-compatible module pushes up to 12 cubic feet per minute with airflow moving in a circular pattern around adjacent PC/104 boards. If desired, each of the fans can be reversed (flipped over) to create a push-push or pull-pull movement of air.

The board is built with high quality ball-bearing fans with noise suppression circuitry on the fan power lines. In an enclosed Parvus PC/104 chassis system, this thermal management board will provide cooling for up to four adjoining boards (two on top and bottom), whereas in open air systems, the fan board will cool two PC/104 boards (one on top and bottom).


Note: The PRV-1059 PC/104 Fan Card is compatible for integration with the Cisco 3200 Series Mobile Access Router. For more info, contact Parvus at 801-483-1533 or sales@parvus.com.

SPECIFICATIONS

Dimensions:	3.550" x 3.775" (PC/104)
Storage Temperature:	-40° to +70° C
Operating Temperature:	-5° to +60° C
Power Consumption:	1.72 Watts (+5 VDC @ 300 mA)
Power Input::	5VDC +/- 5%
Fuses:	0.5 amp, 125 v, Picofuse
PCB Septum Dimensions:	3.2" L x 0.6" H x 0.6" T
Bus:	16-bit PC/104 (ISA) Bus
Fan Specs:	Type: Ball-Bearing, Brushless; Rating: 12 CFM Fans; Fan Noise (at 1 Meter): 25 dB; Fan Speed: 6000 RPM; Life Expectancy: 50,000 hours
RoHS	RoHS (2002/95/CE) Compliant Replacement for PRV-0509-01

Parvus
a Curtiss-Wright Company

Parvus, a Curtiss-Wright Company | www.parvus.com
3222 Washington Street | Salt Lake City, UT 84115 - USA
office: 800.483.3152 | fax: 801.801.483.1523 | email: sales@parvus.com

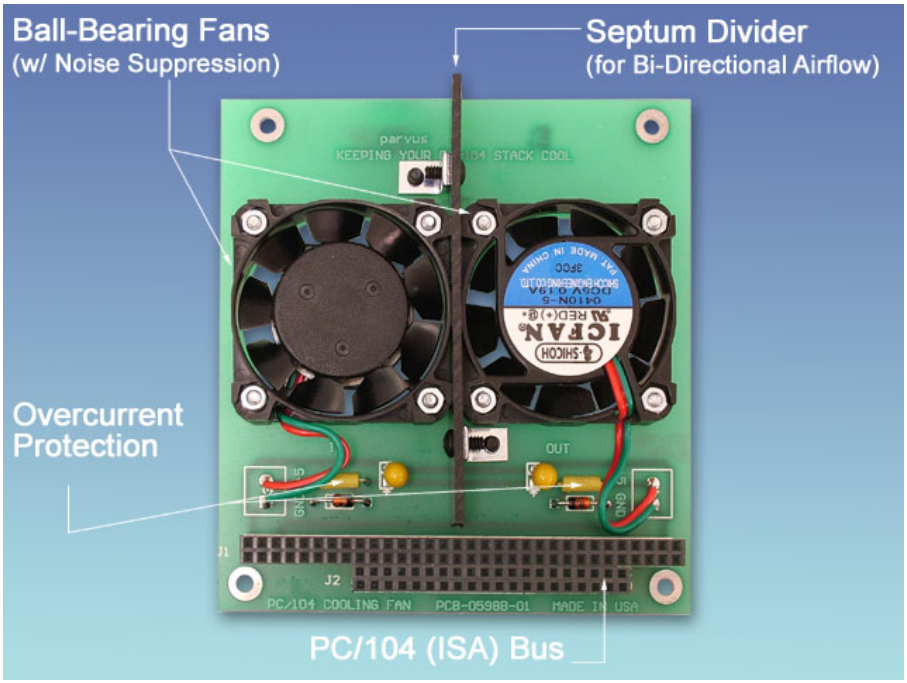

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
PRV-0509-14	PC/104 Fan Card I

Parvus, a Curtiss-Wright Company | www.parvus.com
3222 Washington Street | Salt Lake City, UT 84115 - USA
office: 800.483.3152 | fax: 801.801.483.1523 | email: sales@parvus.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP