ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments BNC-2810* at our website: *Click HERE*

INSTALLATION GUIDE

INSTALLING YOUR BNC-2810 SDA CONNECTOR BLOCK

This installation guide describes how to connect a BNC-2810 to your PCI/PXI-6810 serial data analyzer (SDA) and shows the BNC-2810 channel and signal connections.

Introduction

The BNC-2810 is a connector block designed for use with a PCI/PXI-6810 serial data analyzer. You can use the BNC-2810 on a desktop or optionally mount it on a Deutsche Industrie Norme (DIN) rail that conforms to the Comité Européen de Normalisation Electrotechnique (CENELEC) 35 mm standard. The BNC-2810 provides easy access to the following channels and signals:

- RS-232 channels 0 and 1
- RS-485 channels 0 and 1
- Programmable channels 0, 1, and clock
- Input and output triggers
- Digital input/output (I/O) lines 0 through 7
- Output enable signals 0 and 1
- External power supply

Refer to *Getting Started with Your PCI/PXI-6810 Serial Data Analyzer* for more detailed information regarding these channels and signals.

The Software is the Instrument™ is a trademark of National Instruments Corporation. Product and company names are trademarks or trade names of their respective companies.

321845A-01 *© Copyright 1998 National Instruments Corp. All rights reserved.* *January 1998*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

What You Need to Get Started

You need the following to set up and use your BNC-2810:


- ❑ *Installing Your BNC-2810 SDA Connector Block* installation guide
- ❑ Your computer or PXI chassis
- ❑ One of the following devices:
  - PCI-6810 serial data analyzer
  - PXI-6810 serial data analyzer
- ❑ BNC-2810 SDA connector block
- ❑ SH6868-D1 shielded cable
- ❑ DIN rail mounting hardware (optional)

Typical Connection

Figure 1 shows a typical connection of the BNC-2810 connector block to a PCI/PXI-6810 serial data analyzer. Use the following steps to install your BNC-2810:

1. Insert one end of the SH6868-D1 shielded cable into the 68-pin connector on your BNC-2810 connector block.
2. Insert the other end of the SH6868-D1 shielded cable into the 68-pin connector on your PCI/PXI-6810 serial data analyzer.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

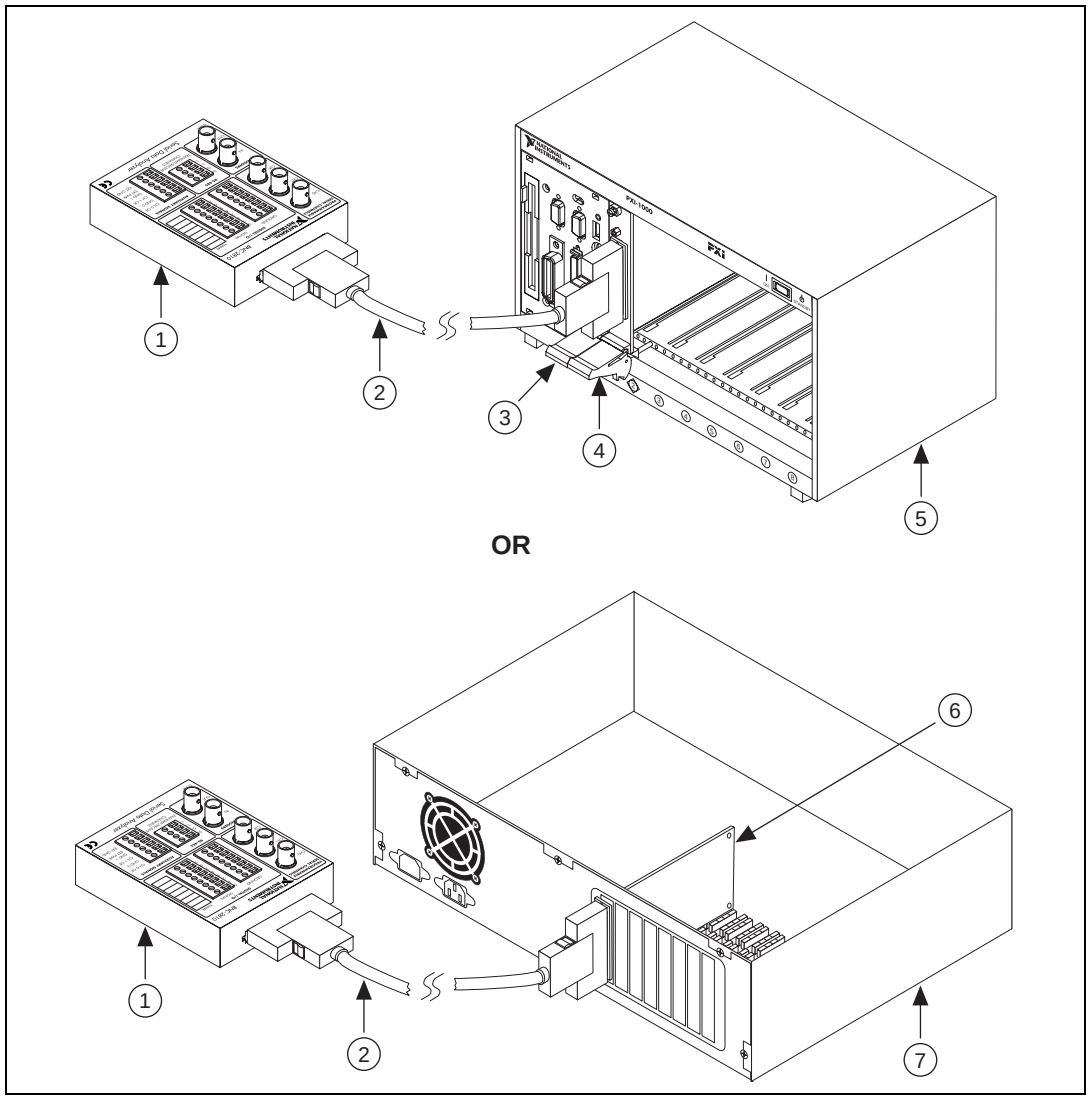

1	BNC-2810 SDA Connector Block	4	PXI-6810 Serial Data Analyzer	6	PCI-6810 Serial Data Analyzer
2	SH6868-D1 Shielded Cable	5	PXI Chassis	7	Personal Computer
3	PXI Controller				

Figure 1. Typical BNC-2810 to PCI/PXI-6810 Connection

You can now connect to the channels and signals of your PCI/PXI-6810 serial data analyzer.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Signal Connections

Figure 2 shows the BNC-2810 channel and signal connections.

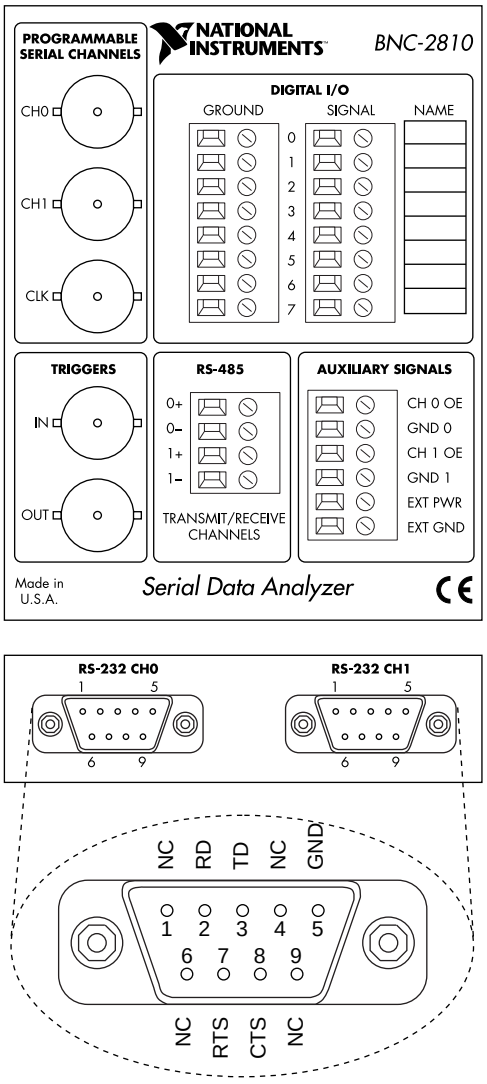


Figure 2. BNC-2810 Signal Connections

Refer to your *Getting Started with the PCI/PXI-6810 Serial Data Analyzer* for signal connections to the 68-pin connector.

321845A-01 Jan98

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP