

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Spanawave / Giga-tronics / Ascor 8901* at our website: *Click HERE*

Model GT-8900

Microwave Switching Chassis

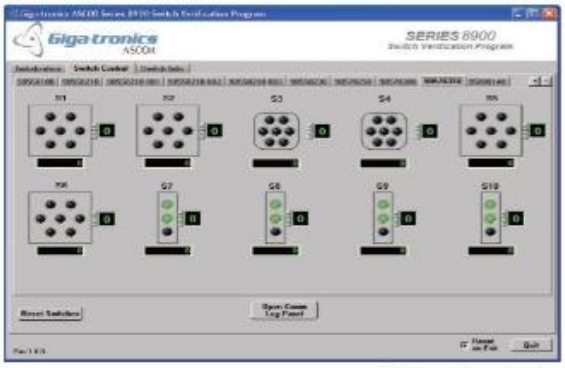

Model 8902 switch control sample

GIGA-TRONICS POINT-TO-POINT SOFTWARE

- Just point and click and the software closes the appropriate relays
- Relay closure counter for preventative maintenance
- Path storage and recall to simplify test development
- Manual control with position indicator lights for troubleshooting

Specifications

- **Electrical**
  - 90-250 VAC input
  - 47-63 Hz
  - 40 Control Channel Standard
- **Indicators**
  - Power
  - Relay Position Status
  - Error
- **Environmental**

Temperature
- Operating 0° to 50°C
- Storage -40° to 75°C

Humidity (non-condensing)
- Operating 10 to 90%
- Storage 0 to 95%

EMC
- EU Directive 2004/108/EC

Safety
- EU Directive 2006/95/EC

Mechanical
- 8901 = 3.5"h x 8.5"w x 14"d
- 8902 = 3.5"h x 17"w x 14"d

Rackmount Kits (Optional)
- Standard = 78009560
- Extended = 89802108

Configuration Guides

Chassis 8901 / 8902 — **Interface** G = GPIB, L = Ethernet — **Type 1** — **Type 2** — **Type #** (as needed, same order as front panel)

Qty

Form code see chart below

Termination T=Term, S=un-term

Reliability P=10M, R=2-5M

Frequency 03=3GHz, 06=6GHz, 18=18GHz, 26=26.5GHz, 40=40GHz

Form	1x2	1x3	1x4	1x4 Mini	1x5	1x6	1x6 Min	1x7	1x8	1x9	1x10	1x11	1x12	Transfer
Form Code	2	3	4	4M	5	6	6M	7	8	9	10	11	12	TX
Width (8" or 17" max)	0.6	2.25	2.25	1.4	2.25	2.25	1.4	2.25	2.25	2.5	2.5	2.7	2.7	1.3

(please sum up the widths to ensure the relays will fit in the selected enclosure)

Examples



8902-L-26TP18-26MSP18-26TP18-42SP18



8901-G-26TP26

www.gigatronics.com | inquiries@gigatronics.com
800.726.4442 (USA) | +1 925.328.4650 (International)

Giga-tronics ASCOR

©2013 Giga-tronics Incorporated. All Rights Reserved. All trademarks are the property of their respective owners. | Item# 35153

MADE IN USA

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP