



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation


Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



Embedded products you can count on!

XVME-979X Mass Storage System

Now available with DVD/CD R/W drive

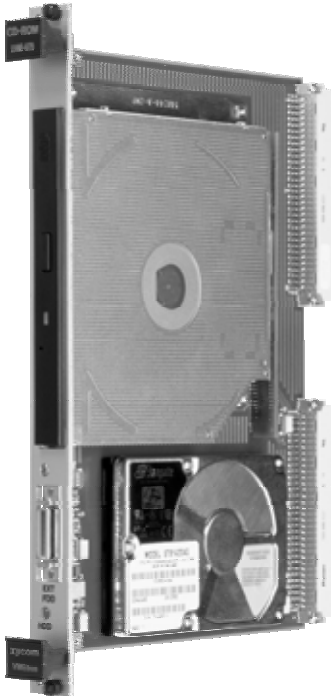

FEATURES

- 24XCD-ROM drive or CD-R/W drive, 24XCD-ROM/DVD drive or CD/DVD-R/W drive, EIDE/Atapi interface, 16.6MB/sec(PIO Mode 4/DMA Mode 2) transfer rate is standard, 33.3MB/sec capable
- Multi-session PhotoCD ", CDI, Video CD, Enhanced CD, and CDPlus compatible
- Occupies only one VMEbus slot
- Automatic retries on errors
- Transparent defect mapping reassigns defective sectors discovered in the field without reformatting (/2and /4 versions only)
- Easily removable cabling in the backplane
- Available in four versions:
 - CD-ROM drive/external floppy connector version (XVME-979X/1)
 - CD-ROM, harddrive, and external floppy connector version (XVME-979X/2)
 - CD-R/W drive/external floppy connector version (XVME-979X/3)
 - CD-R/W, harddrive, and external floppy connector version (XVME-979X/4)
 - CD/DVD R/W, harddrive, and external floppy connector version (XVME-979X/5)

OVERVIEW

The XVME-979X CD-ROM or CD-R/W or DVD R/W, harddrive, and external floppy drive module provides an easy way to integrate these storage devices on the VMEbus while occupying only one double-high (6U) VMEbus slot. It is available in four versions.

The XVME-979X/2 contains a 5.25" 24X CD-ROM drive and the XVME-979X/4 contains a 5.25" 24X CD-R/W drive. Both models include a 2.5" hard drive, and an external floppy drive connector for an optional, removable, external floppy drive (XVME-9000-EXF). The XVME-979X easily plugs into the VMEbus backplane, with the DVD or CD-ROM/CD-R/W drive, EIDE hard drive, and floppy drive signals routed through the VMEbus P2 connector. A separate cable connects these signals to the processor board. The XVME-979X/1 and XMVE-979X/3 do not include the hard drive but do include a three position P2 interconnect cable to allow connection to an XVME-977X.

The external floppy drive (9000-EXF) can be disconnected when not in use or to limit floppy access to the system. The XVME-9000-EXF cannot be used in conjunction with the XVME-977X.

The XVME-979X is ideally suited for use with XycomVME's VMEbus PC/AT processor modules. The compact design and easy installation make it an ideal mass storage solution for a variety of VMEbus systems.

PRODUCT SPECIFICATIONS AND RATINGS

Hardware

Dimensions Form factor: DOUBLE (6U) 9.2" x 6.3" (233 mm x 160 mm)

CD-ROM & CD-R/W Drives

Interface ATAPI/IDE

Type 5.25"

Data Transfer Rate 16.6 MB/sec standard, 33.3 MB/sec max 1,548 to 3,600 KB/sec (full cav) sustained

Hard Drive

Interface IDE **Type** 2.5"

Data Transfer Rate 16.6 MB/sec burst (PIO Mode 4 and DMA Mode 2)

Seek Times Average Access: 12 msec, Track to Track: 4 msec

Product Models

XVME-979X/1 CD-ROM and External Floppy Connector

XVME-979/2 CD-ROM, Standard Hard Drive (contact XycomVME for current details), External Floppy Connector.
NOTE: The XVME-979/2 cannot be used with the XVME-977

XVME-979/3 CD-R/W and External Floppy Connector

XVME-979/4 CD-R/W, Standard Hard Drive (contact Xycom for current details), External Floppy Connector.
NOTE: The XVME-979/4 cannot be used with the XVME-977

Optional Floppy Drive - XVME-9000-EXF

Interface Front Panel Connector on XVME-979/1 and 979/2

Type 3.5", 1.44 MB

Compatibility The XVME-9000-EXF cannot be used with the XVME-977

Power Supply

Hard Drive +5 V, 1.2 A max. (spin-up peak), 0.4 A typical

Floppy Drive +5 V, 0.74 A max. (Spin-up peak), 0.4 A typical

CD-ROM Drive +5 V, 800 mA max. Standby Mode: 20 mA Access Mode: 700 mA

CD-R/W Drive +5 V, 950 mA max. Standby Mode: 70 mA Access Mode: 700 mA

The XVME-979 draws its power and its ground reference from the VMEbus P1 connector. Controller signals are taken from the P2 connector.

Environmental

	Operating	Nonoperating
Temperature	5°C to 50°C (41°F to 122°F)	-40°C to 65°C (-40°F to 149°F) transportation/packaged
Humidity	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
Altitude	Sea level to 10,000 ft. (3,048 m)	Sea level to 40,000 ft. (12,192 m)
Vibration	0.2 g, 5 to 400 Hz	2 g, 5 to 400 Hz
Shock	5 g peak or less (half sine wave 11 msec) duration	50 g peak or less (half sine wave 11 msec) duration 200 g peak or less (half sine wave 2 msec) duration

ORDERING INFORMATION

Order Number	Description
XVME-979/1	CD-ROM Drive, External Floppy Connector
XVME-979/2	CD-ROM Drive, Hard Drive, External Floppy Connector
XVME-979/3	CD-R/W Drive, External Floppy Connector
XVME-979/4	CD-R/W Drive, Hard Drive, External Floppy Connector
XVME-979/5	CD/DVD R/W Drive, Hard Drive, External Floppy Connector
XVME-9000-EXF	External Floppy Assembly for use with XVME-979/1 and 979/2 (XycomVME Part Number 116074-001)

Warranty Information

The XVME-979 carries a one-year parts and labor warranty.

XycomVME, Inc.
710 N. Maple Rd.
Saline, MI 48176
Ph. 734.944.1942
Fax. 734.944.1999

XycomVME, Inc. a company of the



©2005 XycomVME, Inc. All rights reserved. Printed in USA.
All brand or product names are the property of their respective owners.
Specifications may change without notice.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com