



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗


WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

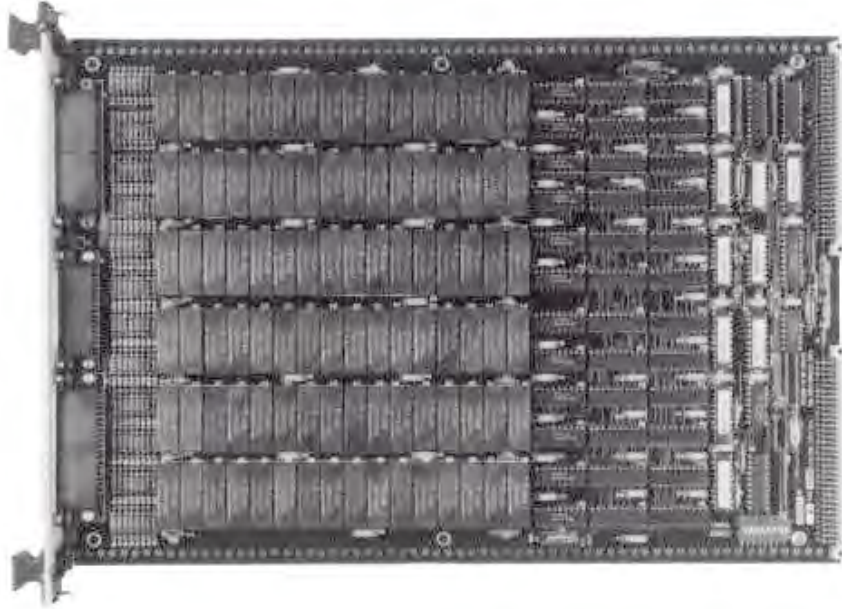

VX416C 96 Channel Switching Module

The VX416C is a C size, Register based switching card that provides 96 channels of 2A, Mercury wetted, Form-A switching. User connection to the module is through two (2) AMP HD-22 78 position and on (1) AMP HD-22 44 position receptacle type connectors. MODID and Board Select indicators are included. Module is equipped with BIT capability and shielding.

Specifications:

Maximum Input Voltage:

Terminal to Terminal:
250 Vdc or ac_{rms}
Terminal to Chassis:
250 Vdc or ac_{rms}

Maximum Switchable Voltage:

250 Vdc, or ac_{rms}

Maximum Switchable Current: (DC or AC_{rms}):

Per Contact: 2A
Per Module: 25A

Maximum Switchable Power:

Per Channel: 50W
Per Module: 625W

Closed Channel Resistance:

>100 mA: <0.085 Ω
(relay plus connector)

Insulation Resistance (between any two points):

>5 x 10⁹ Ω

Relay Life (operations):

Low Level 10⁹
Rated load 5 x 10⁷

Relay Operate Time:

1.5 msec close (typical)
1 ms open (typical)

Power Up/Down States:

Contact is open.

Power: +5V @ 1.5A typical
+12V @ 0.5A typical

Ordering Information:

Description	Part Number
VX416C	11027575-0001

VXIbus Compliance

Complies with ANSI/IEEE Std. 1014-1987 and VXIbus Rev 1.4

A16:D16 DTB Slave

No SYSFAIL

No Interrupts

IACKIN tied to IACKOUT

BRX tied to BGX

Form Factor: Size C

Built-in test via register feedback

Applications

- Power Switching
- Control
- LF Signal Switching



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com