ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Tecumseh / L'Unite Hermetique AWA9490ZXG* at our website: *Click HERE*

Tecumseh Compressor Company
NORTH AMERICAN COMPRESSOR GROUP

AWA9490ZXG Compressor Data Sheet

Drawing Information			
Housing Diagram	DCAW125	Wiring Diagram	DEAW02
General Information			
Compressor Model	AWA9490ZXG	Oil Charge (cc)	1141
Bill Of Material	AW616TT-125-A4	Oil Type	POE
Application	COMMERCIAL	Heat Pump (Evap range)	N/A
Evaporating Range	-10F to +45F	Displacement	2.291
Rating Conditions	ARI	BTUH	9300
Rating Point	+20F	Horse Power	1
Refrigerant	R-404A	Discharge Line Size	0.375
Frequency	60	Suction Line Size	0.625
Electrical Information			
Voltage (60 Hz)	460-60-3	Voltage Range (60 Hz)	414 - 506
Voltage (50 Hz)	380-420-50-3	Voltage Range (50 Hz)	342 - 464
Rating Voltage	460-60-3	RLA	2.4
LRA	25	Motor Type	3PH
Start Capacitor Mfd/Volt	N/R	Run Capacitor Mfd/Volt	N/R
Power	1630	Phase	3
Maximum Continuous Current	6	Energy Efficiency Rating	5.7
Component Information			
Relay Box	NONE	Integral Relay Box	NONE
Capacitor Cabinet Assembly	NONE	Start Capacitor	NONE
Production Run Capacitor	NONE	Crankcase Heater	NONE
Primary Relay	NONE	Primary Vendor Number	NONE
Secondary Relay	NONE	Secondary Vendor Number	NONE
Vendor Over Load	NONE	Fan Over Load	NONE
Terminal Cover	70794	Cover Gasket	30646
Bale Strap	70661	Over Load Spring	NONE
PRV	NONE	LP Kit	N/A
Grommet	70749	Roto Lock Gasket	NONE
Sleeve	70970 OR 71066	Roto Lock Valve	NONE

AWA9490ZXG Compressor Data Sheet

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	460/60/3	Test Voltage	460
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/21/2000
Return Gas	40	Liquid Temp	N/A

Performance Information

Evap Temp		Condensing Temperature						
		90	95	100	110	120	130	140
0	BTUH	8321	7751	7182	6043	4906	3769	2635
	WATTS	1263	1250	12737	1211	1184	1156	1127
	AMPS	2	1.99	1.97	1.94	1.91	1.88	1.84
	LB/HR	157.9	151	144.1	130.3	116.3	102.3	88.2
5	BTUH	9830	9173	8518	7208	5902	4599	3299
	WATTS	1339	1330	1320	1301	1280	1257	1233
	AMPS	2.08	2.07	2.06	2.04	2.02	2	1.97
	LB/HR	184.6	177.2	169.8	155.1	140.2	125.2	110.1
10	BTUH	11412	10665	9919	8430	6946	5467	3994
	WATTS	1425	1421	1415	1404	1391	1376	1359
	AMPS	2.16	2.16	2.16	2.15	2.14	2.13	2.12
	LB/HR	214.6	206.8	199	183.2	167.4	151.5	135.5
15	BTUH	13097	12255	11415	9738	8069	6406	4750
	WATTS	1513	1514	1514	1513	1510	1505	1498
	AMPS	2.25	2.25	2.26	2.26	2.27	2.27	2.27
	LB/HR	248	239.7	231.4	214.8	198	181.2	164.3
20	BTUH	14917	13976	13037	11164	9300	7445	5598
	WATTS	1595	1602	1609	1621	1630	1637	1641
	AMPS	2.33	2.34	2.36	2.38	2.4	2.42	2.44
	LB/HR	284.8	276	267.2	249.6	231.9	214.2	196.3
25	BTUH	16902	15857	14814	12737	10670	8614	6568
	WATTS	1662	1677	1692	1718	1742	1762	1780
	AMPS	2.4	2.42	2.44	2.49	2.52	2.56	2.59
	LB/HR	324.8	315.6	306.3	287.8	269.2	250.5	231.7
30	BTUH	19081	17928	16779	14488	12210	9944	7691
	WATTS	1708	1732	1755	1798	1838	1875	1908
	AMPS	2.46	2.49	2.52	2.58	2.64	2.69	2.74
	LB/HR	368.1	358.4	348.7	329.2	309.7	290.1	270.4

AWA9490ZXG Compressor Data Sheet

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	460/60/3	Test Voltage	460
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/21/2000
Return Gas	65	Liquid Temp	N/A

Performance Information

Evap Temp		Condensing Temperature						
		90	95	100	110	120	130	140
20	BTUH	16395	15395	14392	12400	10427	8480	6567
	WATTS	1594	1600	1605	1615	1624	1633	1641
	AMPS	2.33	2.34	2.35	2.37	2.4	2.42	2.44
	LB/HR	284.3	274.5	264.7	245.4	226.5	208.2	190.6
25	BTUH	18492	17397	16300	14102	11905	9717	7545
	WATTS	1661	1673	1685	1709	1733	1756	1780
	AMPS	2.38	2.4	2.42	2.45	2.49	2.53	2.56
	LB/HR	319	309.3	299.6	279.9	260.3	240.8	221.6
30	BTUH	20677	19505	18325	15951	13560	11160	8760
	WATTS	1717	1736	1754	1792	1829	1867	1905
	AMPS	2.42	2.45	2.48	2.53	2.58	2.63	2.69
	LB/HR	357	347.8	338.5	319.3	299.7	279.7	259.7
35	BTUH	22902	21667	20421	17899	15344	12763	10163
	WATTS	1765	1789	1814	1865	1915	1967	2018
	AMPS	2.47	2.5	2.54	2.61	2.67	2.74	2.81
	LB/HR	397.2	388.9	380.3	362.4	343.5	323.9	303.7
40	BTUH	25121	23838	22539	19900	17210	14477	11708
	WATTS	1804	1835	1866	1928	1992	2056	2121
	AMPS	2.5	2.54	2.59	2.68	2.76	2.84	2.93
	LB/HR	438.3	431.3	423.8	407.8	390.5	372	352.4
45	BTUH	27286	25970	24634	21908	19113	16257	13349
	WATTS	1837	1873	1910	1984	2059	2136	2213
	AMPS	2.52	2.58	2.63	2.74	2.84	2.94	3.04
	LB/HR	479.2	473.8	467.8	454.6	439.5	422.8	404.7
50	BTUH	29351	28017	26659	23874	21004	18056	15037
	WATTS	1864	1906	1947	2032	2119	2207	2297
	AMPS	2.54	2.6	2.67	2.79	2.92	3.04	3.15
	LB/HR	518.5	515.1	511.1	501.3	489.3	475.2	459.2

AWA9490ZXG Compressor Data Sheet

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	380/420/50/3	Test Voltage	380
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/17/2000
Return Gas	40	Liquid Temp	N/A

Performance Information

Evap Temp		Condensing Temperature						
		90	95	100	110	120	130	140
0	BTUH	7042	6552	6062	5082	4101	3121	2141
	WATTS	1023	1010	997	971	943	916	887
	AMPS	1.98	1.96	1.94	1.91	1.88	1.84	1.81
	LB/HR	129	123.7	118.4	107.6	96.7	85.6	74.3
5	BTUH	8561	7982	7404	6250	5097	3947	2799
	WATTS	1094	1086	1077	1059	1039	1019	998
	AMPS	2.05	2.04	2.03	2.01	1.98	1.96	1.94
	LB/HR	159	152.7	146.5	133.9	121.2	108.4	95.4
10	BTUH	10074	9402	8731	7392	6057	4727	3401
	WATTS	1167	1163	1158	1149	1139	1127	1115
	AMPS	2.13	2.13	2.12	2.11	2.1	2.09	2.08
	LB/HR	189.4	182.2	175	160.5	145.9	131.2	116.4
15	BTUH	11615	10845	10076	8543	7016	5496	3983
	WATTS	1236	1237	1238	1239	1238	1237	1233
	AMPS	2.22	2.22	2.22	2.22	2.22	2.22	2.22
	LB/HR	220.8	212.6	204.3	187.7	171.1	154.4	137.6
20	BTUH	13221	12347	11475	9738	8009	6290	4579
	WATTS	1297	1304	1311	1323	1334	1343	1350
	AMPS	2.3	2.31	2.32	2.33	2.35	2.36	2.37
	LB/HR	253.7	244.3	234.9	216.1	197.2	178.4	159.5
25	BTUH	14924	13942	12962	11011	9071	7141	5223
	WATTS	1348	1361	1374	1399	1421	1442	1461
	AMPS	2.38	2.4	2.41	2.44	2.47	2.5	2.53
	LB/HR	288.4	277.8	267.2	246	224.9	203.8	182.6
30	BTUH	16760	15665	14573	12398	10235	8086	5951
	WATTS	1384	1404	1424	1461	1497	1530	1562
	AMPS	2.46	2.48	2.5	2.55	2.59	2.63	2.68
	LB/HR	325.5	313.6	301.7	278.1	254.4	230.9	207.3

AWA9490ZXG Compressor Data Sheet

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	380/420/50/3	Test Voltage	380
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/17/2000
Return Gas	65	Liquid Temp	N/A

Performance Information

Evap Temp		Condensing Temperature						
		90	95	100	110	120	130	140
20	BTUH	13404	12639	11871	10317	8730	7101	5417
	WATTS	1221	1240	1259	1296	1331	1363	1391
	AMPS	2.26	2.28	2.29	2.32	2.35	2.38	2.41
	LB/HR	230.3	223.9	217.5	204.3	190.7	176.5	161.4
25	BTUH	15436	14571	13707	11981	10248	8495	6713
	WATTS	1268	1291	1314	1360	1404	1448	1489
	AMPS	2.32	2.34	2.36	2.41	2.46	2.5	2.54
	LB/HR	265.5	258.7	251.9	238.3	224.6	210.6	196.2
30	BTUH	17536	16548	15568	13628	11705	9787	7864
	WATTS	1316	1342	1368	1420	1473	1526	1577
	AMPS	2.38	2.41	2.44	2.5	2.56	2.62	2.68
	LB/HR	303.1	295.6	288.2	273.6	259.2	244.9	230.5
35	BTUH	19772	18640	17523	15326	13170	11044	8938
	WATTS	1368	1395	1423	1481	1540	1600	1660
	AMPS	2.45	2.49	2.52	2.6	2.68	2.75	2.83
	LB/HR	344.2	335.6	327.3	311.1	295.5	280.2	265.2
40	BTUH	22214	20917	19641	17144	14713	12337	10005
	WATTS	1426	1455	1484	1544	1608	1673	1740
	AMPS	2.53	2.57	2.62	2.71	2.8	2.89	2.98
	LB/HR	389.6	379.7	370.2	351.8	334.3	317.6	301.4
45	BTUH	24931	23448	21991	19153	16405	13735	11134
	WATTS	1495	1523	1553	1614	1680	1748	1820
	AMPS	2.62	2.67	2.72	2.82	2.93	3.03	3.13
50	LB/HR	440.3	428.9	417.8	396.6	376.7	357.8	339.9
	BTUH	27993	26302	24644	21421	18312	15308	12395
	WATTS	1578	1605	1633	1694	1759	1829	1903
	AMPS	2.71	2.77	2.83	2.95	3.06	3.18	3.3
	LB/HR	497.3	484	471.1	446.6	423.6	402.1	381.8

AWA9490ZXG Compressor Data Sheet

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	460/60/3	Test Voltage	460
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/21/2000
Return Gas	40	Liquid Temp	N/A

Coefficient Information

Coefficient	Capacity	Power	Current	Mass Flow
C1	1.856405E+04	1.485435E+03	2.266948E+00	2.805144E+02
C2	6.160206E+02	-2.378206E-01	-8.348619E-03	6.717322E+00
C3	-1.132797E+02	-2.610897E+00	-3.034350E-03	-1.363962E+00
C4	2.387446+00	-3.220221E-02	3.635204E-06	6.845047E-02
C5	-3.717364E+00	1.947606E-01	2.729698E-04	-1.952736E-02
C6	-1.005936E-02	3.531193E-03	3.391938E-03	1.851557E-04
C7	4.049813E-02	-1.046935E-02	-8.121762E-06	-4.543079E-05
C8	-1.696838E-02	4.216550E-03	3.140419E-06	1.684698E-06
C9	1.844254E-03	-4.247799E-04	-2.925399E-07	3.590334E-06
C10	4.629714E-05	-2.260851E-05	-2.476466E-08	-1.833072E-06

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	460/60/3	Test Voltage	460
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/21/2000
Return Gas	65	Liquid Temp	N/A

Coefficient Information

Coefficient	Capacity	Power	Current	Mass Flow
C1	2.080031E+04	1.613779E+03	2.462161E+00	3.758358E+02
C2	6.503375E+02	-1.875654E+00	-1.506959E-02	2.919809E+00
C3	-1.355507E-02	-4.186451E+00	-4.227397E-03	-2.266244E+00
C4	1.077110E+00	-1.813972E-01	-9.684211E-05	5.054564E-02
C5	-3.157213E+00	2.598288E-01	3.248552E-04	1.797167E-02
C6	4.023539E-02	-6.137879E-04	1.717818E-06	1.189463E-03
C7	-6.240988E-02	1.298897E-03	-2.197944E-06	-1.602610E-03
C8	5.940687E-02	-1.246469E-03	2.079329E-06	1.515289E-03
C9	-1.735505E-02	3.670533E-04	-6.036523E-07	-4.398181E-04
C10	1.214644E-03	-2.778250E-05	3.944008E-08	2.922848E-05

AWA9490ZXG Compressor Data Sheet

General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	380/420/50/3	Test Voltage	380
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/17/2000
Return Gas	40	Liquid Temp	N/A

Coefficient Information

Coefficient	Capacity	Power	Current	Mass Flow
C1	1.583293E+04	1.245602E+03	2.273400E+00	2.221581E+02
C2	6.349651E+02	-1.786157E+00	-6.308495E-03	9.448882E+00
C3	-9.719323E+01	-2.564496E+00	-3.355731E-03	-1.035834E+00
C4	9.756513E-01	-9.484443E-02	3.184131E-05	2.700986E-02
C5	-3.844362E+00	1.935391E-01	2.445479E-04	-4.188544E-02
C6	-7.105124E-03	2.693664E-03	5.983669E-07	2.928367E-04
C7	4.624489E-02	-5.177979E-03	-4.459060E-06	6.066488E-04
C8	-1.983929E-02	2.057506E-03	1.855440E-06	-2.863975E-04
C9	2.177546E-03	-2.009933E-04	-1.970201E-07	3.551141E-05
C10	1.971189E-05	-1.920233E-05	-1.549133E-09	-3.134394E-06


General Information

Model	AWA9490ZXG	Refrigerant	R-404A
Voltage	380/420/50/3	Test Voltage	380
Sub Cooling	N/A	Ambient	95
Forced Air	YES	Motor Type	3PH
Run Cap	N/A	Date	1/17/2000
Return Gas	65	Liquid Temp	N/A


Coefficient Information


Coefficient	Capacity	Power	Current	Mass Flow
C1	1.158994E+04	9.157106E+02	2.316618E+00	1.861947E+02
C2	7.458923E+02	-3.056840E+00	-2.172868E-02	6.851833E+00
C3	-5.946899E+01	1.573862E+00	-2.197752E-03	-7.528411E-01
C4	2.063381E+00	5.611563E-02	1.679717E-04	5.962365E-02
C5	-4.740981E+00	1.123541E-01	2.796102E-04	-2.697109E-02
C6	-4.157888E-02	-9.610687E-04	1.797783E-06	-5.248002E-04
C7	9.253708E-02	4.185153E-03	1.007526E-06	1.271548E-03
C8	-8.514681E-02	-3.940336E-03	-1.134412E-06	-1.176411E-03
C9	2.446719E-02	1.160787E-03	3.917748E-07	3.400614E-04
C10	-1.845548E-03	-9.827887E-05	-5.527992E-08	-2.626014E-05

PART NO.
DEAW-2

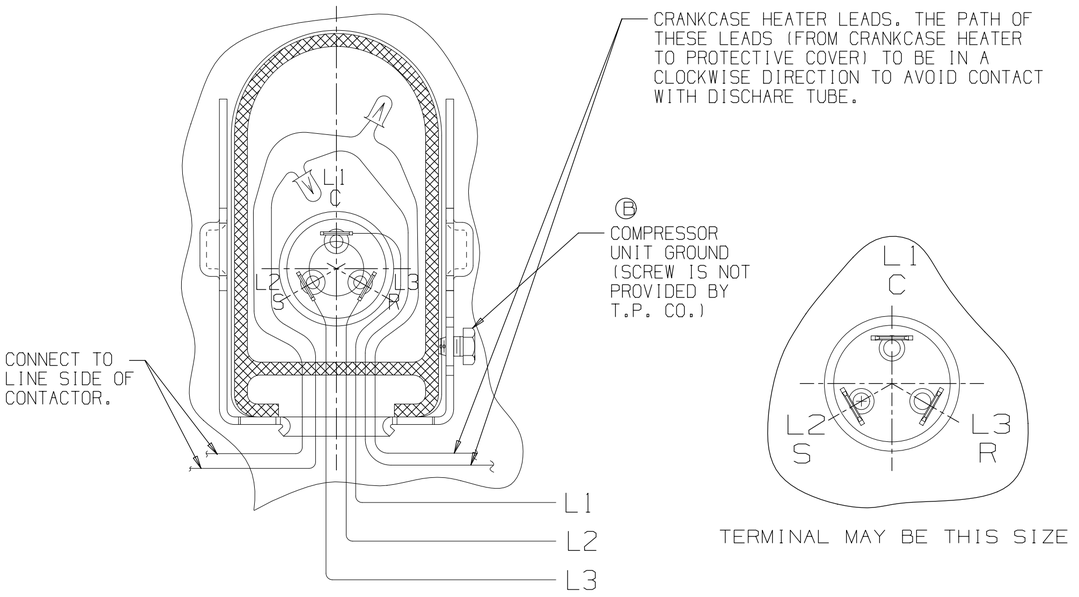



TERMINAL MAY BE THIS SIZE

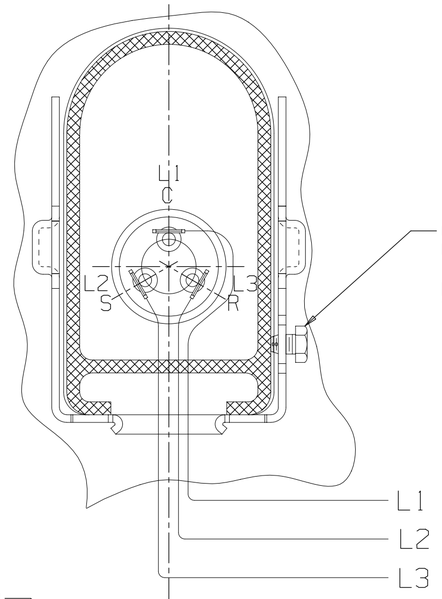




TERMINAL MAY BE THIS SIZE

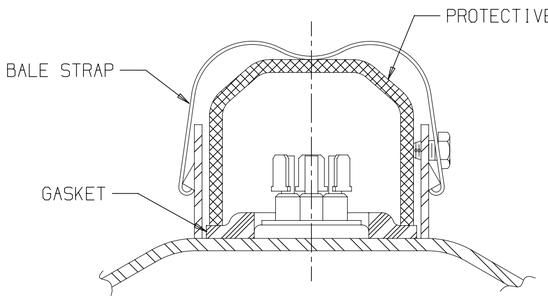


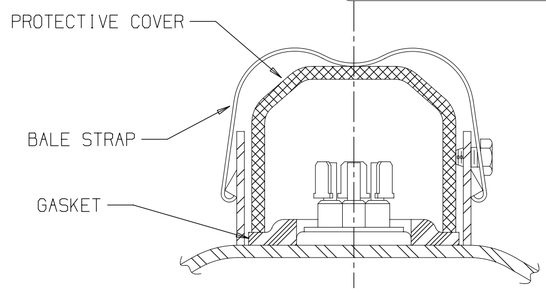


WARNING - WIRING DIAGRAM MUST BE FOLLOWED AS SHOWN. ANY MISWIRING CAN CAUSE SERIOUS ELECTRICAL HAZARD AND POTENTIAL DAMAGE OR RUPTURE OF COMPONENT ELECTRICAL PARTS.

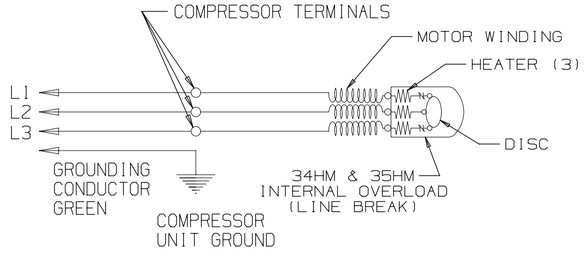


SCHEMATIC WIRING DIAGRAM - 3 PHASE
INTERNAL OVERLOAD (LINE BREAK)
REF DWG MD472-24

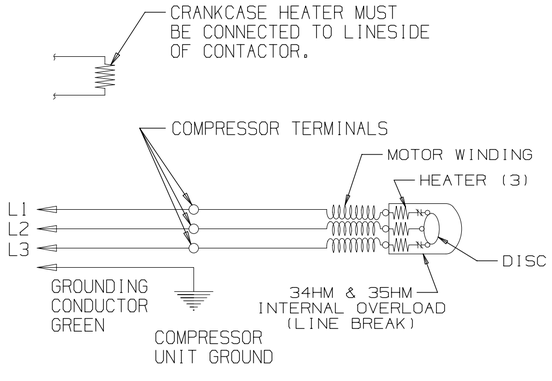

SCHEMATIC WIRING DIAGRAM - 3 PHASE
INTERNAL OVERLOAD AND (LINE BREAK)
REF DWG MD472-43

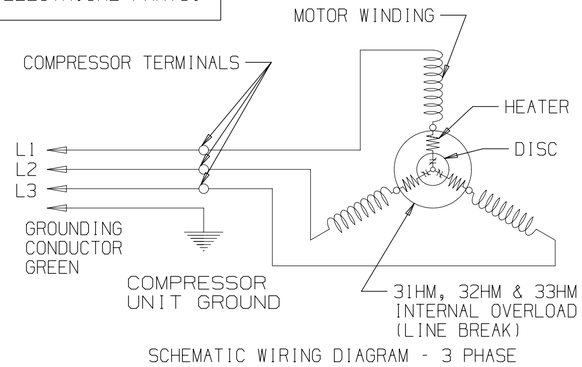

SCHEMATIC WIRING DIAGRAM - 3 PHASE
INTERNAL OVERLOAD (LINE BREAK)
REF DWG MD472-24

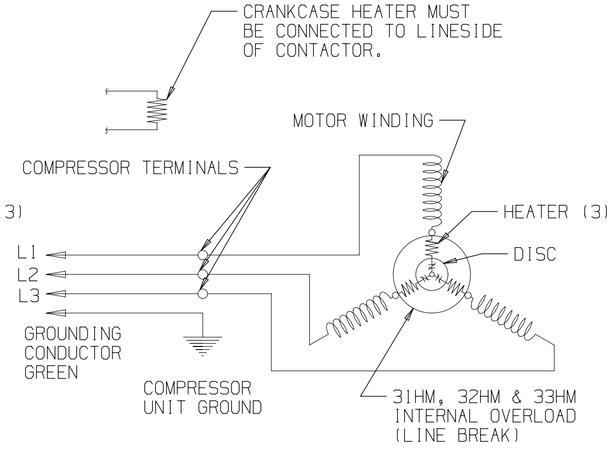

SCHEMATIC WIRING DIAGRAM - 3 PHASE
INTERNAL OVERLOAD (LINE BREAK) AND
CRANKCASE HEATER. REF DWG MD472-43

AW - 3 PHASE - INTERNAL OVERLOAD (LINE BREAK) - CRANKCASE HATER.
AW - 3 PHASE - INTERNAL OVERLOAD (LINE BREAK).
AW

Q.A. SYMBOLS

LT	LC	CHANGE	DATE
C	8B	#242685-000 REVISED WIRING DIAGRAM UPDATED TO NX	T.M.G 5DEC03
	--		
B	2F 5F	#235647 ADDED NOTE	SJS 4/16/97
A	—	#227799 REDRAWN NO CHANGE	—

THIS DRAWING IS THE PROPERTY OF TECUMSEH PRODUCTS COMPANY (TECUMSEH) AND CONTAINS PROPRIETARY INFORMATION BELONGING TO TECUMSEH. INFORMATION HEREIN IS TO BE USED BY RECIPIENT ON THE EXPRESS AND SPECIFIC CONDITION THAT NEITHER IT NOR THE INFORMATION CONTAINED THEREIN SHALL BE REPRODUCED, COPIED, LOANED OR GIVEN TO OTHERS WITHOUT THE EXPRESS AND WRITTEN PERMISSION OF TECUMSEH AND THAT ALL SUCH INFORMATION ONLY AS EXPRESSLY AND SPECIFICALLY AUTHORIZED IN WRITING BY TECUMSEH AND NOT OTHERWISE. (II) SHALL BE RETURNED BY THE RECIPIENT TO TECUMSEH WITHOUT DEMAND IMMEDIATELY UPON THE COMPLETION OF THE PURPOSE FOR WHICH IT WAS LOANED OR TO ANY EXTENT WITHOUT SPECIFIC WRITTEN REQUEST AND (IV) SHALL BE DESTROYED BY THE RECIPIENT AT THE LATTER'S REQUEST PROMPTLY AFTER SUCH REQUEST IS MADE.

DRAWING FOR ALL FERROUS MATERIALS MUST NOT BE MAGNETIZED AS RECEIVED AT COMPRESSOR ASSEMBLY.

DIS.CODE

NAME ELECTRICAL HOOK-UP

DWN.	CK.	APR.	SCALE
R.M.D. 6-27-94			1"=1"


THIS PRINT SUPERSEDES ALL PRINTS PRIOR TO

TECUMSEH PRODUCTS CO.
TECUMSEH, MICHIGAN

MATERIAL

PART NO. DEAW-2

PART NO. DCAW125

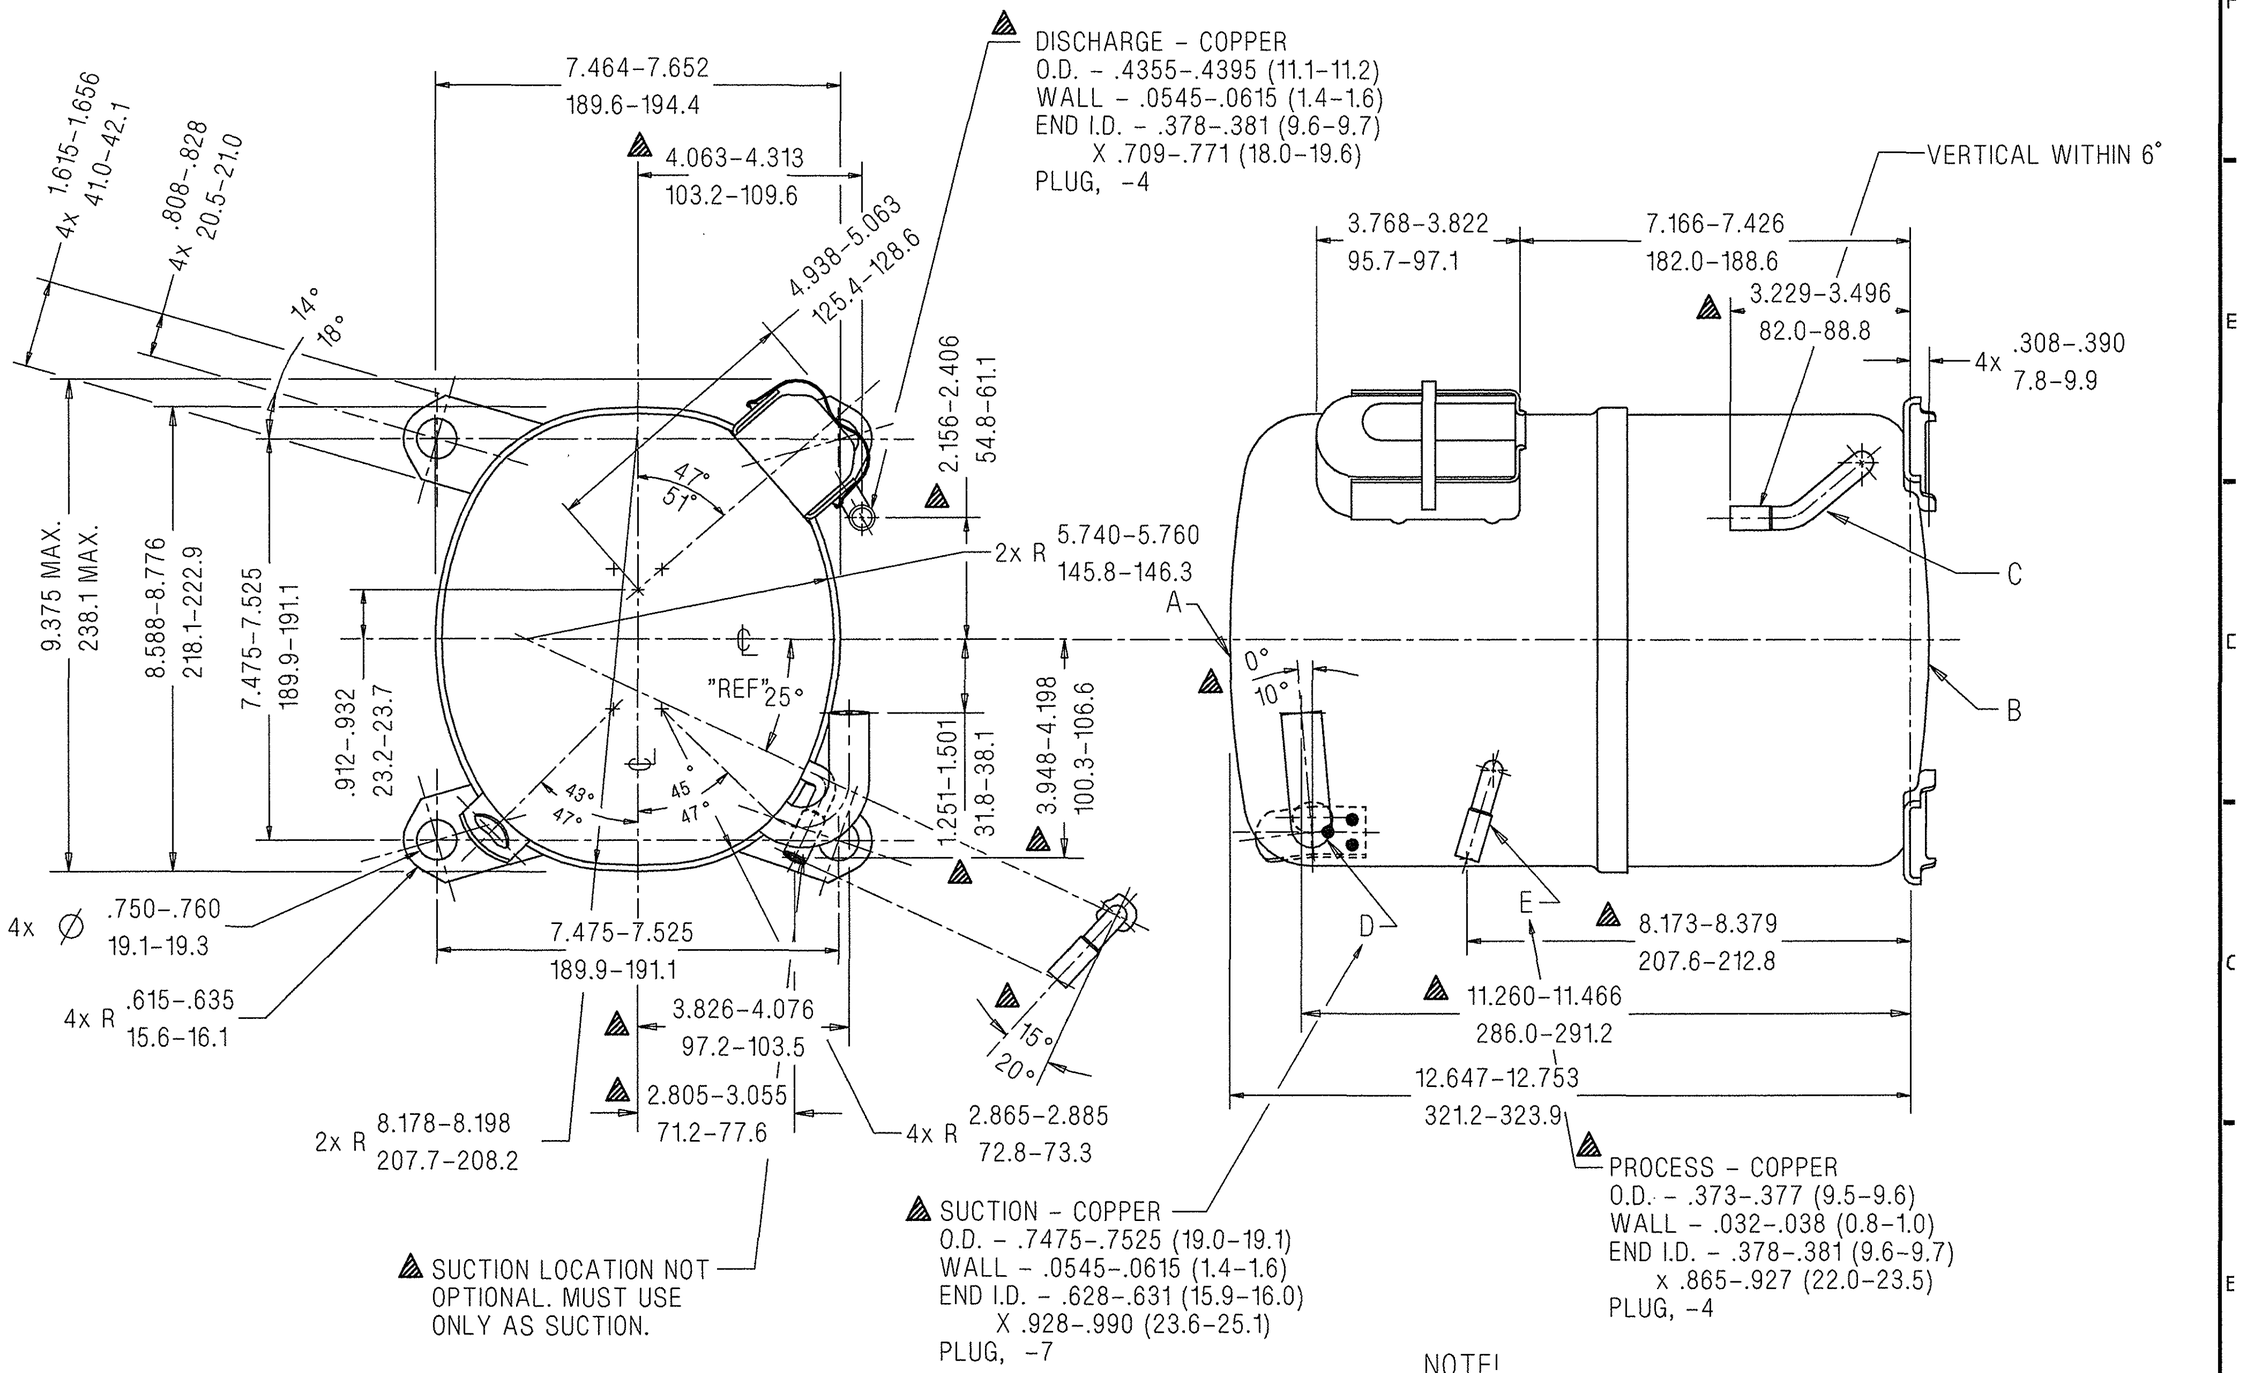

NOTE!

1. IF SPECIFIED ON BILL OF MATERIAL ASSEMBLE THESE PARTS AS SHOWN.

DIMENSIONING = INCHES / MILLIMETERS OR INCHES (MILLIMETERS)

AW

MANUFACTURING NOTES!

1. SEE DWG. #AHT30 FOR ASSY. OF DISCHARGE CONNECTOR & LOWER SHOCK LOOP IN LOWER HOUSING.
2. SEE SPEC. "A-B" & "A-C" FOR PROCESSING.

A	HA642-23
B	HA674-3
C	34711
D	34649
E	34467

Q.A. SYMBOLS
✱ = CATEGORY I
▲ = CATEGORY II
■ = CATEGORY III
= CATEGORY IV

CHANGE #236104-002 DATE
RBL LC LT

THIS DRAWING OR PRINT IS THE PROPERTY OF TECUMSEH PRODUCTS COMPANY (TECUMSEH) AND CONTAINS INFORMATION BELONGING TO TECUMSEH. IT IS NOT TO BE USED, COPIED OR DISCLOSED TO OTHERS FOR ANY PURPOSE WHATSOEVER WITHOUT THE SPECIFIC CONDITION THAT NEITHER IT NOR THE INFORMATION CONTAINED THEREON OR DISCLOSED THEREIN SHALL BE DISCLOSED OR MADE AVAILABLE TO THIRD PARTIES WITHOUT THE SPECIFIC WRITTEN CONSENT OF TECUMSEH AND THEN ONLY AS EXPRESSLY AUTHORIZED IN WRITING BY TECUMSEH. ANY REPRODUCTION MAY NOT BE COPIED OR DUPLICATED IN ANY FORM, WHOLE OR IN PART, EXCEPT AS TECUMSEH'S PRIOR EXPRESS WRITTEN CONSENT AND ANY USE MUST CONTAIN THIS NOTICE. SPECIFIC WRITTEN CONSENT AND LIST OF PERSONS ENTITLED TO USE IT AND THE EXTENT THEREOF TO TECUMSEH AT THE ADDRESS APPEARING ON THE LETTERHEAD. SUCH CONSENT IS MADE.

DO NOT SCALE THIS DRAWING ALL FERROUS MATERIALS MUST BE MAGNETIC AFTER FINAL MACHINING AND ASSEMBLY.

DIS.CODE	34D
NAME	SALES COMPRESSOR
DWN.	T.M.G 10/8/96
CK	Duk 10/23/97
APPR.	10/24/97
SCALE	1"=2"
THIS PRINT SUPERSEDES ALL PRINTS PRIOR TO	
	TECUMSEH PRODUCTS CO. TECUMSEH, MICHIGAN
MATERIAL	NOTED
PART NO.	DCAW125
INTERNAL USE ONLY	UGII\DISK5:[GRIFFITH]AW-DCAW125□REL-C.PRT

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP