

ThorLabs PH2

Ø1/2 Inch Post Holder with Mounting Clamp



Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/83209-11>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.





43 Sparta Avenue
Newton, NJ 07860

Sales: (973) 300-3000

www.thorlabs.com

OPTICAL POSTS: Ø1/2" AND Ø12 MM

- Precision Ground Stainless Steel or Aluminum Posts
- 8-32 (M4) and 1/4"-20 (M6) Threaded or #8 (M4) Counterbored
- Ø1/2" and Ø12 mm Outer Diameter Posts Available
- Vacuum-Compatible and Low-Reflectivity Posts Available

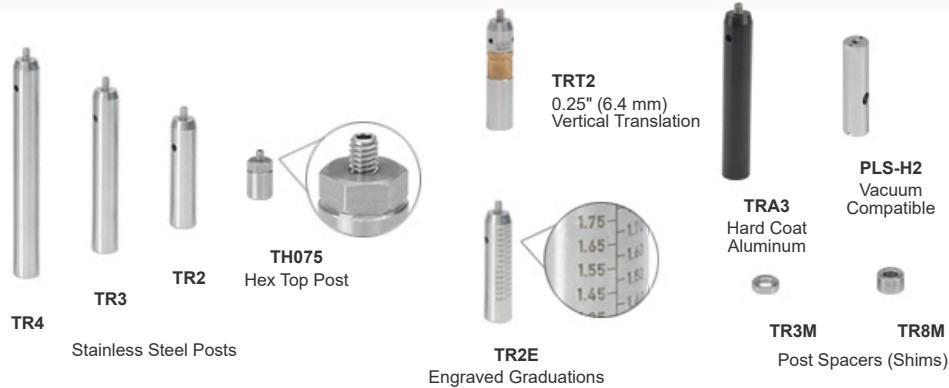

Optical Construction Posts for
Complex Optomechanical
Assemblies

OVERVIEW

Features

- Precision-Ground Posts with 1/2" (12.7 mm) or 12 mm Diameters
 - Options with 8-32 (M4) Removable Setscrew, 8-32 (M4) Tap, or #8 (M4) Counterbores
 - Top Threaded Posts Feature 1/4"-20 (M6) Bottom Thread
 - Ø12 mm Metric Posts for Japanese Optomechanics (See -JP Item Numbers Below)
- Three Material Options Available
 - Standard Posts (303 Stainless Steel)
 - Vacuum-Compatible Posts (303 & 304L Stainless Steel)
 - Non-Magnetic, Low-Reflectivity Posts (Aluminum with Anodized Hard Coat)
- Available in a Variety of Lengths Ranging from 0.60" to 12" (15 mm to 300 mm for Metric Posts)
- Posts Available with Hex Tops Instead of Side-Located Bores
- Graduated Posts Available to Aid in Optic Alignment
- Post Spacers (Shims) to Achieve Intermediate Post Heights
- All Included Setscrews are Double-Ended (Except with Vacuum-Compatible Posts)



Click to Enlarge
Ø1/8" (Ø3.2 mm) Hole for
Extra Leverage During
Tightening

Thorlabs' Ø1/2" and Ø12 mm Optical Posts are a basic building block required in most rigid constructions and come in a wide range of post lengths ranging from 0.60" to 12" (15 mm to 300 mm for metric posts). Our precision-ground stainless steel posts are fabricated from 303 stainless steel (304L for vacuum-compatible posts) and are compatible with our Ø1/2" post holders and construction accessories. Additionally, we offer non-magnetic Ø1/2" aluminum posts that feature a black anodized hard coating to provide a lower reflectivity in the UV and visible spectral ranges, suitable for applications sensitive to magnetic fields or reflections (see the *Anodization Classes* tab for more information).

Along with our standard posts, Thorlabs also manufactures specialty posts for a wide variety of applications. These options include our Ø1/2" posts with hex tops, Ø1/2" graduated posts, Ø1/2" translating optical posts that are ideal for quick, stable height adjustment of a mounted component, and Ø1/2" optical construction posts for mounting in custom configurations.

The posts with top-located setscrews or taps feature a bottom-located 1/4"-20 (M6) tapped hole, providing compatibility with virtually all of our optic mounts. The 8-32 (M4) tapped hole provides additional flexibility by allowing 8-32 (M4) cap screws to be used with our universal mounts. All our posts, except the translating posts and the hex top posts, feature a side-located hole for using a balldriver or the SPW501 Spanner Wrench to provide extra leverage when tightening or loosening components.

Thorlabs offers a line of adapters and accessories that increase the usability of these posts, including electrical isolation adapters and anti-rotation adapters. Also available are Ø12 mm pedestal posts with a bottom-located 4-40 (M3) or a 1/4"-20 (M6) tapped hole and a top-located 4-40 (M3) or 8-32 (M4) removable setscrew. Please see our complete line of Ø1/2" Post Assemblies for other compatible accessories.

Quick Links

Stainless Steel Pillar Posts

Ø1/2" (Ø12.7 mm) Posts: Imperial, Metric

Ø12 mm Posts

Vacuum-Compatible Posts with 8-32 (M4) Setscrew

Vacuum-Compatible Posts with #8 (M4) Counterbores & Alignment Pin Holes

Vacuum-Compatible Posts with 8-32 (M4) Taps & Alignment Pin Holes for Polaris® Mounts

Posts with Hex Tops

Graduated Posts

Translating Posts


Construction Posts

Non-Magnetic, Low-Reflectivity Aluminum Posts

Accessories

Unthreaded Post Spacers

Spanner Wrench



All of these posts, with the exception of the vacuum compatible posts, come with double-ended removable setscrews.

ANODIZATION CLASSES&NBSP;

The anodizing of aluminum is a widely utilized conversion coating technique applied to a wide range of materials and employed in various decorative and engineering applications. In the simplest of terms, anodizing is an electrochemical process that modifies the parent material's surface hardness, reflectivity, lubricity, adhesion, light suppression, and electrical /thermal insulating properties. While the anodizing process can be performed on a variety of electrically conductive materials, it is predominantly used to plate aluminum, thereby improving the component's surface properties.

Within the anodizing process, there are three alternative processes that, while similar, produce slightly different end properties: Type-I (Chromic Acid Anodize), Type-II (Sulfuric Acid Anodize), and Type-III (Hard Anodize). An explanation of each process is provided below. The main purpose of these three processes is to control the oxidation reaction that occurs naturally when raw aluminum is exposed to oxygen in the atmosphere.

The anodizing process starts by mounting the substrate/parts to be anodized onto a conductive rack/jig (usually constructed from titanium or aluminum); these racks are then immersed into an electrolyte solution, which has a composition that is similar to battery acid. A DC power supply is then added to the entire cell/anodizing system; this promotes electrolysis of water within the electrolyte via electron transfer and separation of water molecules, which in turn promotes oxygen evolution at the anode (hence the term anodizing).

This reaction forms a tightly packed hexagonal structured layer on the exposed surfaces of the aluminum components. Once hydrated/sealed (in most cases), the resulting item has improved corrosion resistance and is electrically insulated. The density, thickness, and sometimes color of the resultant anodic film can be precisely controlled through the use of various electrolyte solutions, concentrations, temperatures, and current densities. After this initial conversion coating has taken place, various different chemical species (i.e., PTFE, metallic species, or colored pigments) can be adsorbed / deposited into the oxidized film, which can further enhance the Anodic film's performance or aesthetics.

Type-I Anodization

Type-I (Chromic Acid Anodizing) Oxidation is generally utilized for aerospace applications (soon to be replaced by Tartaric Anodizing) or general bonding applications. The standard film thickness is between 0.5 μm to 18 μm , making it too thin for external use. This type of plating provides a moderate improvement in corrosion resistance and electrical insulation as well as excellent adhesive bonding properties due to the film structure.

Type-II Anodization

Type-II (Sulfuric Acid Anodizing) Oxidation is widely used for architectural and decorative purposes due to its film structure and performance capabilities. Typical film thicknesses can range between 5 μm and 25 μm . The increased film thickness and differences in film structure compared to Type-I provide an increase in the film's abrasion resistance and electrical insulation. Films such as Type I and Type II can be machined post anodizing; however, due to the increase in hardness introduced by the anodic film tool, the lifetime of the cutting tool will be diminished.

Type-III Anodization

Type-III (Hard Anodizing/Hard-Coat) Oxidation is the thickest, densest, and most robust type of anodizing available and is predominantly used exclusively for engineering purposes. It has a typical thickness between 25 μm to 150 μm and is often referred to as 'Hard Anodizing' or 'Hard Coat Anodizing'. The increased thickness and film density produced by this type of anodizing make an extremely hard and very rugged coating with a greatly reduced wear-and-tear characteristic. This Anodic process exhibits all of the benefits offered by Type-II, but provides a lower co-efficient of friction, better corrosion resistance, and maximum surface hardness. However, due to the increased thickness and hardness of this type of anodizing, components anodized in this way cannot be easily machined post processing without specialist tooling.

Most Thorlabs components feature a Type-II matte-black anodized finish to promote light-absorption and provide improved wear resistance, while maintaining the ability to be machined with common tooling. In certain Thorlabs designs, Type-III or "Hard Coat Anodizing" has been chosen to offer maximum surface-hardness and wear resistance due to the requirements presented by the product's intended application, such as our TRA series non-magnetic, low-reflectivity aluminum posts.




[Click to Enlarge Unanodized Aluminum Post Holder](#)



[Click to Enlarge Type-II Anodized Aluminum Post Holder](#)



[Click for Details Type-III Anodized Aluminum Post](#)

Ø1/2" Stainless Steel Optical Posts - Imperial

- One 8-32 Tapped Hole on Top and One 1/4"-20 Tapped Hole at Base
- Removable Double-Ended 8-32 Setscrew
- Available Individually in Lengths Ranging from 0.75" to 12"
- Packs of 5 Also Available for 0.75" to 6" Lengths

These virtually non-magnetic 303 stainless steel (SS) posts are precision ground to Ø1/2". One end has a 1/4"-20 tapped hole, while the other end has a removable SS8E50D double-ended 8-32 setscrew [5/64" (2 mm) hex]. A side-located Ø1/8" (Ø3.2 mm) hole is

bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components. To reduce packaging waste, we offer our most popular sizes in packs of five.

For shorter posts without a side-located bore, see our Ø1/2" (Ø12.7 mm) optical posts with hex tops sold below.

Part Number	Description	Price	Availability
TR075	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 0.75"	\$5.38	Today
TR075-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 0.75", 5 Pack	\$24.22	Today
TR1	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 1"	\$5.38	Today
TR1-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 1", 5 Pack	\$24.22	Today
TR1.5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 1.5"	\$5.65	Today
TR1.5-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 1.5", 5 Pack	\$25.40	Today
TR2	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 2"	\$5.90	Today
TR2-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 2", 5 Pack	\$26.52	Today
TR3	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 3"	\$6.15	Today
TR3-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 3", 5 Pack	\$27.70	Today
TR4	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 4"	\$6.67	Today
TR4-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 4", 5 Pack	\$30.00	Today
TR6	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 6"	\$8.09	Today
TR6-P5	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 6", 5 Pack	\$36.37	Today
TR8	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 8"	\$9.88	Today
TR10	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 10"	\$10.98	Today
TR12	Ø1/2" Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 12"	\$12.80	Today

Ø12.7 mm Stainless Steel Optical Posts - Metric


- One M4 Tapped Hole at Top and One M6 Tapped Hole at Base
- Removable Double-Ended M4 Setscrew
- Available Individually in Lengths Ranging from 20 to 300 mm
- Packs of 5 Also Available for 20 to 150 mm Lengths

These virtually non-magnetic 303 stainless steel (SS) posts are precision ground to Ø12.7 mm. One end has an M6 tapped hole, while the other end has a removable SS4M12D double-ended M4 setscrew [2 mm (5/64") hex]. To easily distinguish these metric posts from their imperial counterparts featured above, the metric posts have a ring-shaped groove in the tapered section of the post. A side-located Ø3.2 mm (Ø1/8") hole is bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components. To reduce packaging waste, we offer our most popular sizes in packs of five.

For shorter posts without a side-located bore, see our Ø1/2" (Ø12.7 mm) optical posts with hex tops sold below.

Part Number	Description	Price	Availability
TR20/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 20 mm	\$5.38	Today
TR20/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 20 mm, 5 Pack	\$24.22	Today
TR30/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 30 mm	\$5.38	Today
TR30/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 30 mm, 5 Pack	\$24.22	Today
TR40/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 40 mm	\$5.65	Today
TR40/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 40 mm, 5 Pack	\$25.40	Today
TR50/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 50 mm	\$5.90	Today
TR50/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 50 mm, 5 Pack	\$26.52	Today
TR75/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 75 mm	\$6.15	Today
TR75/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 75 mm, 5 Pack	\$27.70	Today
TR100/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 100 mm	\$6.67	Today
TR100/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 100 mm, 5 Pack	\$30.00	Today
TR150/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 150 mm	\$8.09	Today
TR150/M-P5	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 150 mm, 5 Pack	\$36.37	Today
TR200/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 200 mm	\$9.88	Today
TR250/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 250 mm	\$10.98	Today
TR300/M	Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 300 mm	\$12.79	Today

Ø12 mm Stainless Steel Optical Posts



- ▶ One M4 Tapped Hole at Top and One M6 Tapped Hole at Base
- ▶ Removable Double-Ended M4 Setscrew
- ▶ Ø12 mm Outer Diameter for Compatibility with Japanese Standard Post Holders and Optomechanics
- ▶ Available Individually in Lengths Ranging from 20 to 300 mm
- ▶ Packs of 5 Also Available for 20 to 100 mm Lengths

These virtually non-magnetic 303 stainless steel (SS) posts are precision ground to Ø12 mm. One end has an M6 tapped hole, while the other end has a removable SS4M12D double-ended M4 setscrew [2 mm (5/64") hex]. To easily distinguish these as metric posts, there is a ring-shaped groove in the tapered section of the post. A side-located Ø3.2 mm (Ø1/8") hole is bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components. To reduce packaging waste, we offer our most popular sizes in packs of five.

These Ø12 mm posts are directly compatible with our standard Ø1/2" Post Holders and most of their compatible products. For components that require a post diameter of 1/2" (12.7 mm), such as our BA2E flexure post mount, we recommend using our AD12BA barrel adapter to bridge the 0.03" (0.7 mm) gap.

Part Number	Description	Price	Availability
TR20/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 20 mm	\$5.38	Today
TR20/M-JP-P5	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 20 mm, 5 Pack	\$24.22	Today
TR30/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 30 mm	\$5.38	Today
TR30/M-JP-P5	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 30 mm, 5 Pack	\$24.22	Today
TR40/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 40 mm	\$5.65	Today
TR40/M-JP-P5	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 40 mm, 5 Pack	\$25.40	Today
TR50/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 50 mm	\$5.90	Today
TR50/M-JP-P5	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 50 mm, 5 Pack	\$26.52	Today
TR75/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 75 mm	\$6.15	Today
TR75/M-JP-P5	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 75 mm, 5 Pack	\$27.70	Today
TR100/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 100 mm	\$6.67	Today
TR100/M-JP-P5	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 100 mm, 5 Pack	\$30.00	Today
TR150/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 150 mm	\$8.09	Today
TR200/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 200 mm	\$9.88	Today
TR250/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 250 mm	\$10.98	Today
TR300/M-JP	Ø12 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 300 mm	\$12.79	Today

Ø1/2" (Ø12.7 mm) Vacuum-Compatible Posts



- ▶ Constructed of 304L (Post) and 316 (Setscrew) Stainless Steel for Vacuum Applications
- ▶ One 8-32 (M4) Tapped Hole on Top and One 1/4"-20 (M6) Tapped Hole at Base
- ▶ Removable 8-32 (M4) Setscrew
- ▶ Available in Lengths Ranging from 0.75" to 3" (20 mm to 75 mm for Metric Posts)

Vacuum Compatibility Specifications	
Vacuum Compatibility as Packaged ^a	>10 ⁻⁶ Torr
Materials	304L Stainless Steel (Post) 316 Stainless Steel (Setscrew)
Preparation and Packaging	Chemically Cleaned and Double Vacuum Bagged

These virtually non-magnetic, vacuum-compatible 304L stainless steel posts are precision ground to Ø1/2" (Ø12.7 mm). One end has a 1/4"-20 (M6) tapped hole, while the other end has a removable 8-32 (M4) threaded setscrew [5/64" (2 mm) hex]. A side-located Ø1/8" (Ø3.2 mm) hole is bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components. The 8-32 (M4) threaded hole is also vented into the side-located Ø1/8" (Ø3.2 mm) hole. We recommend using a vented cap screw in the 1/4"-20 (M6) tapped hole.

- This is the pressure at which these components can be used with no additional processing. They can be used at even lower pressures with additional cleaning and processing.

Vacuum Compatibility

Our vacuum-compatible posts are chemically cleaned and prepared for vacuum applications before packaging. They are compatible directly out of the packaging with vacuum environments down to 10⁻⁶ Torr. With additional cleaning and processing, they can be used at even lower pressures, only limited by the outgassing rate of the stainless steel. The material properties of the 304L and 316 stainless steel and the cleaning methods that are completed by the end user should be used to determine the appropriateness of these products and materials in a specific vacuum system operating at pressures under 10⁻⁶ Torr.


Our vacuum-compatible posts are packaged in double airtight bags for cleanroom and vacuum chamber applications. We also offer additional vacuum-compatible Ø1/2" post system components.

Part Number	Description	Price	Availability
TR20V/M	Ø12.7 mm Vacuum-Compatible Optical Post, M4 Setscrew, M6 Tap, L = 20 mm	\$12.11	Today
TR30V/M	Ø12.7 mm Vacuum-Compatible Optical Post, M4 Setscrew, M6 Tap, L = 30 mm	\$12.79	Today
TR40V/M	Ø12.7 mm Vacuum-Compatible Optical Post, M4 Setscrew, M6 Tap, L = 40 mm	\$15.11	Today
TR50V/M	Ø12.7 mm Vacuum-Compatible Optical Post, M4 Setscrew, M6 Tap, L = 50 mm	\$15.46	Today
TR75V/M	Ø12.7 mm Vacuum-Compatible Optical Post, M4 Setscrew, M6 Tap, L = 75 mm	\$16.07	Today
TR075V	Ø1/2" Vacuum-Compatible Optical Post, 8-32 Setscrew, 1/4"-20 Tap, L = 0.75"	\$12.11	Today
TR1V	Ø1/2" Vacuum-Compatible Optical Post, 8-32 Setscrew, 1/4"-20 Tap, L = 1"	\$12.79	Today
TR1.5V	Ø1/2" Vacuum-Compatible Optical Post, 8-32 Setscrew, 1/4"-20 Tap, L = 1.5"	\$15.11	Today
TR2V	Ø1/2" Vacuum-Compatible Optical Post, 8-32 Setscrew, 1/4"-20 Tap, L = 2"	\$15.46	Today
TR3V	Ø1/2" Vacuum-Compatible Optical Post, 8-32 Setscrew, 1/4"-20 Tap, L = 3"	\$16.07	Today

Ø1/2" (Ø12.7 mm) Posts with #8 (M4) Counterbore & Alignment Pin Holes



- ▶ Compatible with Mounts with Threaded Mounting Holes
- ▶ Counterbore Hole for #8 (M4) Mounting Screw
- ▶ Two Ø2 mm Alignment Pin Holes for Precision Mounting (Dowel Pins Not Included)
- ▶ Vacuum Compatible to 10⁻⁹ Torr at 25 °C with Proper Bake Out*
- ▶ 303 Stainless Steel Heat-Treated to Remove Internal Stresses for Increased System Stability



Click to Enlarge
Top and Bottom Views of Showing
Alignment Pin Holes and Counterbore



Click to Enlarge
These posts are
designed to be
mounted using our
POLARIS-CA5(M) Non-
Bridging Clamping
Arm.

These Ø1/2" (Ø12.7 mm) posts feature a #8 (M4) counterbore hole for compatibility with mounts with threaded mounting holes, such as our KM05(/M) mirror mount. The top of the posts have two Ø2 mm alignment pin holes, which are located on either side of the counterbore hole. Dowel pins are not included. These posts are designed to mount to an optical surface using our POLARIS-CA5(/M) Polaris non-bridging clamping arms for Ø1/2" posts or other comparable optomechanical components.


A Ø6 mm alignment bore is located 20 mm from the base and can be used in combination with our cage rods for the alignment of multiple mounts along a common optical axis or for fine angle tuning. Note that the alignment bore does not go completely through the PLS-HC1 and PLS-HC246/M posts. Instead, these posts contain two bores on opposite sides, within ±0.3°, that are 0.08" (2.0 mm) deep. Given their shorter length, a through bore would interfere with the counterbore and prevent components from being securely attached to the post.

Popular post lengths are available from stock; custom lengths can be requested by contacting Tech Support. Since the counterbore posts require Polaris clamping arms for Ø1/2" posts or other optomechanical components for mounting to an optical surface, the minimum length for custom posts should not be less than the height of the mounting component, which is 0.45" (11.4 mm) for these Polaris clamping arms.

*These posts are assembled in a clean environment, chemically cleaned using the Carpenter AAA passivation method to remove sulfur, iron, and contaminants from the surface, and double vacuum bagged. Prior to placing any components in a sensitive vacuum system, a thorough pre-baking in a bake-out oven should be performed to remove all moisture and surface volatiles. Contact Tech Support for details.

Part Number	Description	Price	Availability
PLS-HC246/M	Ø12.7 mm Post for Threaded Mounts, M4 Counterbore, L = 24.6 mm	\$30.00	Today
PLS-HC373/M	Ø12.7 mm Post for Threaded Mounts, M4 Counterbore, L = 37.3 mm	\$31.00	Today
PLS-HC496/M	Ø12.7 mm Post for Threaded Mounts, M4 Counterbore, L = 49.6 mm	\$32.00	Today
PLS-HC1	Ø1/2" Post for Threaded Mounts, #8 Counterbore, L = 1.00"	\$30.00	Today
PLS-HC15	Ø1/2" Post for Threaded Mounts, #8 Counterbore, L = 1.50"	\$31.00	Today
PLS-HC2	Ø1/2" Post for Threaded Mounts, #8 Counterbore, L = 2.00"	\$32.00	Today

Ø1/2" (Ø12.7 mm) Posts with 8-32 (M4) Mounting Hole & Alignment Pin Holes



- ▶ Designed to Mount Polaris Mounts Up to Ø2"
- ▶ One Top-Located 8-32 (M4 x 0.7) Mounting Hole
- ▶ One Bottom-Located 1/4"-20 (M6 x 1.0) Mounting Hole
- ▶ Two Ø2 mm Alignment Pin Holes Around Each Mounting Hole for Precision Mounting (Dowel Pins Not Included)
- ▶ Vacuum Compatible to 10⁻⁹ Torr at 25 °C with Proper Bake Out
- ▶ 303 Stainless Steel Heat-Treated to Remove Internal Stresses for Increased System Stability

OEM Solutions and Volume Orders

Thorlabs manufactures custom and high-volume Polaris products for use in custom and OEM systems. For pricing information on high-volume orders of our standard posts, please contact OEM Sales.



Click to Enlarge
Directly attach a Polaris mount via a top-located 8-32 (M4) mounting hole without the need for a thread adapter. Dowel pins (not included) provide precision mounting.

These Ø1/2" (Ø12.7 mm) posts feature one top-located 8-32 (M4 x 0.7) mounting hole and one bottom-located 1/4"-20 (M6 x 1.0) mounting hole. They are designed to mount Polaris mirror mounts up to Ø2"; see the table below for the resulting optic axis heights when used with each mount size. Each end of the post has two Ø2 mm alignment pin holes, which are located on either side of the mounting hole. Dowel pins are not included.

A Ø6 mm alignment bore is located 20 mm from the base and can be used in combination with our cage rods for the alignment of multiple mounts along a common optical axis or for fine angle tuning. Note that the alignment bore does not go completely through the PLS-H1 and PLS-H246/M posts. Instead, these posts contain two bores on opposite sides, within ±0.3°, that are 0.15" (3.8 mm) deep. Given their shorter length, a through bore would interfere with the mounting threads and prevent components from being securely attached to the post. In the custom post configurator below, any post with a length of 1.49" (37.6 mm for metric posts) or less will have a similar alignment bore configuration.

Polaris® Mount and Post Interoperability ^a							
Item #	Post Length (L)	Resulting Optical Axis Height (Optic Center)					
		Ø1/2" Mounts ^b	POLARIS-K05P2 Ø1/2" Mount	Ø19 mm Mounts & Ø1" Fixed Mounts	Ø1" & Ø25 mm Kinematic Mounts	Ø1.5 mm Mount & Ø2" Fixed Mount	Ø2" Kinematic Mounts
PLS-H1	1.00"	1.50"	1.62"	1.75"	2.00"	2.25"	2.40"
PLS-H15	1.50"	2.00"	2.12"	2.25"	2.50"	2.75"	2.90"
PLS-H2	2.00"	2.50"	2.62"	2.75"	3.00"	3.25"	3.40"
PLS-H246/M	24.6 mm	37.3 mm	40.3 mm	43.7 mm	50.0 mm	56.4 mm	60.2 mm
PLS-H373/M	37.3 mm	50.0 mm	53.0 mm	56.4 mm	62.7 mm	69.1 mm	72.9 mm
PLS-H496/M	49.6 mm	62.3 mm	65.3 mm	68.7 mm	75.0 mm	81.4 mm	85.2 mm

- Green shaded cells denote standard optical axis heights.
- Excluding the POLARIS-K05P2 Ø1/2" Mirror Mount with Piezo Adjusters

Part Number	Description	Price	Availability
PLS-H246/M	Ø12.7 mm Post for Polaris Mounts, One M4 x 0.7 Mounting Hole, L = 24.6 mm	\$27.00	Today
PLS-H373/M	Ø12.7 mm Post for Polaris Mounts, One M4 x 0.7 Mounting Hole, L = 37.3 mm	\$28.00	Today
PLS-H496/M	Ø12.7 mm Post for Polaris Mounts, One M4 x 0.7 Mounting Hole, L = 49.6 mm	\$29.00	Today
PLS-H1	Ø1/2" Post for Polaris Mounts, One 8-32 Mounting Hole, L = 1.00"	\$27.00	Today
PLS-H15	Ø1/2" Post for Polaris Mounts, One 8-32 Mounting Hole, L = 1.50"	\$28.00	Today
PLS-H2	Ø1/2" Post for Polaris Mounts, One 8-32 Mounting Hole, L = 2.00"	\$29.00	Today

Ø1/2" (Ø12.7 mm) Optical Posts with Hex Tops



- ▶ Constructed of 303 Stainless Steel
- ▶ Universal 7/16" (11 mm) Hex Top
- ▶ One 8-32 (M4) Tapped Hole on Top and One 1/4"-20 (M6) Tapped Hole at Base
- ▶ Removable Double-Ended 8-32 (M4) Setscrew



Click to Enlarge
TH075 in a Post Holder



Click to Enlarge
7/16" (11 mm) Hex for
Extra Leverage During
Tightening

These virtually non-magnetic 303 stainless steel posts are precision ground to Ø1/2" (Ø12.7 mm). One end has a 1/4"-20 (M6) tapped hole, while the other end has a removable SS8E50D 8-32 or SS4M12D M4 threaded setscrew [5/64" (2 mm) hex on both ends]. A common problem with shorter posts is that the thumbscrew of a post holder can get caught in the side-located bore of the post. To prevent this problem, these posts do not have this bore. Instead, the 8-32 (M4) tapped end of the post is a universal 7/16" (11 mm) hex to allow the user to provide extra leverage with a wrench when tightening mounted components. A slim profile wrench (less than 5 mm thick) is recommended for ease of use. To easily distinguish the metric posts from their imperial counterparts, the metric posts have a ring-shaped groove just below the hex.

Part Number	Description	Price	Availability
TH15/M	Customer Inspired! Ø12.7 mm Optical Post with Hex Top, SS, L = 15 mm	\$6.41	Today
TH20/M	Customer Inspired! Ø12.7 mm Optical Post with Hex Top, SS, L = 20 mm	\$6.41	Today
TH060	Customer Inspired! Ø1/2" Optical Post with Hex Top, SS, L = 0.60"	\$6.41	Today
TH075	Customer Inspired! Ø1/2" Optical Post with Hex Top, SS, L = 0.75"	\$6.41	Today

Ø1/2" (Ø12.7 mm) Graduated Stainless Steel Optical Posts



- ▶ Engraved Scale for Accurate Post Height Adjustments
- ▶ Labeled Increments Every 0.05" (1 mm)
- ▶ One 8-32 (M4) Tapped Hole on Top and One 1/4"-20 (M6) Tapped Hole at Base
- ▶ Ideal for Use with Lenses in Series



Click to Enlarge
TR50E/M Graduated
Optical Post




Click to Enlarge
LMR1 Lens Mount on a TR3E
Optical Post

These are identical to our Ø1/2" (Ø12.7 mm) stainless steel (SS) TR posts above, but feature an engraved scale along their side. This scale provides a means to quickly and accurately align optics to your optical axis. A removable SS8E50D 8-32 or SS4M12D M4 threaded setscrew [5/64" (2 mm) hex on both ends] at the top of each post is compatible with many components such as fixed optic mounts, while a 1/4"-20 (M6) tap is on the other end of the post for mounting larger components. A side-located Ø1/8" (Ø3.2 mm) hole is bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components.

Part Number	Description	Price	Availability
TR50E/M	Ø12.7 mm Graduated Optical Post, SS, M4 Setscrew, M6 Tap, L = 50 mm	\$14.98	Today
TR75E/M	Ø12.7 mm Graduated Optical Post, SS, M4 Setscrew, M6 Tap, L = 75 mm	\$17.41	Today
TR2E	Ø1/2" Graduated Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 2"	\$14.98	Today
TR3E	Ø1/2" Graduated Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 3"	\$17.41	Today

Ø1/2" (Ø12.7 mm) Translating Optical Posts




- Provides 0.25" (6.4 mm) of Travel
- 0.04" (1 mm) Travel per Revolution of Adjustment Collar
- Anti-Backlash Spring Design
- Non-Rotating, Lockable Post Translation
- Removable Double-Ended 8-32 (M4) Setscrew

The TRT2 translating post has been designed to provide quick, stable height adjustment of a mounted component within an optical setup. One end has a 1/4"-20 (M6) tapped hole, while the other end has a removable SS8E50D 8-32 or SS4M12D M4 threaded setscrew [5/64" (2 mm) hex on both ends]. The TRT2 features an adjustment collar that translates the post up to 0.25" (6.4 mm) from its nominal position at 0.04" (1.0 mm) per revolution. When fully compressed, the post is 2.00" (50.8 mm) and a maximum length of 2.25" (57.2 mm). Once the desired height is achieved, the TRT2 can be locked into place with the built-in lock ring. Only the adjustment collar and lock ring rotate on the TRT2 to provide translation; neither the top nor the bottom of the post rotate when translated.

Both the adjustment collar and lock ring have diameters slightly smaller than the post diameter, allowing the entire post to pass through all of our Ø1/2" construction accessories without interference. A side-located Ø1/8" (Ø3.2 mm) hole is bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components.

Part Number	Description	Price	Availability
TRT2/M	Ø12.7 mm Translating Optical Post, SS, M4 Setscrew, M6 Tap, L = 50.8 mm to 57.2 mm	\$110.80	Today
TRT2	Ø1/2" Translating Optical Post, SS, 8-32 Setscrew, 1/4"-20 Tap, L = 2" to 2.25"	\$110.80	Today

Ø1/2" (Ø12.7 mm) Optical Construction Posts



- Counterbored and Tapped Posts for Constructing Custom Mounting Configurations
- TR3C (TR75C/M): Five #8 (M4) Counterbores
- TR3T (TR75T/M): Three 8-32 (M4) Tapped Holes
- Removable Double-Ended 8-32 (M4) Threaded Setscrew

These posts are designed for mounting optomechanical components in custom configurations. One end has a 1/4"-20 (M6) tapped hole, while the other end has a removable SS8E50D 8-32 or SS4M12D M4 threaded setscrew [5/64" (2 mm) hex on both ends]. By using a combination of a tapped construction post along with a counterbored construction post, components can be mounted at an arbitrary angle to keep your beam path unobstructed (see image to the right).



Click to Enlarge
TR3T and TR3C for
Mounting at Arbitrary
Angles



Click to Enlarge
Side-Mounted
KM100 Rests Flat on
TR3T

The TR3C (TR75C/M) offers five #8 (M4) counterbores and a mounting flat while the TR3T (TR75T/M) offers three 8-32 (M4) tapped holes and a mounting flat. The posts can be combined by using an 8-32 (M4) cap screw. Additionally, a single post may be used to mount an optomechanical component on its side using the mounting flat on each post (see image to the right).


Part Number	Description	Price	Availability
TR75T/M	Ø12.7 mm Optical Construction Post, SS, M4 Taps	\$19.97	Today
TR75C/M	Ø12.7 mm Optical Construction Post, SS, M4 Counterbores	\$19.97	Today
TR3T	Ø1/2" Optical Construction Post, SS, 8-32 Taps	\$19.97	Today
TR3C	Ø1/2" Optical Construction Post, SS, #8 Counterbores	\$19.97	Today

Ø1/2" (Ø12.7 mm) Non-Magnetic, Low-Reflectivity Aluminum Posts



- ▶ Post Constructed using Non-Magnetic Hardcoated Aluminum
- ▶ Black Anodized Hard Coating Provides Lower Reflectivity Than Our Stainless Steel Posts
- ▶ One 8-32 (M4) Tapped Hole on Top and One 1/4"-20 (M6) Tapped Hole at Base
- ▶ Removable Double-Ended 8-32 (M4) 300 Series Stainless Steel Setscrew
- ▶ Available in Lengths Ranging from 0.75" to 6" (20 to 150 mm for Metric Posts)

These non-magnetic Ø1/2" posts are made using precision-ground hardcoated aluminum. The anodized hard coat on each post provides an ultra-hardened surface (60 - 70 Rockwell C Scale) for increased wear, abrasion, and corrosion resistance, as well as a black surface for low reflectivity in the ultraviolet and visible wavelength ranges. Therefore, these posts are ideal for applications that are sensitive to magnetic fields or require lower reflection than our stainless steel posts (see the *Anodization Classes* tab for more information). One end has a 1/4"-20 (M6) tapped hole, while the other end has a removable SS8E50D 8-32 or SS4M12D M4 300 series stainless steel setscrew [5/64" (2 mm) hex on both ends]. A side-located Ø1/8" (Ø3.2 mm) hole is bored straight through the post; using a balldriver or the SPW501 Spanner wrench on the hole provides extra leverage when tightening mounted components.



Click to Enlarge
Click Here for Raw Data
Our black anodized posts provide low reflectance in the ultraviolet and visible wavelength ranges for which the shaded blue region serves as a guide to the eye; however, the higher reflectance above 700 nm may cause unwanted reflections, especially with intense near-infrared sources.

Part Number	Description	Price	Availability
TRA20/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 20 mm	\$12.20	Today
TRA30/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 30 mm	\$12.20	Today
TRA40/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 40 mm	\$12.60	Today
TRA50/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 50 mm	\$12.84	Today
TRA75/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 75 mm	\$13.24	Today
TRA100/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 100 mm	\$13.95	Today
TRA150/M	Customer Inspired! Ø12.7 mm Aluminum Post, M4 Setscrew, M6 Tap, L = 150 mm	\$15.27	Today
TRA075	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 0.75"	\$12.20	Today
TRA1	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 1"	\$12.20	Today
TRA1.5	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 1.5"	\$12.60	Today
TRA2	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 2"	\$12.84	3 weeks
TRA3	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 3"	\$13.24	Today
TRA4	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 4"	\$13.95	Today
TRA6	Customer Inspired! Ø1/2" Aluminum Post, 8-32 Setscrew, 1/4"-20 Tap, L = 6"	\$15.27	Today

Ø1/2" Post Spacers



- ▶ Available in 1 mm Increments from 1 mm to 10 mm
- ▶ 1/4" (M6) Clearance Hole
- ▶ Thickness Tolerance of ± 0.001 "
- ▶ Each Pack Includes Five Post Spacers

These stainless steel post spacers, also known as shims, are designed for achieving intermediate heights of our TR series Ø1/2" posts without compromising structural rigidity. They have a diameter of 0.50" (12.7 mm) to fit underneath the Ø1/2" posts sold above. The center clearance hole allows 1/4"-20 (M6) setscrews to pass through to the mating tap of the components on either side of the spacer.

By adding a Ø1/2" post spacer to a TR series post, it is easy to adjust the height of the center of optical components. An optic mounted in our LMR1(/M) or FMP1(/M) mount has its center at a height of 0.87" (22.1 mm) above the top of the post. Placing a TR3M post spacer under the post brings the optical axis height to 0.99" (25.1 mm).

Setscrews are not included with these post spacers. 1/4"-20 and M6 setscrews are available here.



Click to Enlarge
TR4M Post Spacer
Underneath a TR3 Post with
a KM100 Mirror Mount.
The 1/4"-20 setscrew is
threaded directly into the
optical table.

Part Number	Description	Price	Availability
TR1M	Ø1/2" Post Spacer, 1 mm Thick, Qty. 5	\$19.97	Today
TR2M	Ø1/2" Post Spacer, 2 mm Thick, Qty. 5	\$19.97	Today
TR3M	Ø1/2" Post Spacer, 3 mm Thick, Qty. 5	\$19.97	Today
TR4M	Ø1/2" Post Spacer, 4 mm Thick, Qty. 5	\$22.41	Today
TR5M	Ø1/2" Post Spacer, 5 mm Thick, Qty. 5	\$23.03	Today
TR6M	Ø1/2" Post Spacer, 6 mm Thick, Qty. 5	\$23.38	Today
TR7M	Ø1/2" Post Spacer, 7 mm Thick, Qty. 5	\$24.60	Today
TR8M	Ø1/2" Post Spacer, 8 mm Thick, Qty. 5	\$24.60	Today
TR9M	Ø1/2" Post Spacer, 9 mm Thick, Qty. 5	\$26.18	Today
TR10M	Ø1/2" Post Spacer, 10 mm Thick, Qty. 5	\$26.18	Today

Spanner Wrench for Ø1/2" (Ø12.7 mm) and Ø1" (Ø25.0 mm) Posts



The SPW501 Spanner Wrench is designed to tighten or loosen Ø1" posts that have torque slots, as illustrated in the photo to the right. The SPW501 can also be used with Ø1/2" posts and Ø1" posts that have through holes. The wrench is designed to fit into the slot or through hole and provide leverage for tightening or loosening the post when mounting the post directly to a tapped hole. Please use minimal force when tightening to prevent binding due to overtightening.



Click to Enlarge
The SPW501 wrench tightens
Ø1" posts that have torque slots
or holes.

Part Number	Description	Price	Availability
SPW501	Spanner Wrench for Ø1/2" Posts and Ø1" Posts	\$19.10	Today

Visit the *Optical Posts: Ø1/2" and Ø12 mm* page for pricing and availability information:

https://www.thorlabs.com/newgrouppage9.cfm?objectgroup_id=1266

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

