

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Agilent Technologies E5900B Emulation Probes

Data Sheet



Figure 1. Agilent E5900B emulation probe

- **Support for ARM7/ARM9/ARM9TDMI, MIPS, Motorola/IBM PowerPC 4xx, 6xx, & 8xx; MPC 82xx; MPC 74xx and M•Core processors**
- **10/100T LAN connectivity to industry-standard debuggers**
- **Download speeds up to 1Mbyte/sec**
- **Standalone operation with an industry-leading debugger**
- **Operation coupled with logic analyzers and oscilloscopes in the Agilent 16700 Series logic analysis systems for complete target system analysis**
- **Support for 1.2 V to 5 V operation**
- **IEEE 1149.1 (JTAG) or BDM connection to the processor's debug port**
- **Self powered, no target power required**
- **Easy upgrade to meet changing processor needs**

The Agilent E5900B series of emulation probes provide an electrical interface to a supported microprocessor's on-chip debug port (BDM or JTAG), enabling access for either debuggers or Agilent 16700 Series logic analyzers and oscilloscopes.

Agilent E5900B emulation probes connect to industry-leading debuggers via 10/100 Base-T LAN. While operating with the debugger, the probes provide code downloading as well as run control and access to on-chip registers and memory.

The emulation probes are self-powered, making them ideally suited for working in battery-powered and other systems that have not budgeted extra power for debug tools.

Debugger Interface

Agilent engineering labs have tested the compatibility of the E5900B probes with industry-leading debuggers and development systems from Green Hills, Mentor Graphics, Metrowerks and Wind River for a wide range of processors. Please refer to the Agilent web site for the most current listing of debuggers at www.agilent.com

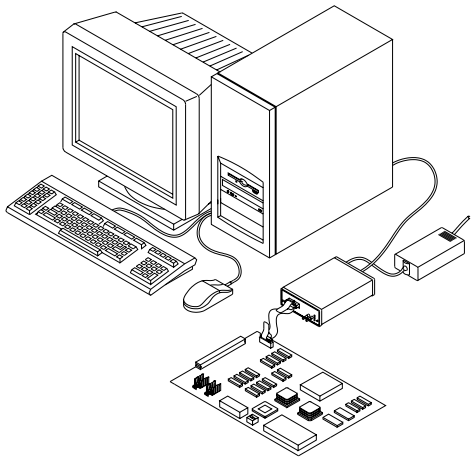


Figure 2. Agilent E5900B operating with a PC hosted debugger via LAN connection

A System Troubleshooting Tool

Coupling an oscilloscope and/or logic analyzer to an emulation probe via the probe's trigger output and break input ports lets you view system operation as related to CPU status. For example, in systems where the processor supports an external break input, an oscilloscope's trigger output can command the processor to break if a critical control line ever enters a specified state.

Agilent Technologies

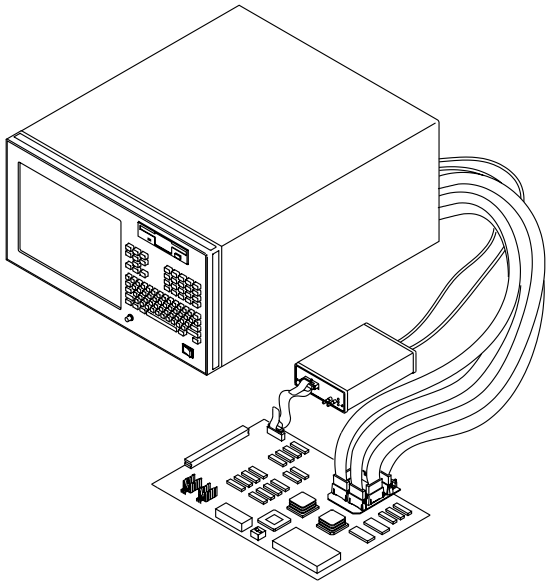


Figure 3. Agilent E5900B emulation module operating with the 16702 logic analyzer

Quickly Isolate System Integration Problems

The Agilent E5900B emulation probes can be tightly coupled to the Agilent 16700 Series logic analysis systems. These systems enable quick determination of your most difficult hardware, software and system integration problems. The E5900B operate under control of the logic analyzer via the LAN or with the addition of the E5901B emulation module. With logic analysis providing timing and state analysis of system operation, the emulation probe can monitor internal microprocessor activity. This combination of logic analysis and emulation gives you a view of your total system, encompassing everything from signals to source code.

Easy Migration Protects Your Investment

The E5900B emulation probes can continue to be useful development tools when a different processor is selected for new projects. Agilent migration kits provide an easy and economical method to convert existing emulation probes to keep up with your changing processor needs.

Selection Guide

Select the configuration of the emulation probe for your application from the following table.

Processor	Agilent E5900B Option #
Arm	
ARM7/9 TDMI	300
ARM7/9	
IBM	
PPC 4xx	060
PPC 6xx	060
PPC7xx	070
MIPS	
MIPS 32 4Kc	
MIPS 32 4Km	200
MIPS 32 4Kp	
MIPS 64 5Kc	
Motorola	
MPC 6xx	060
MPC 7xx	070
MPC 8xx	080
MPC 74xx	110
MPC 82xx	100
M•CORE	090

Performance Characteristics

Probe Input/Output Characteristics	
Target connection	JTAG as per IEEE 1149.1 specification. Pin out is specific to the processor. Details of the JTAG con nection pin out can be found on the Agilent web at **http://www.agilent.com**
JTAG Input Characteristics	
TDO, DBGACK, & RTCK	R_{in} = 4.7k Ω pull-up to V_{ref} C_{in} TDO = 75 pF, BDGACK = 95 pF, DTCK = 80 pF
TDO sampling with respect to TCK	Selectable: falling or rising TCK Minimum required setup & hold window = 7.0 ns t_{su} = 7.5 ns, t_h = -0.5 ns
V_{ref}[1]	R_{in} = 25k Ω pull down to ground
SRST[2]	R_{in} (inactive) = 4.7k Ω pull-up to V_{ref} R_{in} (active) = 12 Ω pull down to ground C_{out} = 200 pF
JTAG Output Characteristics	
TDI, TCK, TMS, TRST, & DBGRQ	V_{oh}/I_{oh} = 66 +/- 15 Ω to V_{ref} V_{0l}/I_{0l} = 66 =/-15 Ω to 0.2V
Delay	TDI & TMS delay from TCK falling edge to TDI and TMS valid Min 1 ns max 2.5 ns
Operating Voltage	
Operating range	1.2 V to 5.0 V
Communications	
LAN	RJ-45 connector IEEE 802.3 Auto sensing 10/100 BASE-T Ethernet maximum download speed 1 Mbyte/sec
Trigger out	SMB (m) 2 V into 50 ohm load
Break in	SMB (m) Input RC = 2k ohms & 20 pF Edge triggered, TTL level Maximum input = 5V above VCC
Power	
Power supply	12 V dc, maximum current = 1 A External module, 100–240 V input auto sensing 50/60 Hz, IEC 320 connector
Physical size	105 mm (4.13 inch) wide x 151 mm (5.94 inch) deep x 40 mm (1.57 inch) high
Environmental	
Temperature	Operating: 0˚C to +40˚C (+32˚F to +104˚F) Not operating: -40˚C to +60˚C (-40˚ to +140˚F)
Altitude	Operating and not operating; 4600 m (15 K feet)
Relative humidity	80% @ 40˚C for 24 hours
Regularity Compliance	
	EMC CISPR 11:1990/EN 55011:1991 Group 1, Class A IEC 801-2:1991/EN50082-1:1992 4kVCD,8kV AD IEC 801-3:1994/EN 50082:1993 3 V/m (1 kHz 80% AM,27-1 kMz) IEC 801-4:1998/EN 50082-1:1992 0.RkV Sig lines, 1 kV power lines
Safety Approval	
	IEC 1010-1:1990; AMD 1:1992; UL 1244; CSA-C22.2 No. 231

1. V_{ref} is used to determine the target power status and the reference for input threshold and output voltage swings. The Agilent emulation probes do not draw power from the target system.
2. Open collector output. Pulled up to generated voltage equivalent to the V_{ref} voltage with a 2.61 k Ω pull-up resistor.

E5900B Emulation Probe Options

Option Number	Processors Supported
060	PPC 4xx, PPC 6xx, & MPC 6xx
070	MPC 7xx
080	MPC 8xx
090	M•Core
100	MPC 82xx
110	MPC 7400, MPC 7410,MPC7440 and MPC 7450
200	MIPS 32 MIPS 64
300	ARM7, ARM 9, & ARM 9 TDMI

Note: Most current supported processor information can be obtained form the Agilent web at
www.cos.agilent.com/probe

Ordering Information

E5900B Emulation Probe
Emulation probe that provides access to the processor via BDM or JTAG interface.

Supplied with power supply, line cord, User's Guide, and processor specific interface cables.

E5901B Emulation Module
Emulation probe and interface module for Agilent 16700 Series logic analyzer.

Supplied with E5900B emulation probe, emulation interface module, power supply, line cord, logic analyzer application software, and processor specific interface cables.

E5902B Migration Kit
Personality conversion of an existing E5900B emulation probe or E5901B emulation module to support a different processor.

Supplied with software to reprogram the E5900B, User's Guide, tool kit, and processor specific interface cables.

Recommended Accessories

8120-5048 SMB (f) to BNC (m)
50 Ω trigger cable 1.22 m (48 inch)

Related Literature	Document Number
Agilent Technologies 16700 Series Logic Analysis System, Product Overview	5968-9661E
Processor and Bus Support for Agilent Technologies Logic Analyzers, Configuration Guide	5966-4365E

Agilent Technologies' Test and Measurement Support, Services, and Assistance
Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise
Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage
Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent T&M Software and Connectivity
Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit
www.agilent.com/find/connectivity
for more information.



Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.

By internet, phone, or fax, get assistance with all your test & measurement needs

Phone or Fax

United States:
(tel) 800 829 4444

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
Email: tm_asia@agilent.com

Online Assistance:
ww.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2004
Printed in USA, March 5, 2004
5988-2966EN



Agilent Technologies

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP