



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗


### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

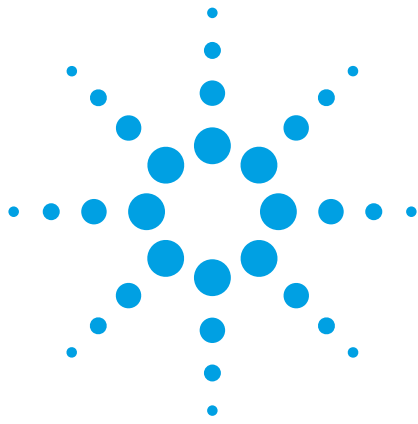

# ESA-E Series Spectrum Analyzer

## Data Sheet

### Available frequency ranges:

E4402B	9 kHz to 3.0 GHz
E4404B	9 kHz to 6.7 GHz
E4405B	9 kHz to 13.2 GHz
E4407B	9 kHz to 26.5 GHz

## Table of Contents

- ▶ Definitions of Specifications
- ▶ ESA-E Express Analyzer
- ▶ Options
- ▶ Frequency Specifications
- ▶ Amplitude Specifications
- ▶ Tracking Generator
- ▶ Quasi-Peak Detector
- ▶ General Specifications

Customers looking for a general purpose spectrum analyzer will appreciate the flexibility of the Agilent ESA-E Series spectrum analyzer, which can be used for a wide range of applications from aerospace and defense to the manufacturing line. With express analyzer configurations (STD/STG/COM), customers will benefit from faster delivery and its price advantage.

Customers wanting to take advantage of the ESA flexibility, but who need a faster analyzer for the manufacturing line, or connectivity to LAN/USB in addition to GPIB, or want to do in depth signal analysis with 89601A VSA software, will benefit from the new Agilent EXA signal analyzer. For comparison convenience, the EXA specifications are shown in this ESA-E data sheet.



**Agilent Technologies**

## Definition of Specifications

The ESA-E Series spectrum analyzers are tested to ensure they will meet their warranted performance. Unless otherwise stated, all specifications are valid over 0 to 55 °C. Supplemental characteristics, shown in italics, are intended to provide additional information that is useful in using the instrument. These typical (expected) or nominal performance parameters are not warranted but represent performance that 80 percent of the units tested exhibit with 95 percent confidence at room temperature (20 to 30 °C). This data sheet is intended as a quick reference to ESA-E spectrum analyzer specifications, and is by no means complete.

## ESA-E Express Analyzer Options

The ESA-E Series spectrum analyzers have three express analyzer options: STD, STG, and COM.

**ESA standard express analyzers (STD/STG):** All standard express analyzers include fast time domain sweep, FM demodulation, and GPIB connection. To add the functionality of a tracking generator, only available on the ESA, order the STG option.

**ESA communication express analyzers (COM):** The ESA communication analyzer includes many additional options required to demodulate select wireless standards.

The new EXA signal analyzer is a great alternative to the ESA-COM express analyzer. All demodulation hardware and speed advantages are standard. In addition, the EXA can run the 89601A VSA software internally to demodulate even the most difficult wireless signals. For a lower cost VSA alternative, many customers are now using the 89601X VXA measurement application for their remote demodulation needs with SCPI programming. The 89601X is only available on the X-Series signal analyzers (MXA/EXA) and is not offered on the ESA spectrum analyzer.

► This data sheet is a summary of the complete specifications and conditions, which are available in their entirety in the ESA Specification Guide and EXA Specification Guide. Each of these guides can be found online at [www.agilent.com](http://www.agilent.com) by searching for their respective publication numbers: E4401-90490 or N9010-90012.

# Frequency Specifications

Frequency range	ESA-E spectrum analyzer	EXA signal analyzer (Comparable model number)
9 kHz to 3 GHz	E4402B	N9010A-503
9 kHz to 6.7 GHz	E4404B	N9010A-507
9 kHz to 13.2 GHz	E4405B	N9010A-513
9 kHz to 26.5 GHz	E4407B	N9010A-526

Band break					
Frequency range	ESA-E spectrum analyzer		EXA signal analyzer		
	Band	Harmonic (N <sup>a</sup> ) mixing mode	Frequency range	Band	Harmonic (N) mixing mode
100 Hz to 3 GHz	0	1-	9 kHz to 3.6 GHz	0	1
2.85 to 6.7 GHz	1	1-	3.5 to 7.0 GHz	1	1
6.2 to 13.2 GHz	2	2-	3.5 to 8.4 GHz	1	1
12.8 to 19.2 GHz	3	4-	6.9 to 13.6 GHz	2	2
18.7 to 26.5 GHz	4	4-	13.5 to 17.1 GHz	3	2
			17 to 26.5 GHz	4	4

Measurement speed			
Local measurement and display update rate	33 ms, (30/s)	Local measurement and display update rate	11 ms, (90/s) nominal
Remote measurement and GPIB transfer rate	33 ms, (30/s)	Remote measurement and GPIB transfer rate	14 ms
Marker peak search	300 ms	Marker peak search	5 ms nominal
Center frequency tune and transfer (RF)	< 90 ms	Center frequency tune and transfer (RF)	51 ms nominal
Center frequency tune and transfer ( $\mu$ W)	350 ms	Center frequency tune and transfer ( $\mu$ W)	86 ms nominal

a. N is the harmonic mixing mode. For negative mixing modes (as indicated by the “-”), the desired first LO harmonic is higher than the tuned frequency by the first IF (3.9214 for the 9 kHz to 3 GHz band, 321.4 MHz for all other bands.)

# Frequency Specifications (continued)

	ESA-E spectrum analyzer		EXA signal analyzer	
	STD/STG standard express analyzer	COM express analyzer or ESA-E with Option 1D5	N9010A any frequency range	
<b>Frequency reference</b>				
	Frequency reference error = $\pm[(\text{aging rate} \times \text{time since last adjustment}) + \text{settability} + \text{temperature stability}]$		Frequency reference accuracy = $\pm[(\text{aging rate} \times \text{time since last adjustment}) + \text{settability} + \text{calibration accuracy}]$	
	Frequency readout accuracy (start, stop, center, marker) = $\pm(\text{frequency indication} \times \text{frequency reference error} + \text{SP}^a + 15\% \text{ of RBW} + 10 \text{ Hz} + 1 \text{ Hz} \times \text{N}^b)$		Frequency readout accuracy = $\pm(\text{marker frequency} \times \text{frequency of reference accuracy} + 0.25\% \times \text{span} + 5\% \text{ of RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution}^c)$	
Aging rate	$\pm 2 \times 10^{-6}/\text{year}$ $\pm 1 \times 10^{-7}/\text{year}$ (Option 1D5)	$\pm 1 \times 10^{-7}/\text{year}$	Option PFR $\pm 1 \times 10^{-7}/\text{year}$ $\pm 1.5 \times 10^{-7}/2 \text{ years}$	Standard $\pm 1 \times 10^{-6}/\text{year}$
Temperature stability	$\pm 5 \times 10^{-6}$ $\pm 1 \times 10^{-8}^d$ (Option 1D5)	$\pm 1 \times 10^{-8}^d$	Option PFR $\pm 1.5 \times 10^{-8}^d$	Standard $\pm 2 \times 10^{-6}^d$
Settability (ESA-E) Internal calibration (EXA)	$\pm 5 \times 10^{-7}$ $\pm 1 \times 10^{-8}$ (Option 1D5)	$\pm 1 \times 10^{-8}$	Option PFR $\pm 4 \times 10^{-8}$	Standard $\pm 1.4 \times 10^{-6}$
Span coefficient (SP) <sup>a</sup>	$[0.5\% + 1/(\text{sweep points} - 1)] \times \text{span}$			
External reference	10 MHz	1 to 30 MHz		
<b>Marker frequency counter<sup>e</sup></b>				
Accuracy	$\pm(\text{marker frequency} \times \text{frequency reference error} + \text{counter resolution})$ Counter resolution = selectable from 1 Hz to 100 kHz		$\pm(\text{marker frequency} \times \text{frequency reference accuracy} + 0.100 \text{ Hz})$	
Counter resolution	Selectable from 1 Hz to 100 kHz		0.001 Hz	
<b>Frequency span</b>				
Range	0 Hz (zero span), 100 Hz to maximum frequency range of the instrument		0 Hz (zero span), 10 Hz to maximum frequency of instrument	
<b>Accuracy</b>				
	Linear scale = $\pm[0.5\% \times \text{span} + 2 \times \text{span}/(\text{sweep points} - 1)]$		Swept = $\pm(0.25\% \times \text{span} + \text{horizontal resolution})$	
	Log scale = 2% of span, nominal		FFT = $\pm(0.10\% \times \text{span} + \text{horizontal resolution})$	

- a. +5% of span + . Sweep points fixed at 401 for basic analyzer.  
b. N is the harmonic mixing mode. For negative mixing modes (as indicated by the “-”), the desired first LO harmonic is higher than the tuned frequency by the first IF (3.9214 for the 9 kHz to 3 GHz band, 321.4 MHz for all other bands.)  
c. Horizontal resolution is span/(sweep points - 1.)  
d. 20 to 30 °C.  
e. Not available in RBW < 1 kHz (Option 1DR.)

## Frequency Specifications (continued)

		ESA-E spectrum analyzer		EXA signal analyzer
		STD/STG standard express analyzer or ESA-E with Option AYX	COM express analyzer or ESA-E with Option B7D/B7E	N9010A any frequency range
<b>Sweep time and trigger</b>				
	Span = 0 Hz	50 ns <sup>a</sup> to 4000 s	25 ns <sup>a</sup> to 4000 s	1 μs to 6000 s
Range	Span ≥ 100 Hz (ESA) Span ≥ 10 Hz (EXA)	1 ms to 4000 s		1 ms to 4000 s
Accuracy (Span = 0 Hz)		±1%		±0.01% nominal
Trigger type <sup>b</sup>		Free run, single, line, video, offset, delayed, external		Free run, line, video, external 1, external 2, RF burst, periodic timer
Time gating		Gate (1D6)		Gated LO, gated video, gated FFT
Burst trigger		NA	RF burst (B7E)	Standard
<b>Sweep (trace) points</b>				
	Span = 0 Hz	2 to 8192		1 to 20001
Range	Span ≥ 100 Hz (ESA) Span ≥ 10 Hz (EXA)	101 to 8192		1 to 20001

a. RBW ≥ 1 kHz, 2 sweep points.

b. TV trigger available with Option B7B in custom configuration for ESA-E.

# Frequency Specifications (continued)

		ESA-E spectrum analyzer		EXA signal analyzer
		STD/STG standard express analyzer	COM express analyzer or ESA-E with Option 1DR and 1D5	N9010A any frequency range
<b>Bandwidth</b>				
Range	- 3 dB - 6 dB EMI	1 kHz to 5 MHz <sup>a</sup> 9 kHz, 120 kHz	1 Hz to 5 MHz <sup>a</sup> 200 Hz, 9 kHz, 120 kHz	
	3.01 dB			1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz
	With 1DR <sup>b</sup> - 3 dB - 6 dB EMI	Add 10 Hz - 300 Hz Add 200 Hz	Included	Narrow RBW is standard in the EXA. Values are same as above
	With 1DR and 1D5 <sup>c</sup>	Add 1 Hz and 3 Hz	Included	
<b>Resolution bandwidth accuracy</b>				
Bandwidth	1 to 300 Hz	±10%		1 Hz to 750 kHz ±1.0% (±0.044 dB)
	1 kHz to 3 MHz	±15%		820 kHz to 1.2 MHz (< 3.6 GHz CF) ±2.0% (±0.088 dB)
	5 MHz	±30%		1.3 to 2.0 MHz (< 3.6 GHz CF) ±0.07 dB nominal
				2.2 to 3 MHz (< 3.6 GHz CF) ±0.15 dB nominal
				4 to 8 MHz (< 3.6 GHz CF) ±0.25 dB nominal
<b>Selectivity (60 dB/3 dB) bandwidth ratio</b>				
Bandwidth	100 to 300 Hz	< 5:1 digital, approximately Gaussian		4.1:1 nominal (all frequency ranges)
	1 kHz to 5 MHz	< 15:1 synchronously tuned four poles, approximately Gaussian		
		<b>Video bandwidths (1-3-10 sequence)</b>		<b>Video bandwidth range</b>
Range with 1DR	30 Hz to 3 MHz. Adds 1, 3, 10 Hz for RBWs less than 1 kHz		Narrow RBW is standard in the EXA	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)

a. For resolution bandwidths < 1 kHz or > 3 MHz, not compatible with the rms detector.

b. Only available for spans < 5MHz.

c. Firmware revision A.08.00 and later.

## Frequency Specifications (continued)

	ESA-E spectrum analyzer		EXA signal analyzer
	STD/STG/COM express analyzers	ESA-E with Option 120 <sup>a</sup>	All EXA configurations
<b>Noise sidebands (Phase noise)</b>			
	CF = 1 GHz, 1 kHz RBW, 30 Hz VBW, sample detector, with signal $\leq -90$ dBc/Hz from peak of the carrier		CF = 1 GHz
<b>Offset from CW signal</b>			
10 kHz	$-98, -101$ dBc/Hz (Option 1D5) <sup>b</sup>	NA	$-98$ dBc/Hz $-102$ dBc/Hz
100 kHz	$-118, -122$ dBc/Hz	NA	$-111$ dBc/Hz $-114$ dBc/Hz
1 MHz	$-125, -127$ dBc/Hz	$-133, -136$ dBc/Hz	$-129$ dBc/Hz $-134$ dBc/Hz
10 MHz	$-131, -136$ dBc/Hz	$-137, -141$ dBc/Hz	$-143$ dBc/Hz (nominal)
<b>Residual FM (peak-to-peak)</b>			
1 kHz RBW and 1 kHz VBW (measurement time)	$\leq 150$ Hz $\times$ N <sup>c</sup> (100 ms) $\leq 10$ Hz $\times$ N <sup>c</sup> (20 ms), Option 1DR $\leq 2$ Hz peak-to-peak $\times$ N <sup>c</sup> , (20 ms), Option 1DR and 1D5		Option PFR $\leq 0.25$ Hz $\times$ N <sup>c</sup> (20 ms nominal)
Option 1D5 only 100 ms	$\leq 100$ Hz $\times$ N <sup>c</sup>		Standard $\leq 10$ Hz $\times$ N <sup>c</sup> (20 ms nominal)
Option 1DR only 20 ms	$\leq 10$ Hz $\times$ N <sup>c</sup>		
Option 1DR and 1D5 only 20 ms	$\leq 2$ Hz peak-to-peak $\times$ N <sup>c</sup>		

a. Enhanced wide offset phase noise and ACPR dynamic range.

b. Option 1DR is required for phase noise measurements at frequency offsets of 10 kHz and less. Performance at 10 kHz offset without Option 1DR is  $-90$  dBc/Hz.

c. N = LO Harmonic mixing number.



# Amplitude Specifications

		ESA spectrum analyzer			EXA signal analyzer	
		E4402B	E4404B/05B	E4407B	All frequency ranges	
<b>Amplitude range</b>						
<b>Measurement range</b>		Displayed average noise level (DANL) to maximum safe input level			Displayed average noise level (DANL) to +23 dBm	
Mechanical input attenuator range		0 to 75 dB in 5 dB steps	0 to 75 dB in 5 dB steps	0 to 65 dB in 5 dB steps	Standard	0 to 60 dB in 10 dB steps
					Option FSA	0 to 60 dB in 2 dB steps
					Option EA3	0 to 24 dB in 1 dB steps
Electronic input attenuator range					Full attenuation range with EA3 <sup>a</sup>	0 to 84 dB in 1 dB steps
<b>Maximum safe input level</b>						
Average continuous power		+30 dBm (1 W)			+30 dBm (1 W)	
Peak pulse power		+50 dBm (100 W) <sup>b</sup>			< 10 μs pulse width, < 1% duty cycle + 50 dBm (100 W) and input attenuation ≥ 30 dB	
DC voltage	DC coupled	0 Vdc (Option UKB)	0 Vdc	0 Vdc	±0.2 Vdc	
	AC coupled	100 Vdc 50 Vdc (Option UKB)	50 Vdc	50 Vdc (Option UKB)	±70 Vdc	
<b>1 dB gain compression Total power at input mixer<sup>c</sup></b>		Two tone				
50 MHz to 6.7 GHz		0 dBm			Preamp on (P03) 10 MHz to 3.6 GHz	-10 dBm nominal
6.7 to 13.2 GHz		-3 dBm			20 MHz to 26.5 GHz	+9 dBm nominal
13.2 to 26.5 GHz		-5 dBm				

a. Full attenuation range 0 to 84 dB is mechanical + electronic attenuation.

b. < 10 μs pulse width, < 1% duty cycle.

c. Mixer power level (dBm) = input power (dBm) - input attenuation (dB).

# Amplitude Specifications (continued)

ESA spectrum analyzer					EXA signal analyzer	
STD/STG express analyzer		COM express analyzer or ESA with 1DR and 1D5			All frequency ranges	
E4402B	E4404/05B/07B	E4402B	E4404/05/7B			
Displayed average noise level (dBm) (input terminated, 0 dB attenuation, sample detector) specifications <i>Typical values shown in italic</i>						
Conditions	10 Hz RBW/1 Hz VBW (Option 1DR)		1 Hz RBW/VBW (ESA with Option 1DR and 1D5)			
Frequency						
1 to 10 MHz	<i>-139</i>	<i>-137, -139<sup>a</sup></i>	<i>-146, -149<sup>a</sup></i>	<i>-147, -149<sup>a</sup></i>	<i>-145, -149</i>	
10 to 500 MHz	<i>-136, -140</i>	<i>-135, -139</i>	<i>-150</i>	<i>-149</i>	<i>-146, -150</i>	
500 MHz - 1 GHz						
1 to 1.5 GHz	<i>-135, -140</i>			<i>-150</i>		<i>-150</i>
1.5 to 2 GHz						
2 to 3 GHz	<i>-133, -140</i>	<i>-131, -138</i>	<i>NA</i>	<i>-148</i>	<i>-146, -148</i>	
3 to 6 GHz	<i>NA</i>			<i>NA</i>	<i>-147</i>	<i>-144, -149</i>
6 to 12 GHz		<i>-130, -137</i>			<i>-144</i>	<i>-143, -147</i>
12 to 22 GHz		<i>-126, -134</i>			<i>-142</i>	<i>-137, -142</i>
22 to 26.5 GHz		<i>-125, -132</i>	<i>-142</i>		<i>-134, -140</i>	
Displayed average noise level (dBm) with RF preamplifier <sup>b</sup>						
1 to 10 MHz	<i>-152</i>	<i>-155</i>	<i>-162</i>	<i>-165</i>	<i>NA</i>	
10 MHz to 1 GHz	<i>-152, -156</i>	<i>-151, -157</i>	<i>-166</i>	<i>-167</i>	<i>-160, -162</i>	
1 to 2 GHz		<i>-151, -155</i>		<i>-165</i>		
2 to 3 GHz	<i>-151, -154</i>	<i>-149, -152</i>	<i>-164</i>	<i>-162</i>	<i>-159, -160</i>	

a. Custom path only, Option 120, typical.

b. 20 to 30 °C. For 0 to 50 °C range see specification guide.

## Amplitude Specifications (continued)

	ESA-E spectrum analyzer (express or custom configuration)	EXA signal analyzer
<b>Spurious responses</b> <i>Typical values shown in italic</i>		
Third order intermodulation distortion (TOI)	For two -30 dBm signals at input mixer <sup>a</sup> and > 50 kHz separation	For two -30 dBm signals at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see specification guide for IF prefilter bandwidths
10 to 100 MHz	7 dBm, characteristic	NA
100 to 400 MHz	< -85 dBc, +12.5 dBm; <i>+16 dBm TOI</i>	-80 dBc, +10 dBm, <i>+14 dBm</i>
400 MHz to 1.7 GHz		-82 dBc, +11 dBm, <i>+15 dBm</i>
1.7 to 3.0 GHz		-86 dBc, +13 dBm, <i>+17 dBm</i>
3.0 to 3.6 GHz	< -82 dBc, +11 dBm; <i>+18 dBm TOI</i>	
3.6 to 6.7 GHz		-82 dBc, +11 dBm, <i>+15 dBm</i>
6.7 to 7.0 GHz	< -75 dBc, +7.5 dBm; <i>+12 dBm TOI</i>	
7.0 to 13.2 GHz		-82 dBc, +11 dBm, <i>+15 dBm</i>
13.2 to 13.6 GHz	< -75 dBc, +7.5 dBm; <i>+11 dBm TOI</i>	
13.6 to 26.5 GHz		-78 dBc, +9 dBm, <i>+14 dBm</i>
<b>Second harmonic distortion</b>		
2 to 750 MHz - 40 dBm tone at input mixer <sup>a</sup>		See EXA Data Sheet or EXA Specification Guide for SHI details
10 to 500 MHz - 30 dBm tone at input mixer <sup>a</sup>	< -65 dBc, +35 dBm SHI	
500 MHz to 1.5 GHz - 30 dBm tone at input mixer <sup>a</sup>	< -75 dBc, +45 dBm SHI	
1.5 to 2.0 GHz - 10 dBm tone at input mixer <sup>a</sup>	< -85 dBc, +75 dBm SHI	
> 2 GHz - 10 dBm tone at input mixer <sup>a</sup>	< -100 dBc, +90 dBm SHI	

a. Mixer power level (dBm) = input power (dBm) - input attenuation (dB).

## Amplitude Specifications (continued)

	ESA spectrum analyzer		EXA signal analyzer	
	STD/STG express analyzer or ESA with Option AYX	COM express analyzer or ESA with Option B7D/B7E	All frequency ranges	
<b>Display range</b>				
Log scale	0.1, 0.2, 0.5 dB/division 1 to 20 dB/division in 1 dB steps (10 display divisions)		0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)	
Linear scale	10 divisions		10 divisions	
Scale units	dBm, dBmV, dB $\mu$ V, dB $\mu$ A, A, V, W, and Hz (Option BAA or AYQ)		dBm, dBmV, dB $\mu$ V, dBmA, dB $\mu$ A, V, W, and A	
Trace detectors	Peak, negative peak, sample, rmsb, video averaging		Peak, negative peak, sample, normal, log power average, RMS average, and voltage average	

	ESA spectrum analyzer		EXA signal analyzer	
	Standard analyzer or ESA with Option AYX	Communications test analyzer or ESA with Option B7D/B7E	All frequency ranges	
<b>Resolution bandwidth switching uncertainty</b>				
	Referenced to 1 kHz at reference level		Referenced to 30 kHz RBW	
1 Hz, 3 Hz RBW	$\pm 0.3$ dB (Option 1DR, Option 1D5)	$\pm 0.3$ dB (Option 1D5)	1 Hz to 1.5 MHz RBW	$\pm 0.08$ dB
10 Hz, 30 Hz RBW	$\pm 0.3$ dB (Option 1DR)	$\pm 0.3$ dB		
100 Hz, 300 Hz RBW	$\pm 0.3$ dB (Option 1DR)	$\pm 0.3$ dB		
1 kHz to 1.5 MHz RBW	$\pm 0.3$ dB		1.6 to 3 MHz RBW	$\pm 0.1$ dB
1.5 to 3 MHz RBW			4, 5, 6, 8 MHz RBW	$\pm 1.0$ dB
5 MHz RBW	$\pm 0.6$ dB			

# Amplitude Specifications (continued)

ESA spectrum analyzer		EXA signal analyzer	
Express analyzer or custom analyzer configuration		All frequency ranges	
<b>Frequency resolution</b>			
<b>Input attenuator switching uncertainty (at 50 MHz)</b>			
ESA specifications vary with attenuation settings		EXA specifications vary with frequency range	
Attenuator setting		Frequency range	Typical numbers
0 to 5 dB	±0.3 dB	9 kHz to 3.6 GHz	±0.3 dB
10 dB	Reference	3.5 to 7.0 GHz	±0.5 dB
15 to 60 dB	±(0.1 dB + 0.01 x attenuator setting)	6.9 to 13.6 GHz	±0.7 dB
		13.5 to 26.5 GHz	±0.7 dB
<b>Frequency response (10 dB input attenuation)</b>			
100 Hz to 9 kHz <sup>a</sup>	±0.5 dB	100 Hz to 9 kHz	NA
9 kHz to 3 GHz	±0.46 dB ±0.5 dB (Option UKB)	9 kHz to 10 MHz	±0.8 dB
		10 to 3.6 MHz	±0.6 dB
3 to 6.7 GHz	±1.5 dB	3.5 to 7.0 GHz	±2.0 dB
6.7 to 13.2 GHz	±2 dB	6.9 to 13.6 GHz	±2.5 dB
13.2 to 26.5 GHz	±2 dB	13.5 to 22.0 GHz	±3.0 dB
		22.0 to 26.5 GHz	±3.2 dB
<b>Absolute amplitude accuracy</b>			
At reference settings <sup>b</sup>	±0.34 dB, ±0.13 dB	At reference setting, 50 MHz	±0.40 dB
Preamp on	±0.37 dB, ±0.14 dB	Preamp on (100 kHz to 3.6 GHz)	±(0.39 dB + frequency response)
Overall amplitude accuracy <sup>c</sup>	±(0.54 dB + absolute frequency response)	At all frequencies	±(0.40 dB + frequency response)
95% confidence <sup>d</sup>	±0.4 dB (95%)	9 kHz to 3.6 GHz (95% confidence)	±0.30 dB

a. Custom path, Option UKB typical.

b. Settings are: reference level -25 dBm; (75 Ω reference level +28.75 dBmV); input attenuation 10 dB; center frequency 50 MHz; RBW 1 kHz; VBW 1 kHz; amplitude scale linear or log; span 2 kHz; frequency scale linear; sweep time coupled, sample detector, signal at reference level.

c. For reference level 0 to -50 dBm; input attenuation 10 dB; RBW 1 kHz; VBW 1 kHz; amplitude scale log, log range 0 to -50 dB from reference level; frequency scale linear; sweep time coupled; signal input 0 to -50 dBm; span ≤ 20 kHz (20 to 30 °C).

d. Input frequency < 3GHz; -50 dBm ≤ input power ≤ 0 dBm; -50 dBm ≤ reference level ≤ 0 dBm; -20 dB ≤ input power - reference level ≤ 0 dB; input attenuation = 10 dB; 10 Hz ≤ RBW ≤ 1 MHz (20 to 30 °C). Computed from the observation of a statistically significant number of instruments. Observations of the 50 MHz amplitude accuracy, a component of the computation of this number is performed immediately after invoking RF and IF alignments to minimize the effects of alignment drifts.

## Amplitude Specifications (continued)

	ESA spectrum analyzer	EXA signal analyzer
	Express analyzer or custom analyzer configuration	All frequency ranges
<b>Display scale fidelity</b> <i>Typical values shown in italic</i>		
> 0 to 10 dB	$\pm 0.3$ dB, $\pm 0.08$ dB	$\pm 0.15$ dB
> 10 to 20 dB	$\pm 0.4$ dB, $\pm 0.09$ dB	
> 20 to 30 dB	$\pm 0.5$ dB, $\pm 0.1$ dB	
> 30 to 40 dB	$\pm 0.6$ dB, $\pm 0.23$ dB	
> 40 to 50 dB	$\pm 0.7$ dB, $\pm 0.35$ dB	
> 50 to 60 dB	$\pm 0.7$ dB, $\pm 0.35$ dB	
> 60 to 70 dB	$\pm 0.8$ dB, $\pm 0.39$ dB	
> 70 to 80 dB	$\pm 0.8$ dB, $\pm 0.46$ dB	
> 80 to 85 dB	$\pm 1.15$ dB, $\pm 0.79$ dB	NA
<b>Residual responses (input terminated and 0 dB attenuation)</b>		
50 $\Omega$ RF input impedance		
150 kHz to 1.5 GHz/6.7 GHz <sup>a</sup>	< -90 dBm	
200 kHz to 8.4 GHz (swept)		-100 dBm

a. Up to 1.5 GHz for E4402B. Up to 6.7 GHz for E4404B/05B/07B.

# Tracking Generator

In order to gain tracking generator functionality, Option 1DN or express analyzer Option STG must be ordered with an ESA-E spectrum analyzer. Tracking generator functionality is not available on the EXA signal analyzer.

► For other low cost tracking generator alternatives to the ESA spectrum analyzer customers should consider one of the following instruments:

- N9340A handheld RF spectrum analyzer
- N9320B RF spectrum analyzer
- N1996A CSA spectrum analyzer

Tracking generator specifications (Options 1DN and STG)	
	E4402B/04B/05B/07B
Frequency range	9 kHz to 3.0 GHz
RBW range	1 kHz to 5 MHz
Output power level range	-2 to -66 dBm
Output vernier range	8 dB
Output attenuator range	0 to 56 dB, 8 dB steps
<b>Output flatness</b>	
9 kHz to 10 MHz	±3.0 dB
10 MHz to 3.0 GHz	±2.0 dB
<b>Effective source match (characteristic)</b>	
	< 2.0:1 (0 dB attenuator)
	< 1.5:1 (8 dB attenuator)
<b>Spurious output</b>	
20 kHz to 3 GHz (-1 dBm output)	< -25 dBc
<b>Non-harmonic spurs</b>	
9 kHz to 2 GHz	< -27 dBc
2 to 3 GHz	< -23 dBc
<b>Dynamic range</b>	Maximum output power - displayed average noise level
Output power sweep range	(-10 to -2 dBm) - (source attenuator setting)

## Quasi-Peak Detector

Add a quasi-peak detector, Option AYQ, to the ESA-E custom analyzer configuration. Option AYQ also includes FM demodulation capability. The quasi-peak detector displays the quasi-peak amplitude of a pulse radio frequency on continuous wave signals. Amplitude response conforms to Publication 16 of the Comité International Spécial des Perturbations Radioélectrique (CISPR) Section 1, Clause 2, as indicated in the relative quasi-peak response table.

► The EXA signal analyzer gains quasi-peak functionality with Option EMC. For more information refer to the EXA Specification Guide literature number: N9010-90012.

ESA Custom configuration with Option AYQ (requires Option 1DR)			
Relative quasi-peak response to a CISPR pulse (dB)			
Pulse repetition frequency (Hz)	120 kHz EMI BW 0.03 to 1 GHz	9 kHz EMI BW 0.150 to 30 MHz	200 Hz EMI BW 9 to 150 kHz
1000	+8.0 ±1.0	+4.5 ±1.0	NA
100	0 dB reference <sup>a</sup>	0 dB reference <sup>a</sup>	+4.0 ±1.0
60	NA	NA	+3.0 ±1.0
25	NA	NA	0 dB reference <sup>a</sup>
20	-9.0 ±1.0	-6.5 ±1.0	NA
10	-14 ±1.5	-10.0 ±1.5	-4.0 ±1.0
5	NA	NA	-7.5 ±1.5
2	-26 ±2.0	-20.5 ±2.0	-13.0 ±2.0
1	NA	-22.5 ±2.0	-17.0 ±2.0
Isolated pulse	NA	-23.5 ±2.0	-19.0 ±2.0

a. Reference pulse amplitude accuracy relative a 66  $\mu$ V CW signal < 1.5 dB as specified in CISPR Pub 16  
CISPR reference pulse: 0.44  $\mu$ Vs for 30 MHz to 1 GHz, 0.316  $\mu$ Vs for 150 kHz to 30 MHz, 13.5  $\mu$ Vs for 9 kHz to 150 kHz.



## General Specifications

	ESA-E spectrum analyzer E4402B/E4404B/E4405B/E4407B	EXA signal analyzer All frequency ranges
<b>Temperature range</b>		
Operating	0 to +55 °C	5 to +55 °C
Storage	-40 to +75 °C	-40 to +65 °C
Disk drive	10 to +40 °C	NA
<b>EMI compatibility</b>		
	Conducted and radiated interference is in compliance with CISPR Pub. 11/1990 Group 1 Class A. Conducted and radiated interference is in compliance with CISPR Pub. 11/1990 Group 1 Class Ba (Option 060)	Complies with European EMC Directive 89/336/EEC, amended by 93/68/EEC, IEC/EN 61326, CISPR Pub 11 Group 1, Class A. As/NZS CISPR 11:2002, ICES/NMB-001
<b>Military specifications</b>		
	Type tested to the environmental specifications of MIL-PRF-28800F Class 3	Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3
<b>Power requirements</b>		
	Type tested to the environmental specifications of MIL-PRF-28800F Class 3	Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3
AC operation on (line  )	195 to 250 V rms, 47 to 66 Hz Power consumption < 300 W	90 to 132 V, 47 to 440 Hz (nominal) Power consumption 390 W (fully loaded with options)
Standby (line )	Power consumption < 5 W	Power consumption < 20 W
DC operation	12 to 20 Vdc, < 200 W power consumption	NA
<b>Data storage (nominal)</b>		
Internal <sup>b</sup>	200 traces or states/8.0 MB	
External	3.5" in, 1.44 MB, MS-DOS	40 GB (nominal) Supports USB 2.0-compatible memory device
<b>Memory usage (nominal)</b>		
State	16 kB <sup>c</sup>	
State plus 401- point trace	20 kB <sup>c</sup>	
Display resolution <sup>d</sup>	640 x 480	1024 x 768

a. Meeting Class A performance during DC operation.

b. For serial numbers < US414400 or MY41440000, 1 MB without Option B72, 8 Mb with Option B72.

c. 401 sweep points. The size of a state will increase depending on the installed application(s).

d. The ESA-E LCD display is manufactured using high precision technology. However, there may be up to six bright points (white, blue, red or green in color) that constantly appear on the LCD screen. These points are normal in the manufacturing process and do not affect the measurement integrity of the product in any way.

## General Specifications

(continued)

	ESA-E spectrum analyzer	EXA signal analyzer	
<b>Inputs/Outputs</b>			
<b>Front panel</b>			
Input RF out	50 $\Omega$ type N (f) 50 $\Omega$ APC 3.5 (m) (Option BAB)	50 $\Omega$ type N (f)	
Probe power	+ 15 Vdc, -12.6 Vdc at 150 mA maximum (characteristic/nominal)	+ 15 Vdc, -12.6 Vdc at 150 mA maximum (characteristic/nominal)	
External keyboard	6-pin mini-DIN, PC keyboards (for entering screen titles and file names)	Compatible with USB 2.0	
<b>Rear panel</b>			
10 MHz REF OUT	50 $\Omega$ BNC (f), > 0 dBm (characteristic)	50 $\Omega$ BNC (f), nominal	
10 MHz REF IN	50 $\Omega$ BNC (f), -15 to +10 dBm (characteristic)	50 $\Omega$ BNC (f), nominal	
GATE TRIG/EXT TRIG IN	BNC (f), 5 V TTL	BNC (f), 5 V TTL	
GATE /HI SWP OUT	BNC (f), 5 V TTL	NA	
VGA OUTPUT	VGA compatible monitor, 15-pin mini D-SUB	VGA compatible monitor, 15-pin mini D-SUB	
<b>Interfaces</b>			
GPIB interface IEEE-488 bus connector	Option A4H	Standard	
Serial interface	Option 1AX, RS-232, 9-pin D-SUB (m)	Option 1AX, RS-232, 9-pin D-SUB (m)	
Parallel interface	Option A4H or 1AX 25-pin D-SUB (f) printer port only	NA	
<b>I/O connectivity software</b>			
	IO Libraries Suite ( <a href="http://www.agilent.com/find/iosuite">www.agilent.com/find/iosuite</a> )	IO Libraries Suite ( <a href="http://www.agilent.com/find/iosuite">www.agilent.com/find/iosuite</a> )	
<b>Dimensions</b>			
Width to outside of instrument handle	416 mm (16.4 in)	426 mm (16.8 in)	
Overall height	222 mm (8.75 in)	177 mm (7.0 in)	
Depth from front frame to rear frame	409 mm (16.1 in)	368 mm (14.5 in)	
<b>Weight</b>			
	E4402B	E4404B/E4405B/ E4407B	All EXA signal analyzers
Instrument	15.5 kg (34.2 lbs)	17.1 kg (37.7 lbs)	16 kg (35 lbs) nominal
Shipping	27.4 kg (60.4 lbs)	31.9 kg (70.3 lbs)	28 kg (62 lbs) nominal



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.



### www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)  
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

## For More Information

For the latest information on the Agilent ESA-E Series see our Web page at:

[www.agilent.com/find/esa](http://www.agilent.com/find/esa)

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment through-out its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

[www.agilent.com](http://www.agilent.com)  
[www.agilent.com/find/esa](http://www.agilent.com/find/esa)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

### Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201
Other European Countries:	
	<a href="http://www.agilent.com/find/contactus">www.agilent.com/find/contactus</a>

Revised: October 1, 2009

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2009  
Printed in USA, November 12, 2009  
5989-9815EN



# Agilent Technologies



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)