



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Power cables for EM18, 28 and XDS35i pumps, 1 phase

Pump end connector is IEC60320 C19.

1

PAGE
24

ORDERING INFORMATION

PRODUCT DESCRIPTION	ORDERING NUMBER
UK, three pin plug, 2 m	A50505003
North European plug, 2 m	A50506003
North America/Japan plug, 2 m	A50507003
No plug, 2 m	A50508003

FL20K FORELINE TRAP




The FL20K foreline trap has been developed for use in clean pumping systems, to prevent the back-migration of rotary pump oil mist into the system. The activated alumina sorbent has the following benefits:

- Exceptional trapping properties for oil mist (99.7%)
- A very long life before it is saturated
- Can be rejuvenated by baking the basket containing the sorbent for 2 hours at 250 °C – 300 °C.

The FL20K is most useful with two-stage rotary pumps, operating below 1 mbar. To maximize sorbent life, install the FL20K near the vacuum system. In common with other types of sorbent, activated alumina absorbs water. This does not affect the oil vapor trapping properties but may tend to prolong the roughing time on successive pump downs. To minimize vapor absorption, we recommend you fit a valved by-pass line.

The trap body is made of aluminum and is fitted with a removable basket containing the sorbent.

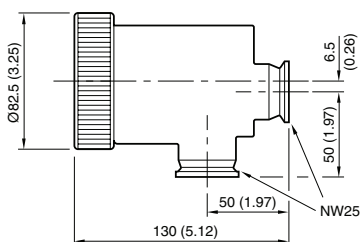

ORDERING INFORMATION


PRODUCT DESCRIPTION	ORDERING NUMBER
FL20K foreline trap (Supplied with 0.2 kg sorbent charge)	A13305000
Sorbent charge 0.1 kg, weight 1.0 kg	
By-pass valve	C07902000
SPARES	ORDERING NUMBER
0.45 kg activated alumina	H02600050
0.2 kg activated alumina	H02600056

VIBRATION ISOLATORS


You may need to fit vibration isolators to your pump if you mount it into a frame or a system, if the mounting points are not level or if you need to minimize the transmission of vibration and noise in your application. You must fit flexible bellows or other flexible pipes to the pump inlet and outlet.

The height of the isolators reduces by about 1 mm when the pump is fitted.


SPEEDIVAC 2



E2M0.7, E2M1.5

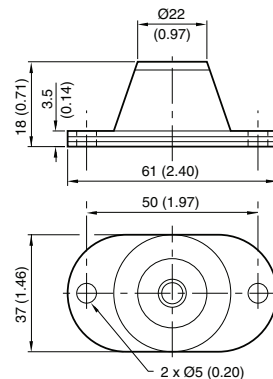

RV pumps, E1M18/E2M18, E2M28, XD5/10 and XDS35i

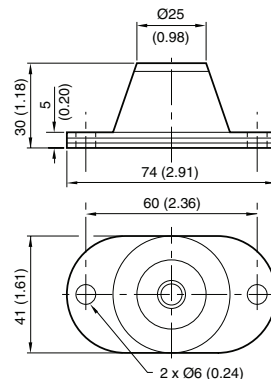

ORDERING INFORMATION

PRODUCT DESCRIPTION	ORDERING NUMBER
Vibration isolators	
Speedivac 2 (0.1 kg)	A24801403
E2M0.7, E2M1.5 (0.3 kg)	A24801407
RV, E1M/E2M18, XDS (0.45 kg)	A24801404
E2M28 (0.45 kg)	A24801412
XDS35i (0.45 kg)	A24801408



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com