

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

HAMAMATSU

PHOTOMULTIPLIER TUBE R943-02

GaAs (Cs) Photocathode, Wide Spectral Response, 51 mm (2") Diameter Head-on Type for Photon Counting, Low Dark Counts, Excellent P.H.D.

FEATURES

- **Wide Spectral Response ..... 160 nm to 930 nm**
- **High Quantum Efficiency in Near IR ... 14 % at 632.8 nm**
- **Fast Rise Time ..... 3.0 ns at 1500 V**
- **Excellent Single Photoelectron Pulse Height Distribution ..... Peak to Valley Ratio 2.3 (at -20 °C)**
- **Low Dark Counts ..... 20 s^{-1} Typ. (at -20 °C)**



APPLICATIONS


- **Raman Spectroscopy**
- **Fluorescent Spectroscopy**
- **Astrophysical Measurement**
- **Laser Detection**

Hamamatsu R943-02 is a 51 mm (2") diameter head-on type photomultiplier tube having GaAs (Cs) photocathode and synthetic silica window. The combination of the GaAs photocathode and the synthetic silica window allows high sensitivity over a wide spectral range from UV to IR (160 nm to 930 nm).
The R943-02 is selected for photon counting and features low dark counts and excellent pulse height distribution (PHD) of single photoelectrons.

GENERAL

Parameter	Description / Value	Unit
Spectral Response	160 to 930	nm
Wavelength of Maximum Response	300 to 850	nm
Photocathode		
Material	GaAs(Cs)	—
Minimum Effective Area	10 × 10	mm
Mode	Opaque	—
Window Material	Synthetic silica glass	—
Dynode		
Secondary Emitting Surface	Cu-BeO	—
Structure	Linear focused	—
Number of Stages	10	—
Direct Interelectrode Capacitances		
Anode to Last Dynode	Approx. 2.7	pF
Anode to All Other Electrodes	Approx. 5.0	pF
Base	21-pin glass base	—
Suitable Socket	E678–21C (supplied) E678–21D (sold separately)	—
Weight	93	g
Operating Ambient Temperature Ⓐ	-30 to +50	°C
Storage Temperature	-80 to +50	°C

Figure 1: Typical Spectral Response

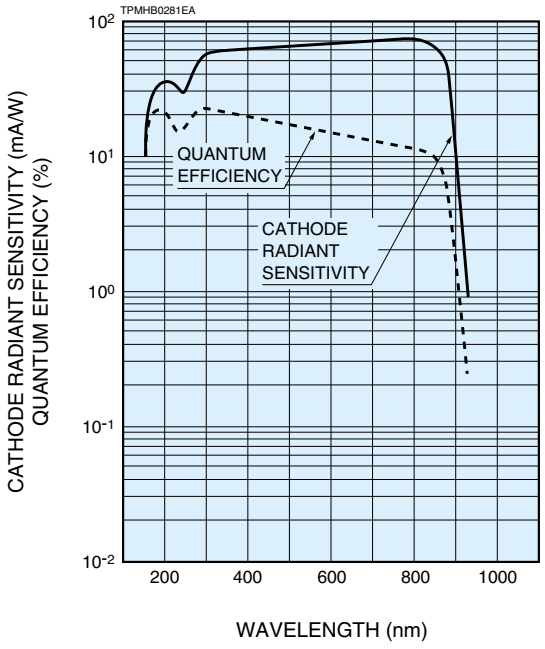

Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2003 Hamamatsu Photonics K.K.

PHOTOMULTIPLIER TUBE R943-02

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter	Value	Unit
Supply Voltage		
Between Anode and Cathode	2200	V
Between Anode and Last Dynode	250	V
Average Anode Current Ⓑ	1	μA
Average Pulse Count Rate Ⓒ	6×10^6	s^{-1}
Average Cathode Current Ⓓ	1	nA

CHARACTERISTICS (at 25 °C)

Parameter	Min.	Typ.	Max.	Unit
Cathode Sensitivity Ⓔ				
Quantum Efficiency				
at 253.7 nm (Hg-Line)	—	15	—	%
at 632.8 nm (He-Ne Laser)	—	14	—	%
Luminous Ⓕ	300	600	—	μA/lm
Radiant at 253.7 nm (Hg-Line)	—	30	—	mA/W
at 632.8 nm (He-Ne Laser)	—	70	—	mA/W
at 700 nm	—	71	—	mA/W
at 852.1 nm (Cs-Line)	—	65	—	mA/W
Red/White Ratio Ⓖ	—	0.58	—	
Anode Sensitivity Ⓗ				
Luminous Ⓕ	150	300	—	A/lm
Radiant at 253.7 nm (Hg-Line)	—	1.5×10^4	—	A/W
at 632.8 nm (He-Ne Laser)	—	3.5×10^4	—	A/W
at 700 nm	—	3.6×10^4	—	A/W
at 852.1 nm (Cs-Line)	—	3.3×10^4	—	A/W
Gain Ⓗ	—	5×10^5	—	—
Equivalent Anode Dark Current Ⓙ	—	1	10	nA
Anode Dark Counts Ⓚ	—	20	50	s^{-1}
Single Photoelectron PHD (Peak to Valley Ratio)	—	2.3	—	—
Time Response Ⓗ				
Anode Pulse Rise Time Ⓛ	—	3.0	—	ns
Electron Transit Time Ⓜ	—	23	—	ns

NOTES

Ⓐ For cooling operation, another ceramic socket, type number E678-21D is recommended, because the teflon socket type number E678-21C supplied with the tube is not suitable for cooling operation due to its high thermal expansion coefficient. Alternatively, it is recommended to solder a resistor, capacitor, etc. directly on stem pins using a socket contact (100-2520S) supplied by Winchester.

Ⓑ Averaged over any interval of 30 seconds maximum.

Ⓒ Measured at single photoelectron level. The discriminator level is set at valley point.

Ⓓ In practical operation, the cathode current should be lower than 0.1 nA to prevent shortening the life of the photocathode.

Ⓔ Supply voltage is 150 volts between the cathode and all other electrodes.

Ⓕ The light source is a tungsten filament lamp operated at a distribution temperature of 2856 K.

Ⓖ The quotient of the cathode sensitivity measured with the light source is the same as Note Ⓔ passing through a red filter (Toshiba R-68) divided by the cathode luminous sensitivity without the red filter.

Ⓗ Measured with supply voltage and voltage distribution ratio in Table 1.

Ⓙ Measured with supply voltage to provide the anode luminous sensitivity of 200 (A/lm) and the voltage distribution ratio in Table 1 after 30 minute storage in the darkness.

Ⓚ Measured with supply voltage that gives 2×10^6 gain and with the voltage distribution ratio shown in Table 1 after one hour storage in the cooler set at -20 °C.
The discriminator is set at 1/3 of a single photoelectron level.

Ⓛ The rise time is the time it takes the output pulse to rise from 10 % to 90 % of the peak amplitude when the entire photocathode is illuminated by a delta function light pulse.

Ⓜ The electron transit time is the interval between the arrival of a delta function light pulse at the entrance window of the tube and the time when the output pulse reaches the peak amplitude. In measurement the entire photocathode is illuminated.

Table 1: Voltage Distribution Ratio

Electrode	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
Distribution Ratio	3	1.5	1	1	1	1	1	1	1	1	1	

Supply Voltage : 1500 V, K : Cathode, Dy : Dynode, P : Anode

Replacement Information

The R943-02 is similar to the Burle C31034 series photomultiplier tube. The base and voltage divider are different.

Warning–Personal Safety Hazards
Electrical Shock — Operating voltages applied to this device present a shock hazard.

Figure 2: Typical Single Photoelectron Pulse Height Distribution

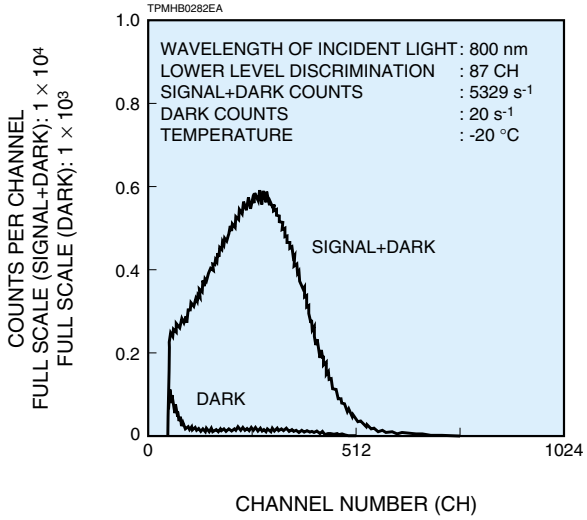


Figure 3: Typical Gain

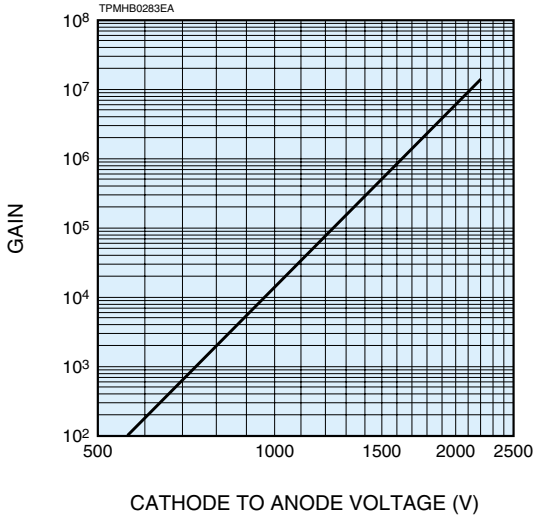


Figure 4: Typical Time Response

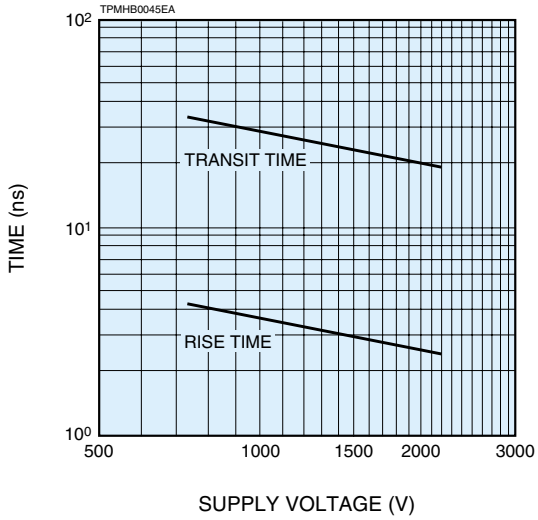


Figure 5: Typical Temperature Coefficient of Quantum Efficiency


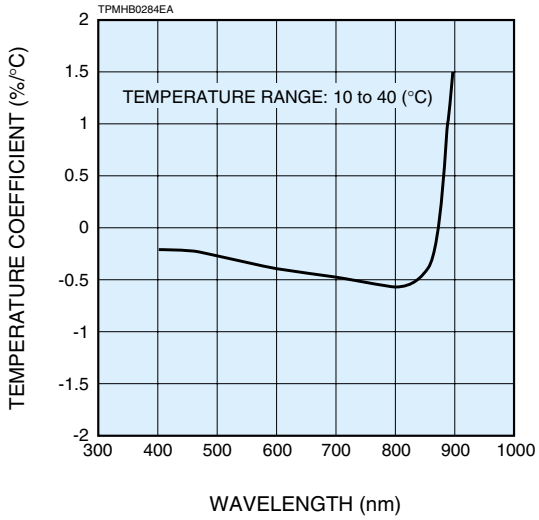


Figure 6: Typical Dark Counts vs. Temperature

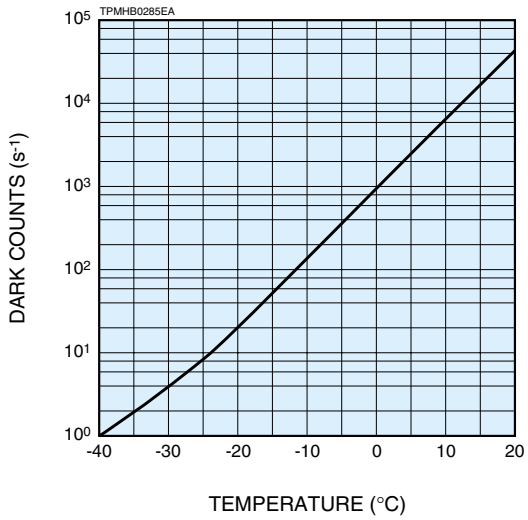


COOLING

As Figure 6 shows, the dark counts of the R943-02 decreases by cooling the tube. Therefore, when performing photon counting, it is recommended that the tube be cooled down to about -20 °C. The cooler C4877 which features temperature control from -30 °C to 0 °C is available from HAMAMATSU.

PHOTOMULTIPLIER TUBE R943-02


Figure 7: Dimensional Outline and Basing Diagram (Unit: mm)

a)

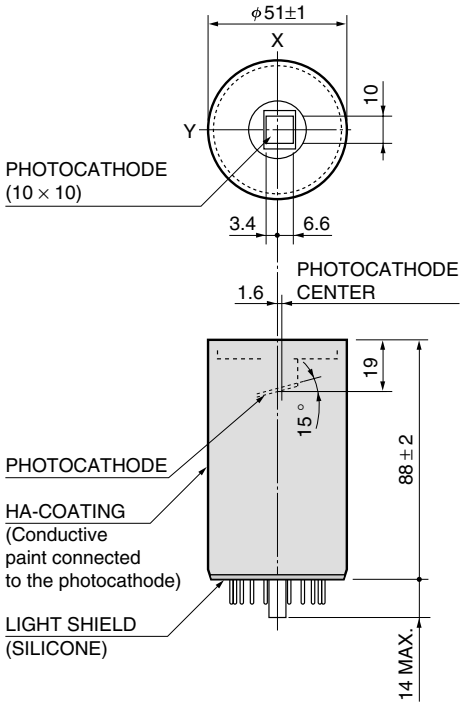

TPMHA0286EA

Orientation of Photocathode with respect to base pin

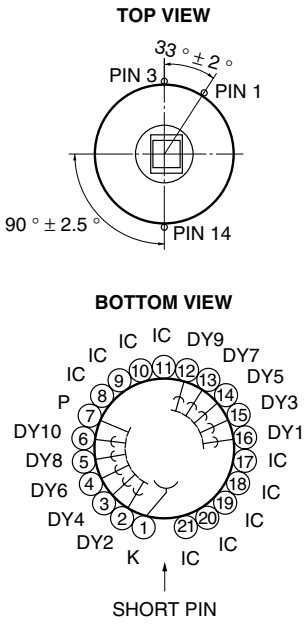


Dy: Dynode
K : Photocathode
P : Anode
IC : Internal Connection
(should not be used)


TPMHA0022EB

b) PHOTOCATHODE

X Axis Cross Section

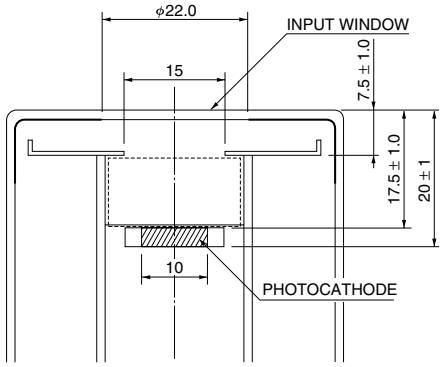


Y Axis Cross Section

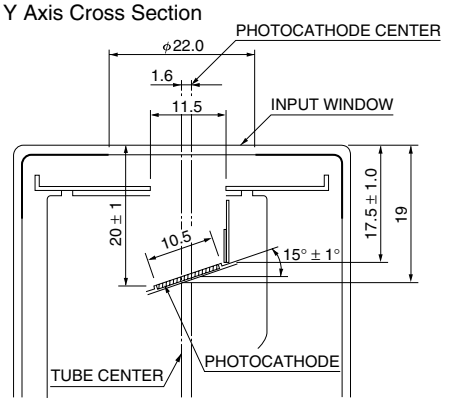

TPMHA0023EB


c) SOCKET(Refer to NOTES Ⓐ)

E678–21C (Supplied)

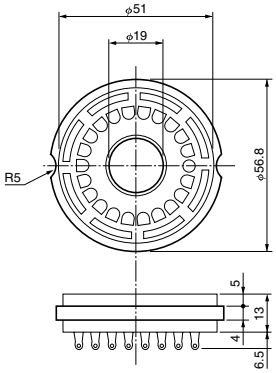

TACCA0066EC

E678–21D (Sold separately)

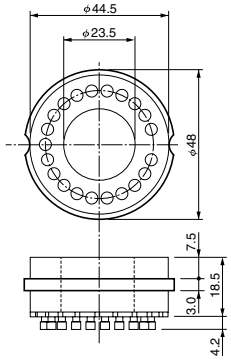

TACCA0054EB

REMARKS

- HA coating
  The R943-02 is coated with the conductive paint connected to the cathode, which is covered with an insulating material (HA coating). This method decreases noise. Care should be taken not to damage the insulating cover wrapping around the bulb.

CAUTIONS

- Use the HAMAMATSU SOCKET E678-21C or E678-21D. See "NOTES" Ⓐ for cooling.
- When soldering the voltage dividers to the socket, the PMT should be inserted in the socket.
- Helium will permeate through the silica bulb, leading to an increase in noise. Avoid operating or storing tubes in an environment where helium is present.
- As the R943-02 has a synthetic silica window, a very thin graded sealing structure is used in the bulb wall. Although it is covered with an insulating cover, extreme care should be taken in handling.

HAMAMATSU WEB SITE http://www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Center
314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater. N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: info@hamamatsu.de
France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr
United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: info@hamamatsu.co.uk
North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se
Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: info@hamamatsu.it

TPMH1115E06
MAY 2003

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP