ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Honeywell / Sensotec DV-10* at our website: ***Click HERE***

Honeywell

Model DV-10 DIN

Rail Mount In-Line Amplifier



DESCRIPTION

These in-line amplifiers feature DIN-rail mount enclosures with front accessible electrical connections and adjustments. Amplifiers are available for strain-gage transducers.

FEATURES

- DIN rail mount
- Unamplified transducer input
- Bridge-based transducer input
- 0 to ±10 V three-wire output with 15 Vdc to 28 Vdc power
- 5.4 Vdc or 9 Vdc excitation @ 30 mA
- RFI, ESD protected
- CE approved

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Model DV-10 DIN

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Number of channels	1
Case material	Plastic
Mounting	35 mm DIN
Certification	CE approved

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-29 °C to 82 °C [-20 °F to 180 °F]
Temperature, storage	-40 °C to 93 °C [-40 °F to 200 °F]

TRANSDUCER INTERFACE

Characteristic	Measure
Transducer type	Bridge-based sensor
Transducer excitation	5.4 Vdc or 9 Vdc @ 30 mA (short circuit protection)

AMPLIFIER CHARACTERISTICS


Characteristic	Measure
Supply voltage	15 Vdc to 28 Vdc
Current draw	60 mA
Zero adjustment range, coarse	±30 %
Zero adjustment range, fine	±5 %
Span adjustment range	Switch selectable 1.75 mV/V to 13.3 mV/V
Span adjustment range, fine	-8 to +20
Linearity	±0.01 %
Output	±10 Vdc (three-wire)
Output current	2 mA
Frequency response	dc -5000 Hz

Not RoHS compliant


OPTION CODES

2-pole filter option	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.
58e, 2-pole filter setting	1 Hz 3 Hz 5 Hz 10 Hz 20 Hz 30 Hz 50 Hz 100 Hz 300 Hz 500 Hz 1000 Hz 2500 Hz (350 ohm bridge) 7000 Hz (5000 ohm bridge)

MOUNTING DIMENSIONS AND CHARACTERISTICS

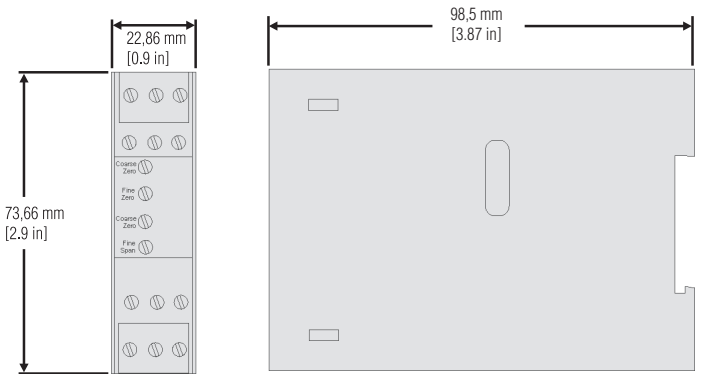

TYPICAL SYSTEM DIAGRAM

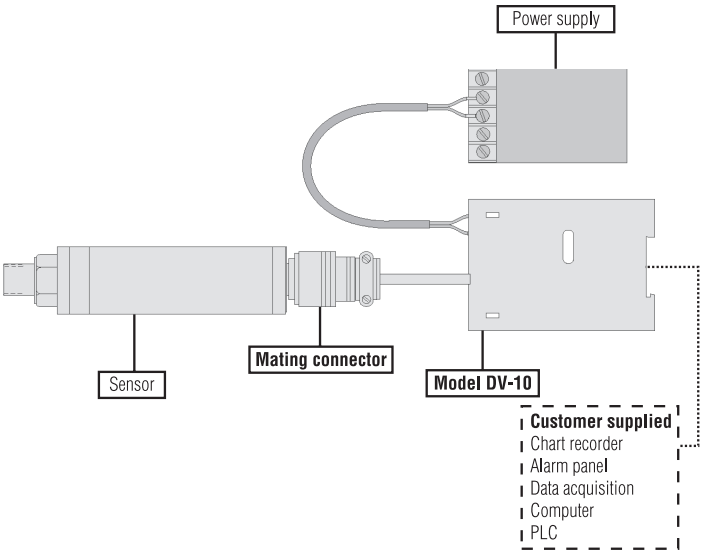

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Model DV-10 DIN

Rail Mount In-Line Amplifier

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847
Email inquiries to info.sc@honeywell.com

⚠ WARNING

PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING

MISUSE OF DOCUMENTATION

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847
www.honeywell.com/sensing

Honeywell

008814-1-EN IL50 GLO
June 2008
Copyright © 2008 Honeywell International Inc. All rights reserved.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP