

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*



mks

Valve Solutions

WWW.MKSINST.COM

Type 649A

ELECTRONIC PRESSURE CONTROLLER WITH MASS-FLO® METER

The MKS Type 649 is a single instrument that provides both pressure control and flow metering. The Type 649 replaces multiple component subassemblies, for example pressure controllers with separate flow meters used in applications such as backside wafer cooling systems (BWCS). The compact Type 649 design allows for significant reduction in BWCS size and complexity.

The 649 Series Pressure Controller contains a capacitance manometer, mass flow meter, normally-closed proportioning control valve, and closed-loop control electronics. The Type 649 controls absolute pressure. The pressure transducer is a Baratron® Capacitance Manometer, with Full Scale pressure ranges from 10 Torr to 1000 Torr. Baratron Capacitance Manometers – well-known for their percent of Reading accuracy, stability, and resolution – provide precise measurements at lower pressures and over wider dynamic ranges than strain gage transducers. The patented mass flow sensor provides exceptional zero stability and accuracy of flow measurement. Full Scale ranges from 10 sccm to 5000 sccm nitrogen equivalent are available.

The 649 is powered by ±15 VDC at only 300 mA. The pressure output and input control signals are 0-10 VDC. Two trip points are included in the 649, with LED status indicators, for use as simple on/off process limits. The 649's control loop tuning parameters are preset for typical installation conditions, but are field adjustable for different conditions and optimum performance. The Proportional and Integral Term adjustments are simple rotary switches, providing a wide dynamic control range.

In the Type 649, a pressure transducer monitors the pressure to be controlled at the downstream end of the controller. Actual pressure is compared in the electronics to the pressure set point signal. An appropriate signal is then generated to adjust the proportioning control valve to bring actual pressure into agreement with the desired set point. The internal control valve can be specified with one of four orifices allowing pressure control in systems with Full Scale flows from 10 sccm to 5 slm.

Features & Benefits

Designed For The Most Demanding Processes

- Backside wafer cooling
- Fast response to set point with minimal overshoot
- Metal-sealed, cleanroom manufactured units meet critical high purity application needs

Reliable, Rugged, Repeatable

- Integral Baratron® Capacitance Manometer provides accuracy, reliability, and wide range
- Patented mass flow sensor* provides exceptional long-term accuracy and zero stability

Easily Integrated

- Integral pressure measurement and control with flow metering in a single package requires less space and reduces system cost
- Two alarm trip points for process limit control
- CE Mark compliant meets requirements for European Union

US Patent 5461913. Foreign patent pending.

Pressure Range

In the Type 649 Controller, the Baratron® Pressure Transducer measures absolute pressure. Full Scale ranges of 10, 100, or 1000 Torr are available. Each 649 can control pressure from Full Scale to less than 2% of Full Scale. Prudent design suggests choosing the lowest possible Full Scale for the application, taking into consideration the overpressure to which the sensor may be exposed (both normal and accidental).

Valve Orifice

The flow through any orifice depends on the size of the orifice, the inlet and outlet pressures, and gas density. To simplify 649 orifice selection, use the following procedure:

1. On the Index Number Table in Figure 1, choose your inlet pressure from the column of pressures on the left–the pressure that will be applied to the inlet of your 649. (Note that the values are absolute pressure.)

   Next, from the row of pressures at the top of that table, select your differential (delta) pressure – this is the inlet pressure minus your outlet pressure.

   Locate the Index Number – where your selected row and column intersect.
2. If you are using N_2, skip to step #3.
   For other gases, calculate the Density Correction Factor by the following formula:

   Multiply this Density Correction Factor times the Index Number found in step 3, to determine your density-corrected Index Number.
3. Go to the Orifice Selection Graph (Figure 2) and locate your Index Number along the bottom axis.

   Draw a vertical line at your Index Number. This line will intersect with the Max. Flow Rate lines for available valve orifices.

   Choose the orifice whose maximum flow rate exceeds your requirements.

Flow Metering

The flow meter is simply sized.

1. Determine Full Scale flow rate and gas.
   If gas is N_2, skip to #3.
2. Divide the Full Scale flow rate by the thermal gas correction factor[1] of the gas of choice relative to configuration.
3. Choose the flow rate whose flow just exceeds/equals the equivalent N_2 requirement.

[1] Contact MKS Applications Engineering for gas correction factor.

Note: The above procedure is provided as a reference guide to sizing the orifice for most typical applications. To assure proper orifice size selection for the specific application conditions, particularly those where the procedure results in an orifice selection near the limit lines in the graph, please contact our Applications Engineers for assistance in selecting the proper valve orifice.

Inlet Pressure (psia)	Differential Pressure (psi)									Inlet Pressure (Torr)
	>50	50	30	15	8	4	2	1	0.5	
100	>585	585	480	355	265	190	135	95	65	5170
50	–	295	295	240	185	130	95	65	50	2585
30	–	–	175	175	140	100	75	50	40	1551
20	–	–	–	115	110	80	60	40	30	1034
15	–	–	–	90	90	70	50	35	25	776
10	–	–	–	–	60	55	40	30	20	517
5	–	–	–	–	–	30	25	20	15	259
2	–	–	–	–	–	–	10	10	9	103
1	–	–	–	–	–	–	–	6	6	51.7
	>2585	2585	1551	776	414	207	103	51.7	25.9	
	Differential Pressure (Torr)									

Figure 1 — Index Number Table (See Note)

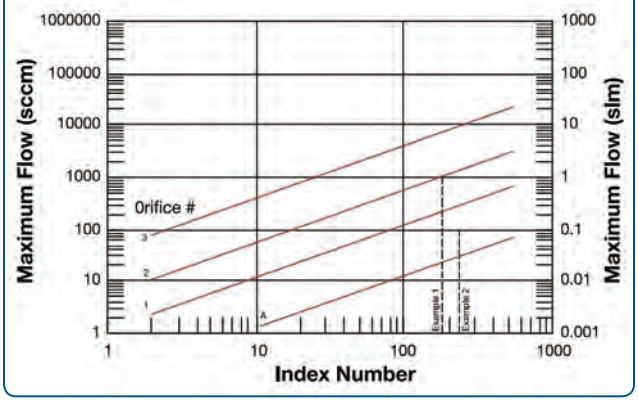


Figure 2 — Orifice Selection Graph (See Note)

Example 1

You want to control your process pressure at 5 psia, with a flow rate of 1000 sccm of N_2. Your inlet pressure is 15 psig, or 30 psia, giving a differential pressure (delta P) of 25 psi. Approximating your delta P as 30 psi gives an Index Number value of 175. Drawing a vertical line on the Orifice Selection Chart at 175 indicates Orifice #3 would be the best choice.

Example 2

You want to control a vacuum process at a pressure of 0.5 psia, with a flow rate of 2000 sccm of He. Your inlet pressure is 15 psia, giving a differential pressure (delta P) of 15 psi, resulting in an uncorrected Index Number value of 90. The gas density correction for He is calculated as N_2 density/He density = 1.250/0.179 = 2.6. Multiplying 2.6 by 90 gives a density-corrected Index Number of 234. Drawing a vertical line on the Orifice Selection Chart at 234 indicates Orifice #2 would be the best choice.


Specifications


Pressure Transducer Type	Type 649
Pressure Ranges (Full Scales)	10, 20, 50, 100, 1000 mmHg (Torr)
Flow Ranges (Full Scales)	10, 20, 50, 100, 200, 500, 1000, 2000, 5000 sccm
Transducer Overpressure Limit	45 psia or 2x F.S., whichever is greater
Orifice Full Scale Ranges	50, 200, 1000, 5000 sccm (nominal F.S. flow rates for N_2 with atm on inlet and vacuum on outlet)
Maximum Differential Pressure	150 psi (consistent with transducer overpressure limit)
Pressure Control Mode	Downstream
Pressure Reading	
Accuracy	±0.5% of Reading (includes linearity, hysteresis, and repeatability)
Temp. Coefficients	Zero: ±0.04% of F.S./°C Span: ±0.04% of Reading/°C
Time Response	<100 msec
Pressure Control	
Range	2 to 100% of F.S.
Accuracy	±0.2% of F.S.
Time Response	1.0 sec (excluding system time constant)
Flow Reading	
Measurement Range	1% to 100% of F.S.
Accuracy (including non-linearity, hysteresis, and non-repeatability referenced to 760 mmHg and 0°C)	±1.0% of F.S.
Repeatability	±0.2% of F.S.
Resolution	0.1% of F.S.
Temperature Coefficients	Zero: < 0.05% of F.S./°C Span: < 0.08% of Rdg./°C
Pressure Coefficient	<0.02% of Rdg./psi
Meter Warm-up Time (w/in 0.2% of F.S. steady state)	<2 min
Meter Response Time	<100 msec
Operating Temperature	0° to 50°C (32° to 122°F)
Storage Temperature	-20° to 80°C (-4° to 176°F)
Power Required	±15 VDC ±5%, 300 mA max.
Input/Output Signals	Pressure: 0-10 VDC, standard (0-5 VDC optional) Flow: 0-5 VDC
Connector	15-pin male Type “D”
Cable Length	100 ft. (30 m) max.
RFI Sensitivity	SAMA 33.1, 1-abc: <0.2% of F.S.
Trip Points	
Pressure	Two open-collector transistors
Rated	250 mA @ 30 VDC
Adjustable	1 to 100% of F.S.
Hysteresis	3% of F.S.
Indicators	Green LED’s on when actuated
Electromagnetic Compatibility	Fully CE Compliant to EMC Directive 2004/108/EC when used with an overall metal braided shielded cable, properly grounded at both ends
Materials Exposed to Gas	
Standard (metal sealed)	316L S.S., 316L/VAR S.S., Inconel®, Nickel
Optional (valve plug)	Viton®, Kalrez®, Kel-F®, or metal
Leak Integrity	
External	< 10^{-9} scc/sec He
Internal (through closed valve)*	Elastomer valve: < 10-3 scc/sec He Kel-F/metal valve: < 2% of F.S. (N_2 @ 25 psig to atm.)
Fittings (compatible with)	Male Swagelok® 4 VCR®, 8 VCR
Dimensions	1.5” (38.1 mm) x 6.66” (169.2 mm) (4 VCR) x 5.50” (140 mm) max.
Weight	3.5 lbs. (1.59 kg)

Note: The 649 Series controllers require flow to operate, but will not control pressure in “dead-ended” (zero flow) applications.

*Type 649 Control Valves should not be used for positive shutoff. Where positive shutoff is required, a separate valve should be installed. When selecting the location of an external shutoff valve, consideration should be given to the maximum pressure rating of the internal transducer and to the possibility that leakage across the internal valve over time can build up and result in a sudden surge of gas.

Ordering Information

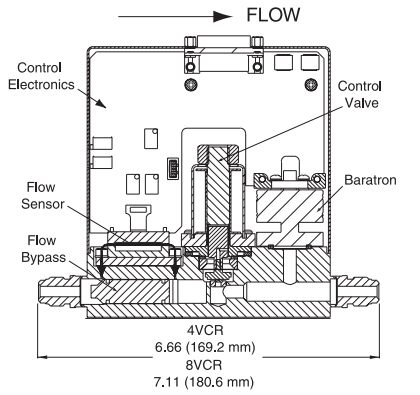

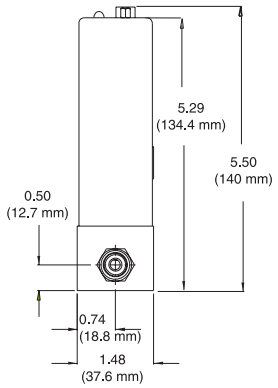

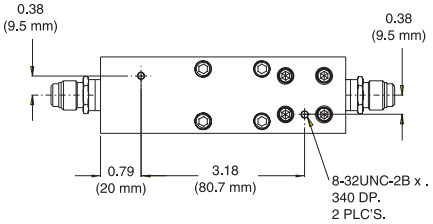


Figure 3 —

Cross section diagram.
Note: unless otherwise specified, dimensions are nominal values in inches (mm referenced).

Ordering Code Example: 649A13T12C2VR	Code	Configuration
Types 649 Electronic Pressure Controller with MFM	649A	649A
Pressure Range Full Scale		
10 Torr (mmHg)	11T	13T
20 Torr (mmHg)	21T	
50 Torr (mmHg)	51T	
100 Torr (mmHg)	12T	
1000 Torr (mmHg)	13T	
Flow Rate		
10 sccm	11C	12C
20 sccm	21C	
50 sccm	51C	
100 sccm	12C	
200 sccm	22C	
500 sccm	52C	
1000 sccm	13C	
2000 sccm	23C	
5000 sccm	53C	
Valve Orifice (nominal F.S. flow range for N_2 at 1 atm. DP)		
A (50 sccm)	A	2
#1 (200 sccm)	1	
#2 (1000 sccm)	2	
#3 (5000 sccm)	3	
Valve Plug Material		
Viton	V	V
Kalrez	D	
Metal*	M	
Kel-F	F	
Fittings (compatible with)		
Swagelok 4 VCR male	R	R
Swagelok 8 VCR male	T	
Optional Accessories		
Type 246 single-channel power supply/readout/set point control		246B
Type 247C four-channel power supply/readout/set point control		247C
Type 649 Y cable		CB649-1-M1

* Metal valve plug available on 200 sccm and larger valve orifice

MKS Instruments, Inc.
Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810

Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc.
Valve Solutions

Six Shattuck Road
Andover, MA 01810

Tel: 978.975.2350

649A - 11/15
© 2003 MKS Instruments, Inc.
All rights reserved.

MKS products provided subject to the US Export Regulations. Diversion or transfer contrary to US law is prohibited.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® and Mass-Flo® are registered trademarks of MKS Instruments, Inc., Andover, MA. Kel-F® is a registered trademark of 3M Company, Minneapolis, MN. Viton® and Kalrez® are registered trademarks of E.I. Dupont Co., Inc., Wilmington, DE. Swagelok® and VCR® are registered trademarks of Swagelok Marketing Co., Solon, OH. Inconel® is a registered trademark of Inco Alloys International, Huntington, WV.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP