

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Newport LTA-HS* at our website: *Click HERE*

Precision Motorized Actuators

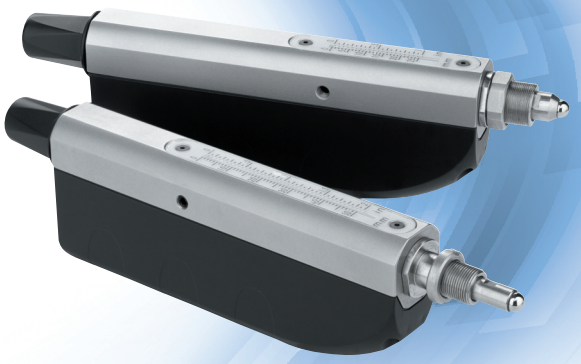

LTA SERIES

LTA actuators are designed to directly replace manual micrometers in existing manual stages and other opto-mechanical components to enable automated motion solutions.

- Robust design for industrial applications
- High load capacity & high speed DC Servo versions
- Vacuum versions with stepper motor & encoder
- Non-rotating tip improves motion smoothness
- Exceptional minimum incremental motion
- Manual positioning knob and scale position indicator

High Speed 50 mm Travel

The LTA-HS features a DC servo motor with optimized output torque for high speed applications. It also offers the longest travel range of all Newport actuators at 50 mm.

120 N High Load Version

The LTA-HL features a DC servo motor with optimized output torque for higher load capacity. It is recommended for heavy load applications which require up to 120 N of axial load capacity.



Vacuum Compatible Versions

The LTA series actuators also come in two standard stepper motor models specifically designed for vacuum applications up to 10-6 hPa and are readily available from stock.

Manual Adjustment Knob with Scale Position Indication

LTA Series motorized actuators feature a manual adjustment knob which permits quick positioning of the actuator when the motor is off. There is also a scale to indicate coarse actuator position in both millimeters and inches.



Non-rotating Actuator Tip

LTA actuators feature a non-rotating tip that prevents wear and eliminates periodic motion variations when the actuator is moving.

Newport®

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Motorize Your Existing Manual Stage

The LTA Series actuator is compatible with most standard Newport manual stages. The -HS version can be used with longer travel manual stages like the 426. For compatible manual positioners from Newport, please check our LTA Compatibility Matrix.

Motorize an Optical Mount

LTA actuators can replace micrometer drives on most Newport optical mounts creating automated solutions for beam control and management. They are shown with our SL51 mirror mount.

DESIGN DETAILS

	LTA-HL & LTA-HS	LTAHLPPV6 & LTAHSPPV6
Base Material	Stainless steel body with polycarbonate cover	Stainless steel body
Drive Mechanism	Non-rotating lead screw	
Drive Screw Pitch (mm)	1.0	
Reduction Gear	HL Version 1:66 HS Version 1:14	– –
Feedback	Motor mounted rotary encoder, 2048 cts/rev.	
Limit Switches	Optical switches, both ends, max. travel limit is adjustable	
Origin	Uses minimum travel limit for homing, typically <4 µm repeatability	
Motor	DC-servo	Stepper
Cable Length	3 m	1.5 m (SUB-D25 connector not vacuum compatible)
Vacuum Compatibility	10^{-6} hPa ($0,7 \times 10^{-7}$ Torr)	
MTBF	10,000 h at 25 N load and a 10% duty cycle	10,000 h at half load and with a 10% duty cycle


SPECIFICATIONS

	LTA-HS	LTA-HL	LTAHSPPV6	LTAHLPPV6
Travel (mm)	50	25	50	25
Minimum Incremental Motion [5] (µm)	0.1	0.05	0.08	0.08
Uni-directional Repeatability, Typical (Guaranteed) (µm)	±0.10 (±0.25)	±0.10 (±0.25)	±0.10 (±0.25)	±0.10 (±0.30)
Bi-directional Repeatability, Typical (Guaranteed) [1] [2] (µm)	±0.30 (± 1.0)	±0.30 (± 1.0)	±0.30 (± 1.0)	±0.30 (± 1.0)
Accuracy [1] (µm)	±2.2 (±5.0)	±1.2 (±3.0)	±2.2 (±5.0)	±1.2 (±3.0)
Maximum Speed (mm/s)	5	1	0.5 [4]	0.25 [4]
Axial Load Capacity [-Cx, +Cx] (N)	-50, +40	-120, +100	40	-100, +100
Side Load Capacity [3] (N)	5	20	5	-40, +40

1) *Shown are peak to peak, guaranteed specifications or ±half the value as sometimes shown. For the definition of typical specifications which are about 2X better than the guaranteed values, visit www.newport.com for the Motion Control Metrology Primer.*
2) *After backlash compensation.*
3) *Avoid side loads during motion.*
4) *With SMC100PP: 0.1 mm/s for LTAHLPPV6, 0.2 mm/s for LTAHSPPV6.*
5) *MIM in closed loop: 0.15 mm for LTAHLPPV6, 0.3 mm for LTAHSPPV6.*


LOAD CHARACTERISTICS AND STIFFNESS

LTA-HS & LTA-HL



		LTA-HS	LTA-HL
-Cx,	Inverse axial load capacity	50 N	120 N
+Cx,	Direct axial load capacity	40 N	100 N

LTA-HSPPV6 & LTA-HLPPV6




		LTAHSPPV6	LTAHLPPV6
+Cx, -Cx,	Axial load capacity	40 N	100 N

RECOMMENDED CONTROLLERS/DRIVERS


Model	Description
XPS-D	1- to 8-axis universal high-performance motion controller/driver
XPS-DRV11	Universal digital driver card for stepper, DC and direct motors
XPS-RL	1- to 4-axis universal high-performance motion controller/driver
XPS-DRV01	PWM drive module for DC brush and stepper motors, 3 A/43 V max.
ESP301	1- to 3-axis motion controller/driver
SMC100CC	Single-axis DC motor controller/driver
SMC100PP	Single-axis stepper motor controller/driver

DIMENSIONS


LTA-HS & LTA-HL

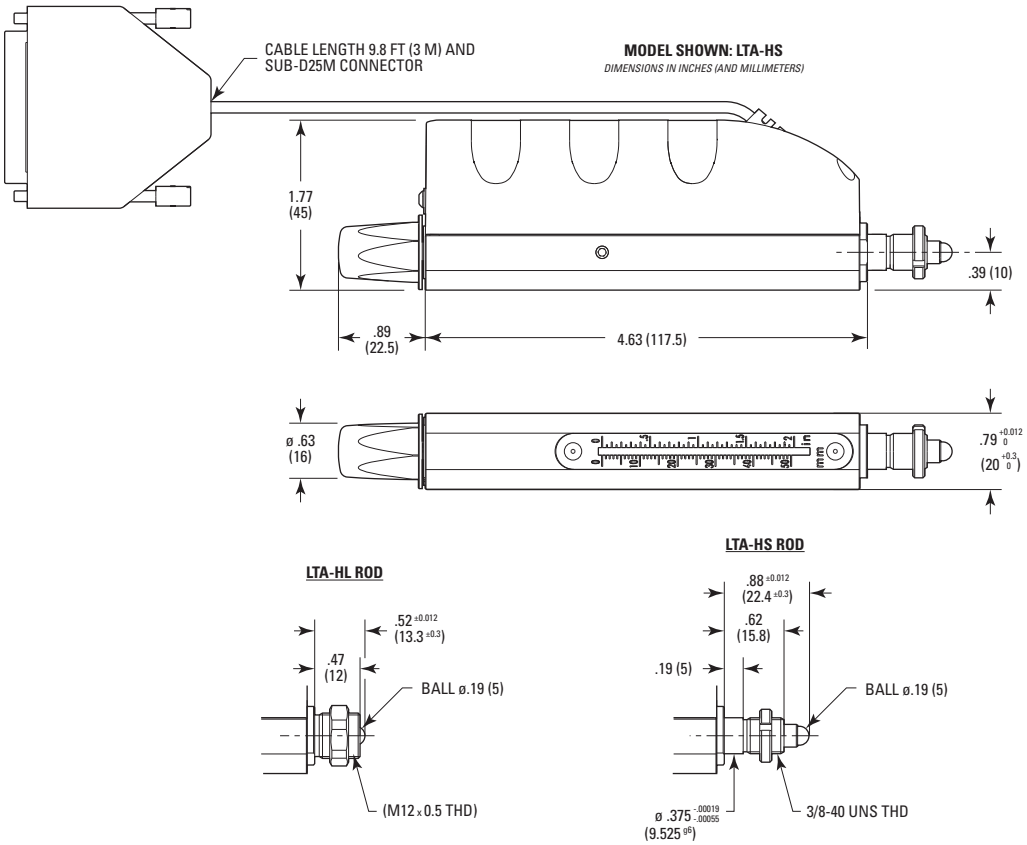

LTA-HSPPV6

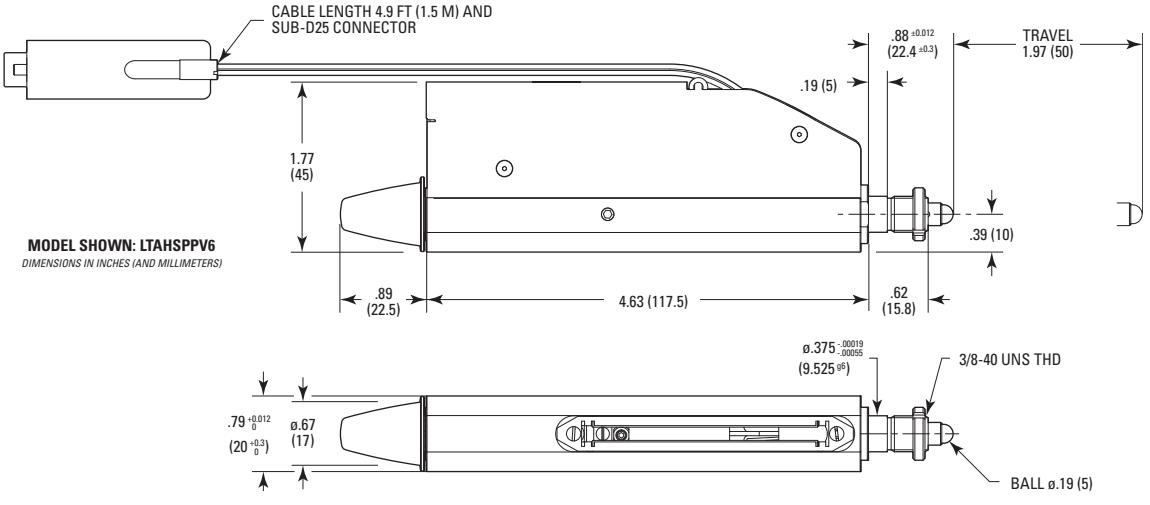

LTA-HLPPV6

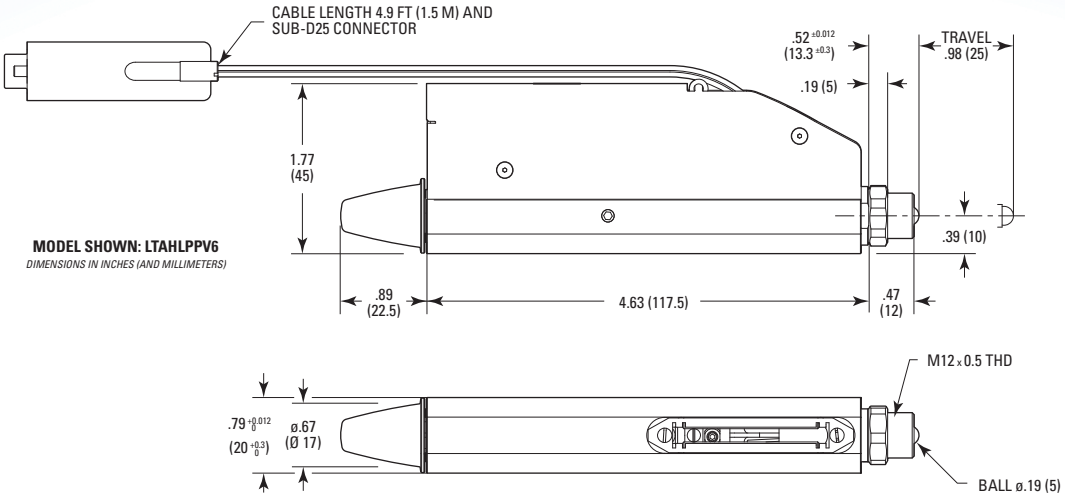

LTA Actuators with CONEX Controllers

The CONEX controller is a very compact and inexpensive driver for low power DC servo and Stepper motor driven devices like our LTA actuators. For out-of-the box control, the CONEX controller is preconfigured and delivered with the actuator.





ORDERING INFORMATION

Model	Description
LTA-HL	High Load Motorized Actuator, 25 mm travel, LTA, M12 thread
LTAHLPPV6	High Load Motorized Actuator, Vacuum Compatible, 25 mm travel, LTA
CONEX-LTA-HL	LTA-HL Actuator, Integrated with CONEX-CC Controller
LTA-HS	High Speed LTA Motorized Actuator, 50 mm travel, LTA, 3/8-40 thread
LTAHSPPV6	High Speed Motorized Actuator, Vacuum Compatible, 50 mm travel, LTA
CONEX-LTA-HS	LTA-HS Actuator, Integrated with CONEX-CC Controller

ACCESSORIES

Model	Description
LTA-M12	Mounting Adapter, M12-0.5, LTA-HS to UMR8, MVN80 and SL products
ADAPT-BM17-375V6	Mounting Adapter, LTAHSPPV6 to -V6 optical mounts

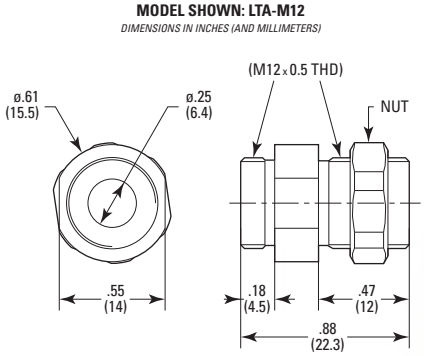

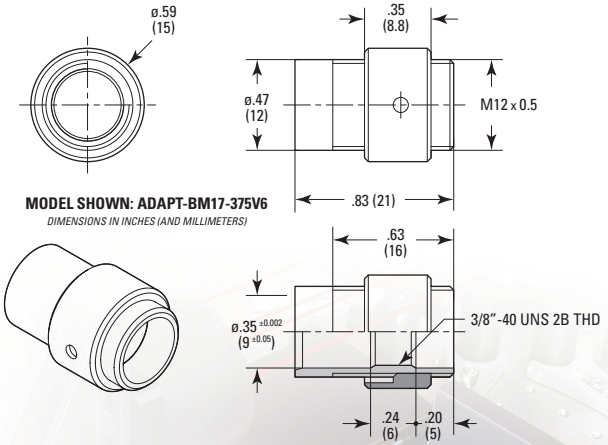

Newport®
Newport Corporation, Global Headquarters
1791 Deere Avenue, Irvine, CA 92606, USA
www.newport.com
PHONE: 1-800-222-6440 1-949-863-3144 FAX: 1-949-253-1680 EMAIL: sales@newport.com
Complete listings for all global office locations are available online at www.newport.com/contact

Newport Corporation, Irvine, California and Franklin, Massachusetts; Evry and Beaune-la-Rolande, France and Wuxi, China have all been certified compliant with ISO 9001 by the British Standards Institution. Santa Clara, California is DNV certified.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP