

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Microsemi / Symmetricom / Datum 6502B* at our website: *Click HERE*

Symmetricom

6502B

RF Distribution Module


KEY FEATURES

- Low Phase Noise
- High Channel Isolation
- Ten Channel Output Distribution
- Daisy Chain For More Than 100 Outputs

The Symmetricom 6502B Distribution Module is a ten channel, RF distribution amplifier packaged in a 1U rack mount chassis. It is comprised of ten, low phase noise RF amplifiers that maintain high channel isolation (>100dB). Up to ten units can be daisy chained together to give up to 100 outputs or each output of one unit can be used as a source for other 6502B units to give almost infinite expansion capability with virtually no signal degradation.

The 6502B standard configuration accepts input frequencies from 0.1MHz to 10MHZ at 1Vrms amplitude and provides ten buffered outputs of the same frequency. Each output and input has an alarm indicator that warns of either a loss of signal or a signal of insufficient amplitude.

The 6502B is also available in custom configurations. Please contact Symmetricom with any specific requirements.

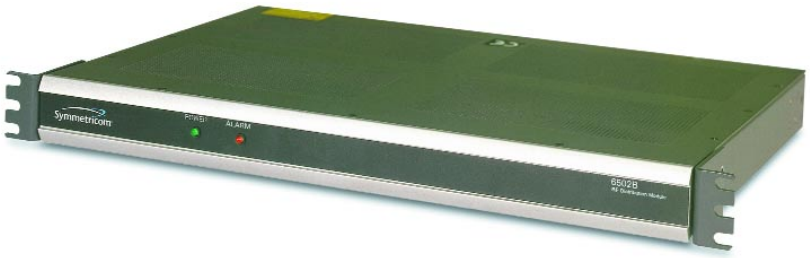

6502B RF Distribution Module

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

6502B Specifications

ELECTRICAL SPECIFICATIONS

- RF output (ten)

Frequency:	0.1 to 10 MHz
Level:	1 V rms (nominal)
Gain:	1 (nominal)
Harmonic distortion:	<-40dB
Non-harmonic signals:	<-80dB
Load impedance:	50Ω
Isolation:	>100dB*
Connectors:	BNC

*Isolation between channels one to ten >130dB

- Additive SSB phase noise

(1 Hz Bandwidth)	Offset from carrier
1 Hz	-120dB
10 Hz	-135dB
100 Hz	-145dB
1,000 Hz	-155dB
10,000 Hz	-160dB

- RF input

Frequency:	0.1 to 10 MHz
Level:	1 V rms (nominal)

- Alarm output

Summary alarm indicates failure of any output signal.

Each output & main:	Red LED
Non-alarm condition:	Relay energized (fail safe) C Form contacts
Alarm output disable:	Panel switch
Connector:	9 pin D-male

- Controls & indicators

Power:	Green LED, power is connected
Alarm:	Red LED, signal output failure

Please note: If input level is less than 10dBm specify low alarm threshold version (-509).

ENVIRONMENTAL & PHYSICAL SPECIFICATIONS

- Temperature (operating): 0°C to 55°C
- Relative humidity: 0 to 95%, non-condensing
- Power requirements

AC input (±15%):	120 or 230 VAC, <10W
DC input (optional):	22 to 70 VDC, 10W

- Dimensions

Height:	1U (~1.75 inches) (4.44 cm)
Width:	19" (48.26 cm)
Depth:	12" (30.48 cm)

- Weight: <5 lbs. (2.25 Kg)

OPTIONS	Part No.
• DC input	102
• Low alarm threshold	509



Rear View

SYMMETRICOM, INC.
2300 Orchard Parkway
San Jose, California
95131-1017
tel: 408.433.0910
fax: 408.428.7896
info@symmetricom.com
www.symmetricom.com

©2004 Symmetricom. Symmetricom and the Symmetricom logo are registered trademarks of Symmetricom, Inc. All specifications subject to change without notice. DS/6502B/D/1004/PDF

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP